



Brands for the offsite industry

Cullen Technical Guide




Innovation. Quality. Service.



**CONSTRUCTION
PRODUCTS**

Contents

| | Page |
|---|----------|
| Information & Services: | |
| Company Profile & Services | 4 – 5 |
| General Guidelines | 6 – 7 |
| Fixings for Cullen Connectors | 8 – 10 |
| Eurocode 5 | 11 |
| Timber To Masonry Connectors: | |
| Masonry Hanger Overview | 12 – 13 |
| JHI Masonry Joist Hanger | 14 – 15 |
| RB-JHI Rapid Build Masonry Joist Hanger | 16 – 17 |
| FMHI Flexible Masonry Hanger | 18 – 20 |
| M-STD/M-RTN Very High Load Masonry Hanger | 21 |
| VSM Variable Skew Masonry Hanger | 22 – 23 |
| RA RANGE Restraint Angle Range | 24 – 27 |
| HV-GR Hi-Vis Gripper | 28 – 29 |
| Timber Frame: | |
| Timber Frame Overview | 30 |
| ST-PFS/ST-PFS-M Timber Frame Holding Down Strap | 31 |
| SP Sole Plate Anchor | 32 |
| IR-CLIP Insulation Retaining Clip | 33 |
| AWS Acoustic Wall Strap | 34 |
| PWS Party Wall Strap | 35 |
| PSTS Paslode Structural Screw (Open Panel Connection) | 36 |
| HRS Head Restraint Screw | 37 |
| RD-CDCR Corner Disproportionate Collapse Restraint | 38 |
| Timber Frame Wall Ties Differential Movement | 39 |
| FT Timber Frame Wall Tie | 40 – 43 |
| FT-125-150 Timber Frame Wall Tie | 44 – 45 |
| HMT High Movement Timber Frame Wall Tie | 46 – 47 |
| UZ Clip Noggin Support | 48 |
| EWP Connectors: | |
| EWP Timber Hanger Overview | 49 – 50 |
| At A Glance UH & HUH Quick Reference Guides | 51 |
| UH Universal Hanger (I-Joist Applications) | 52 – 59 |
| UH Universal Hanger (Open Web Applications) | 60 – 65 |
| HUH Heavy Universal Hanger (I-Joist Applications) | 66 – 69 |
| HUH Heavy Universal Hanger (Open Web Applications) | 70 – 76 |
| Steel Connections | 77 – 79 |
| MH RANGE Multi Hanger | 80 – 81 |
| KM Mini Hanger | 82 |
| FTHI Flexible Timber Hanger | 83 |
| VS Variable Skewed Timber Hanger | 84 – 85 |
| VRC Variable Ridge Connector | 86 – 87 |
| ACE Adjustable Connector Eaves | 88 |
| 45L/R Face Fix 45° Hanger | 89 |
| UZ Clip Noggin Support | 90 – 92 |
| I-Clip Multiple I-Joist Connector | 93 – 94 |
| OW-Clip Multiple Joist Connector | 95 – 96 |
| PSTS Paslode Structural Screw (Multiple Connections) | 97 – 100 |
| SHI Service Hole I-Joist | 101 |

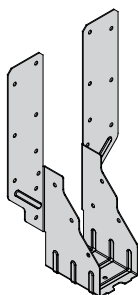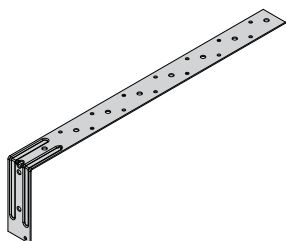Solid Timber/Roof Truss:**Truss To Wall Plate:****Restraint Straps:****Brands for the Offsite Industry****Product Range Index****Page**

| | |
|---|-----------|
| Solid Timber/Roof Truss Overview..... | 102 – 103 |
| KM Mini Hanger | 104 |
| TM Midi Shoe..... | 105 |
| TS Truss Shoe..... | 106 |
| HMH Heavy Multi Hanger..... | 107 |
| HGG Heavy Girder To Girder..... | 108 |
| VHGG Very Heavy Girder To Girder..... | 109 |
| KH Kwiki Hanger Standard Leg | 110 |
| KHL Kwiki Hanger Long Leg..... | 111 |
| MH RANGE Multi Hanger | 112 – 113 |
| FTHI Flexible Timber Hanger | 114 |
| LAB Angle Bracket | 115 |
| SA-45 Skewed Angle 45° Hanger..... | 116 |
| 45L/R Face Fix 45° Hanger..... | 117 |
| VS Variable Skewed Timber Hanger..... | 118 – 119 |
| NP Nail Plate..... | 120 |
| SB Support Bracket..... | 121 |
| Wallplate Connection Overview..... | 122 |
| TC Truss Clip..... | 123 |
| TA Truss Anchor | 124 – 125 |
| TA-1 Framing Anchor..... | 126 |
| FAS Framing Anchor | 127 |
| SS Slide Shoe..... | 128 |
| Restraint Overview | 129 |
| Restraint Straps (Domestic Floors)..... | 130 – 131 |
| Restraint Straps (Domestic Roofs)..... | 132 – 135 |
| GRB Gable Restraint Bracket..... | 136 |
| RST Restraint Strap Twist..... | 137 |
| VRS Vertical Restraint Strap..... | 138 |
| LDGS Light Duty Galvanised Strap | 139 |
| PFS Pre Formed Strap..... | 140 |
| PS RANGE Pre Formed Strap | 141 |
| Brands for the Offsite Industry | 142 |
| Product Range Index | 144 |

Company Profile & Services

ITW Construction Products Offsite

ITW Construction Products Offsite is part of the Illinois Toolworks family, an international corporation with over **100 years in the building and manufacturing industry.**

We are a **trusted partner to leading offsite component manufacturers**, allowing our customers to design, manufacture and sell the highest quality roof, floor and wall components.

Our collaborative and problem-solving approach ensures we remain a leader in technology, research and development – providing innovative solutions, support and superior service with market leading brands **Cullen, Gang-Nail, Paslode and SPIT.**



Cullen

Cullen timber engineering connectors have been synonymous with innovation and quality for over 40 years.

Becoming part of ITW Construction Products Offsite in 2008, Cullen has benefitted from the expertise and resources of a global corporation allowing them to grow, invent and create more than before.

Designing and manufacturing a complete range of timber engineering connectors, Cullen is at the forefront of market trends, ideas and needs. Chosen for their highest quality and compliance of UKCA, EN845-1 and Eurocode 5, our timber engineering solutions will become a mainstay of your most valued business assets.

Illinois Toolworks Inc. (NYSE: ITW)

ITW is a Fortune 500 global multi-industrial manufacturing leader. The company's seven industry-leading segments leverage the unique ITW Business Model to drive solid growth in markets where highly innovative, customer-focused solutions are required.

ITW's products and solutions are at work all over the world, in deep-sea oil rigs, aerospace technology, the spaces in which we live and work, the construction of those spaces, the cars we drive, and the mobile devices we rely on.

ITW is committed to operational excellence and systematic new product development that helps our customers create the products and services that make their operations run smoothly.



Service Team

We recognise that outstanding service is crucial in the construction industry and can assure a positive experience from a dedicated team of experts. With our service team, you are fully supported by our highly qualified technical teams. With decades of experience, our technical experts are ready to offer assistance in timber engineering related matters.

Our skilled professionals are not only experts within ITW, but they also play a **leading role in the industry's representative bodies across the globe.**

What makes us unique is that we have team members who are constantly involved in **finding and developing innovative solutions to future challenges** with these industry bodies. Assisting and driving the creations and updates for building legislation and standards.

Our customer service team plays an important role delivering a best in class customer experience.

They can assist you with:

- Processing your orders
- Providing pricing and delivery information
- Answering questions and queries
- Putting you in touch with the correct member of our organization

Available Monday to Friday from 8.30am – 4:30pm.

Experience in Innovation

We remain a leader in technology, research and development, regularly collaborating along the value chain. We are constantly working with construction experts to create future-proof and innovative compliant solutions that increase productivity and solves industry problem.

Our state of the art research facility in Glenrothes, Scotland includes an Instron test rig and timber conditioning chamber to allow fast track prototyping and testing.

With more than 100 years of experience in manufacturing globally, our ITW staff are highly trained and experienced in providing high-quality service to customers.

What makes us unique

Our products have made a name for themselves by holding positions in niche markets where ITW technology can address customers' unique needs like higher global standards for safety and energy efficiency as well as the growth of offsite construction projects.

We are a fully integrated supply partner for all things related to the offsite and prefab industry in UK, Ireland and Nordics.

With an experienced team, premium fixings and our own metalwork brand, **we are the only company that can provide a holistic service for all your truss, panel, joist and metalwork needs.**



Scan to access our
Technical Portal

Technical requests can be submitted
24/7 by emailing us on
technical@itwcp.com

Should you wish to call Technical Service or Customer Service, our phone lines are available Monday to Friday from
8.30am – 4.30pm

+44(0) 1592 771132

Customer Service: orders@itwcp.com
[itwcp-offsite.co.uk](https://www.itwcp-offsite.co.uk)

General Guidelines

Technical Information

The technical information contained in this brochure is correct at the time of updating. ITW Construction Products Offsite reserve the right to amend, change or update the technical information without giving prior notice. For current product updates and technical information, visit our website www.itwcp-offsite.co.uk

The contents of this brochure and the latest product updates posted on the website supersede all previous Cullen publications including all brochures, installation guides, manuals and information sheets.

If you would like to be informed of new Cullen products, please visit our website.

All characteristic capacities are derived from tests and are underwritten by ITW Construction Products Offsite. All characteristic values are derived from tests carried out by independent accredited test labs (unless otherwise stated). Cullen European Technical Approvals (ETA) have been submitted for approval using British Board of Agrément (BBA) as the approved notified body.

General Installation Information

- Proper product installation and construction practices must be followed at all times.
- Timber members and Engineered Wood Products may split when nailed; this may reduce their characteristic capacity.
- To achieve the characteristic capacities published all specified nails and fastenings must be used and installed as per the instructions set out in this brochure.
- Failure to follow proper nailing procedures and instructions will reduce the characteristic capacities.
- **Only bend Cullen connectors when directed to by the appropriate Cullen installation guide, and when necessary “only bend once”.**

Design Information

- The integrity of the building or structure must be validated by a suitably qualified Building Designer or Engineer (the “Designer”).
- The Designer is responsible for determining that the appropriate connector and/or hanger has been selected.
- Location and spacing of straps must be specified by the Designer.
- When selecting the appropriate connector and/or hanger, consideration must be given to the safe working loads or characteristic capacities required, bearing support and connection details within the building or structure.
- **For all Engineered Wood Products (EWP), ITW Construction Products Offsite recommends the hanger height be at least 60% of the joist height for lateral stability.**
- Any bespoke Cullen product designed by ITW Construction Products Offsite but manufactured by another (unless directed to by ITW Construction Products Offsite) will not be covered under ITW Construction Products Offsite’s warranty.
- ITW Construction Products Offsite reserve the right to (i) change the design specifications and applications of any connector/hanger, or (ii) withdraw any connector or hanger without giving prior notice.

NB. Any modification to any Cullen custom-made or manufactured connector and/or hanger product will void any warranty given by Cullen in relation to that particular connector and/or hanger product.

Galvanised Protection

Z275 galvanised coating is the minimum corrosion protection recommended for Service Class 2 applications (BS EN1995–1–1 Table 4.1 Examples of minimum specification for material protection against corrosion for fasteners).

Z600 galvanised coating gives a greater corrosion protection for use with masonry applications (BS EN845–1 Annex A1, Table A.1 Materials and corrosion protection systems).

Service Classes (BS EN1995–1–1 section 2.3.1.3)

- (1) P Structures shall be assigned to one of the service classes given below.

NOTE: The service class system is mainly aimed at assigning strength values and for calculating deformations under defined environmental conditions.

NOTE: Information on the assignment of structures to service classes given in (2)P, (3)P and 4(P) may be given in the National Annex.

- (2) P Service class 1 is characterised by a moisture content in the materials corresponding to a temperature of 20°C and the relative humidity of the surrounding air only exceeding 65% for a few weeks per year.

NOTE: In service class 1 the average moisture content in most softwoods will not exceed 12%.

- (3) P Service class 2 is characterised by a moisture content in the materials corresponding to a temperature of 20°C and the relative humidity of the surrounding air only exceeding 85% for a few weeks per year.

NOTE: In service class 2 the average moisture content in most softwoods will not exceed 20%.

- (4) P Service class 3 is characterised by climatic conditions leading to higher moisture contents than in service class 2.

UK National annex to BS EN1995–1–1 states the following service classes for these applications:

| Type of Construction | Service Class |
|---|---------------|
| Cold roofs | 2 |
| Warm roofs | 1 |
| Intermediate floors | 1 |
| Ground floors | 2 |
| Timber-frame walls, internal and party walls | 1 |
| Timber-frame walls, external walls | 2 |
| External uses where member is protected from direct wetting | 2 |
| External uses, fully exposed | 3 |

Environmental Product Declarations

Our products come with certified Environmental Product Declarations (EPDs), ensuring standardized, third-party-verified data on their environmental impact. These documents adhere to international standards, providing clear insights into factors like carbon footprint, energy consumption, and resource use. This transparency helps customers seamlessly incorporate our products into their systems while meeting environmental reporting goals and requirements.

Fixings For Cullen Connectors


Fixings for Cullen

This section sets out to simplify the specification of ITW Construction Products Offsite fasteners and fastening systems for use with Cullen timber engineered connectors. These fasteners have been tested in conjunction with the Cullen connectors, meaning that **published design values are underwritten by ITW Construction Products Offsite** if used together.

Fastening Cullen Connectors

To achieve the characteristic capacities published in this Cullen Technical Guide and specified by roof truss or floor joist design software, connectors must be installed using the correct number and type of fasteners.

The fasteners in this section have been assessed and qualified as suitable for use with Cullen connectors. **All published values are underwritten by ITW Construction Products Offsite.** Using an unqualified or alternative fastener could result in a reduced connector capacity and the design values not being underwritten.

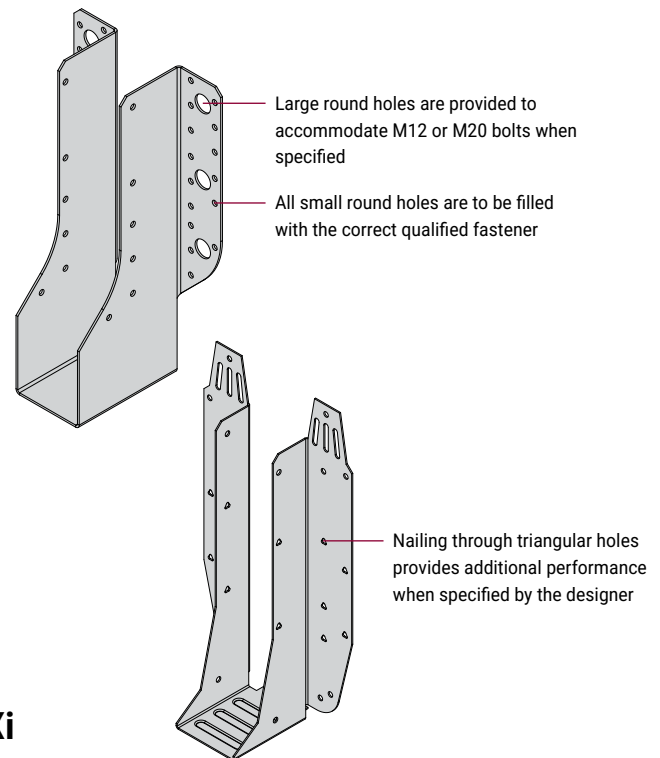

Paslode Gas Positive Placement Nailer PPNXi



| Product Code | Description |
|--------------|--|
| 019790 | PPNXi Li-ion Gas Positive Placement Nailer |

Paslode PPNXi Li-ion Gas Positive Placement Nailer
Drives UKCA/CE compliant hardened twist nails through connectors and hangers into solid wood beams.

Nail Specification

| | | |
|---------------------------|-----------------------|--------|
| Product Code: | 141189 | 141185 |
| Box Qty: | 1,250 | 2,500 |
| Shank Type: | Square Twist Hardened | |
| Shank Diameter: | 3.4mm | |
| Length: | 35mm | |
| Head Diameter: | 7.0mm | |
| Average Profile Diameter: | 3.7mm | |
| Finish: | 12µm Electro Galv | |



Paslode Pneumatic Positive Placement Nailer



| Product Code | Description |
|--------------|--|
| 500855 | F250S PP Pneumatic Positive Placement Nailer |

Paslode F250S PP Pneumatic Positive Placement Nailer
Drives UKCA/CE compliant hardened twist nails through connectors and hangers into solid wood beams.

Nail Specification

| | |
|---------------------------|-----------------------|
| Product Code: | 140588 |
| Box Qty: | 3,000 |
| Shank Type: | Square Twist Hardened |
| Shank Diameter: | 3.4mm |
| Length: | 35mm |
| Head Diameter: | 7.0mm |
| Average Profile Diameter: | 3.7mm |
| Finish: | 12µm Electro Galv |



The latest most up to date version will always be online and not in print or in downloaded pdf.

Fixings For Cullen Connectors

Loose Fasteners

3.4 x 35mm Electrogalvanised Square Twist Nails



| | |
|---------------------------|-------------------|
| Product Code: | 547389 |
| Box Qty: | 500 |
| Shank Type: | Square Twist |
| Shank Diameter: | 3.4mm |
| Length: | 35mm |
| Head Diameter: | 8.0mm |
| Average Profile Diameter: | 3.7mm |
| Finish: | 12µm Electro Galv |

Paslode Structural Timber Screws



| | | |
|------------------------------|------------------|------------------|
| Product Code: | See page 95 | See page 95 |
| Box Qty: | 100 | 100 |
| Outer Thread Shank Diameter: | 6.5mm | 8.0mm |
| Plain Shank Diameter: | 4.8mm | 5.85mm |
| Length: | 35 – 250mm | 65 – 175mm |
| Head Diameter: | 11.5mm | 16mm |
| Finish: | 5µm Electro Galv | 5µm Electro Galv |

3.35 x 50mm Stainless Steel Annular Ring Shank Nails



| | | |
|---------------------------|--------------------|-------------------------|
| Product Code: | ST-PFS-FIXING PACK | ST-ST-WALLTIE-NAILS-250 |
| Box Qty: | 150 | 250 |
| Shank Type: | Ring Shank | Ring Shank |
| Shank Diameter: | 3.35mm | 3.35mm |
| Length: | 50mm | 50mm |
| Head Diameter: | – | – |
| Average Profile Diameter: | – | – |
| Finish: | Stainless Steel | Stainless Steel |

SPIT Powder Actuated Tool System




| Product Code | Description |
|--------------|--|
| 011071 | P370 Powder Actuated Tool with Magazine (includes Single Shot Adaptor) |

SPIT P370 Cordless Powder Actuated Tool

For fixing to steel of thickness 5mm to 10mm.

SC9 Collated Drive Pins


| | |
|---------------------------|------------------|
| Product Code: | 011340 |
| Box Qty: | 500 |
| Shank Type: | Drive Pin |
| Shank Diameter: | 4mm |
| Length: | 15mm |
| Head Diameter: | 9.0mm |
| Average Profile Diameter: | – |
| Finish: | 7µm Electro Galv |

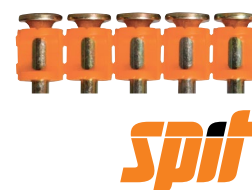

Fixings For Cullen Connectors

BOLTS

M12 BOLT

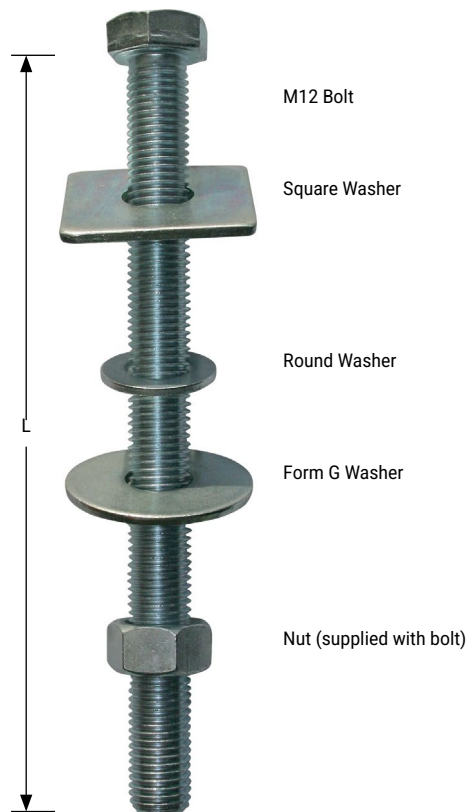

M12 Bolt General Specification

| | |
|--------------------|-------------------|
| Shank Type: | Threaded |
| Shank Diameter: | M12 |
| Head Diameter A/F: | 19.0mm |
| Head Thickness: | 7.5mm |
| Grade: | 8.8 |
| Finish: | >5µm Electro Galv |


M12 Bolt Lengths

| Product Code | Bolt Length (L) (mm) | Description |
|--------------------------|----------------------|---|
| M-12-180-HRH-FULL-THREAD | 180 | M12 x 180mm HRH Bolt (full thread to suit 140 – 180mm bolt length) & Nut |
| M-12-240-HRH-FULL-THREAD | 240 | M12 x 240mm HRH Bolt (full thread to suit 200 – 240mm bolt length) & Nut |

M12 Nuts & Washers

| Product Code | Diameter / Length (mm) | Thickness (mm) | Description |
|--------------|------------------------|----------------|-------------------|
| M-12-ROUND | 24 | 2.5 | M12 Round Washer |
| M-12-FORM-G | 36 | 3.0 | M12 Form G Washer |
| M-12-NUT | 19 A/F | 10.0 | M12 Nut |

M20 BOLT

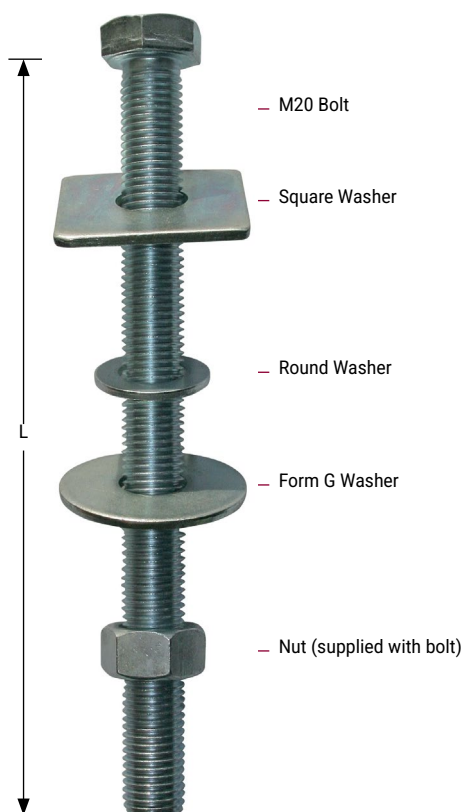

M20 Bolt General Specification

| | |
|--------------------|-------------------|
| Shank Type: | Threaded |
| Shank Diameter: | M20 |
| Head Diameter A/F: | 30.0mm |
| Head Thickness: | 12.5mm |
| Grade: | 8.8 |
| Finish: | >5µm Electro Galv |

M20 Bolt Lengths

| Product Code | Bolt Length (L) (mm) | Description |
|--------------------------|----------------------|---|
| M-20-180-HRH-FULL-THREAD | 180 | M20 x 180mm HRH Bolt (full thread to suit 140 – 180mm bolt length) & Nut |
| M-20-240-HRH-FULL-THREAD | 240 | M20 x 240mm HRH Bolt (full thread to suit 200 – 240mm bolt length) & Nut |

M20 Nuts & Washers

| Product Code | Diameter / Length (mm) | Thickness (mm) | Description |
|--------------|------------------------|----------------|-------------------|
| M-20-ROUND | 36 | 2.5 | M20 Round Washer |
| M-20-FORM-G | 60 | 5.0 | M20 Form G Washer |
| M-20-NUT | 30 A/F | 16.0 | M20 Nut |

Eurocode 5

Eurocode 5 (BS EN1995–1–1)

With BS 5268 part 2 & 3 being officially withdrawn in 2009 & 2010 the UK Trussed Rafter Association & UK Engineered Wood Products Committee have agreed that all designs will now be carried out to EC5.

Eurocode 5 is the harmonised European Standard covering the design of timber structures. The purpose of the Eurocodes is to establish a common set of standards for the design of buildings across all European member states, although each member can have its own National Annex which is used in conjunction with the Eurocodes for design.

Technical Approvals

UK

Timber-to-timber hangers (these are required to be assessed by UK notified body)

With the UK having left the European Union, European Technical Assessments (ETA's) will no longer be accepted in the UK (from 1st January 2023) with timber-to-timber hangers to meet the requirements of UK Technical Assessment document (UKAD) no.130186–00–0603 Three dimensional nailing plates, which allows the hangers to be submitted for UK Technical Assessment (UKTA) which once issued enables the products to be UKCA marked.

Timber-to-masonry products (hangers, straps and wall ties)

Are tested to meet the requirements of the harmonised standard BS EN 845–1 enabling them to be UKCA marked.

Fasteners for timber structures (nails, screws and bolts)

Are tested to meet the requirements of BS EN14592 enabling them to be UKCA marked.

EU

Timber-to-timber (these are required to be assessed by European body notified body)

All timber-to-timber hangers are tested to meet the requirements of European Assessment Document (EAD) no.130186–00–0603 Three dimensional nailing plates, which allows the hangers to be submitted for a European Technical Assessment (ETA) which once issued enables the products to be CE marked.

Timber-to-masonry products (hangers, straps and wall ties)

Are tested to meet the requirements of the harmonised standard BS EN 845–1 enabling them to be CE marked.

Fasteners for timber structures (nails, screws and bolts)

Are tested to meet the requirements of EN14592 enabling them to be CE marked.

Load Tables

BS EN1995–1–1:2004+A1:2014 (EC5) is based on limit state design.

The characteristic capacity of the hanger is based on ultimate limit states and is unfactored.

What does this mean for our products?

Only characteristic values for each product will be published in this guide and any future guides.

The characteristic value is the lower 5th percentile value obtained from test results.

A series of modification factors must be applied to the characteristic value to determine the Design Value.

Timber to Timber Connectors

$$\text{Design Value} = (F_k \times K_{\text{mod}}) / Y_m$$

F_k = Characteristic value

K_{mod} = Modification factor for duration of load and moisture content (EN1995–1–1 table 3.1)

Y_m = Partial factors for material properties and resistance (1.3 for connections – EN1995–1–1 table 2.3)

Timber to Masonry Connectors

$$\text{Design Value} = F_k / Y_m$$

F_k = Characteristic value


Y_m = Partial factors for material properties and resistance (1.5 for masonry – EN845–1)

Example Load Data: UH Hanger Standard Installation – I-Joist Header without Backer Block


| Hanger Depth (mm) | Fixings (3.4x35mm) | | | Characteristic Capacity (kN) | | |
|-------------------|--------------------|-----|----------|------------------------------|----------------|------------|
| | Header | | Incoming | Uplift | I-Joist Header | |
| | Face | Top | | | Solid Flange | LVL Flange |
| 220 | 8 | 2 | 4 | 3.97 | 11.13 | 12.94 |
| 235 | 8 | 2 | 4 | 3.97 | 11.89 | 11.79 |
| 300 | 8 | 2 | 4 | 3.97 | 11.89 | 11.79 |

Masonry Hanger Overview


3 Courses of Masonry Above (675mm)

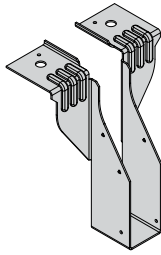


JHI
Pages 14 – 15

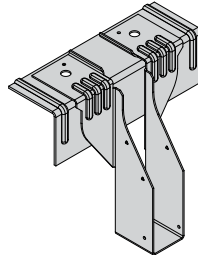


RB-JHI
Pages 16 – 17

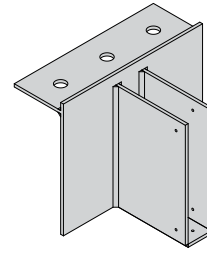


MASONRY-STD
Page 21

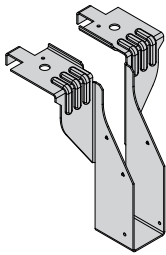


JHIR
Pages 14 – 15

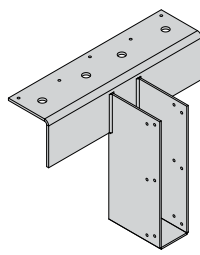

FMHI
Pages 18 – 20

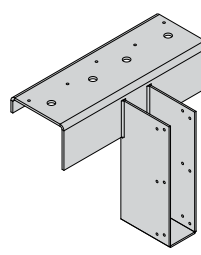

FMHIR
Pages 18 – 20

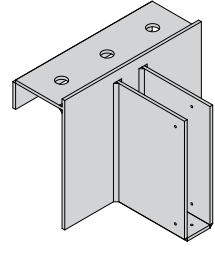


MASONRY-RTN
Page 21


STANDARD

HIGH LOAD


VERY HIGH LOAD

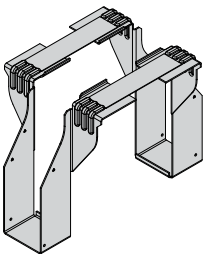


JHIST
Pages 14 – 15

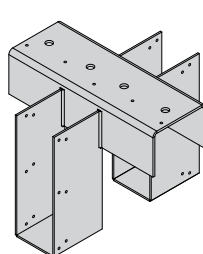

FMHIST
Pages 18 – 20

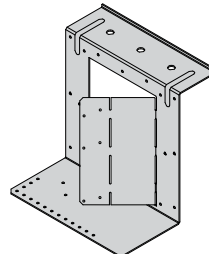


VSM
Pages 22 – 23

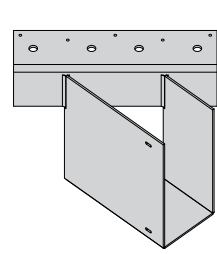


FMHIS
Pages 18 – 20

STRADDLE

SKEWED

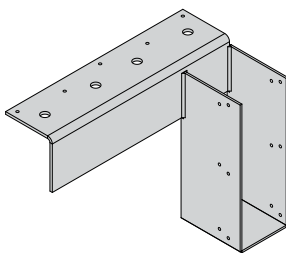

FMHIO
Pages 18 – 20

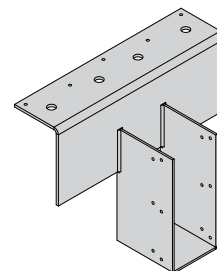


FMHID
Pages 18 – 20

OFFSET


DROPPED

No requirement for masonry above


Unless specified to achieve higher load carrying capacity

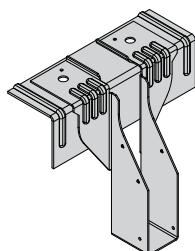

RB-JHI
Pages 16 – 17



MASONRY-STD
Page 21




MASONRY-RTN
Page 21

HIGH LOAD


VERY HIGH LOAD

For skewed hangers with less than 3 courses of masonry above, contact Cullen Technical on 01592 771132


Restraint Hangers

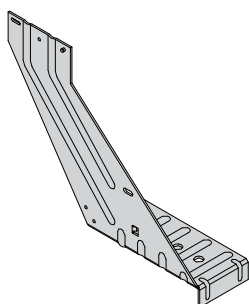

RA
Pages 24 – 27

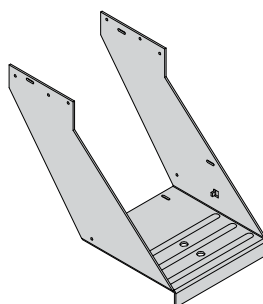

HRAD
Pages 24 – 27

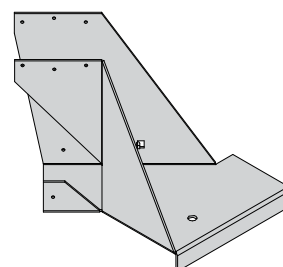


RADS
Pages 24 – 27

STANDARD


HIGH LOAD & >97MM WIDE

SKewed

Ancillary Products

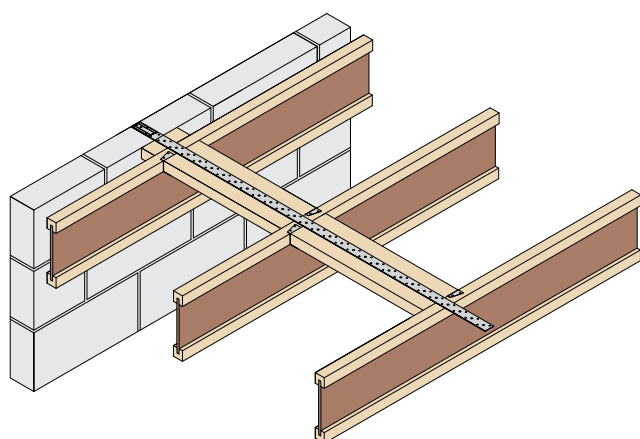

Restraint Straps
Pages 130 – 131

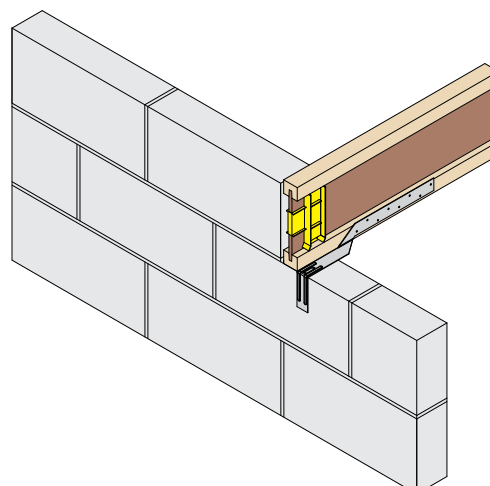

I-Joist End Seal
Pages 28 – 29

Masonry Joist Hanger

European Community Registered Design



The JHI hanger is a traditional timber to masonry hanger range designed for use with I-Joists, open web & solid timber joists/trusses.

Features & Benefits

- The same air leakage values of a wall with no protrusions, forming a major contribution towards Part L1 Building Regulations
- Approved and tested for use with H&H Thin Joint System (Contact Technical for approved installation guide)

Material Specification

- Galvanised mild steel – Z600

Fixings

Fixings required into incoming member only. No fixings required into masonry.

| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi

Available Sizes – JHI/JHIST/JHIR⁽¹⁾

| Hanger Width (W) (mm) | Hanger Depth (H) (mm) | | | | | | |
|--------------------------|-----------------------|----------------------------|-------------|-------------|-------------|------------|-------------|
| | 150 | 225 | 240 | 250 | 300 | 350 | 400 |
| 39 | JHI-39-150 | JHI-39-225 ⁽¹⁾ | JHI-39-240 | – | JHI-39-300 | – | JHI-39-400 |
| 46 | – | – | – | – | – | – | – |
| 50 | JHI-50-150 | JHI-50-225 ⁽¹⁾ | JHI-50-240 | JHI-50-250 | JHI-50-300 | – | – |
| 55 | – | JHI-55-225 | – | – | JHI-55-300 | – | – |
| 61 | – | JHI-61-225 | JHI-61-240 | – | JHI-61-300 | – | – |
| 65 | – | JHI-65-225 | JHI-65-240 | – | JHI-65-300 | – | – |
| 75 | JHI-75-150 | JHI-75-225 ⁽¹⁾ | JHI-75-240 | JHI-75-250 | JHI-75-300 | JHI-75-350 | JHI-75-400 |
| 92 | – | JHI-92-225 ⁽¹⁾ | – | – | JHI-92-300 | – | – |
| 100 | – | JHI-100-225 ⁽¹⁾ | JHI-100-240 | JHI-100-250 | JHI-100-300 | – | JHI-100-400 |
| 110 | – | JHI-110-225 | – | – | – | – | – |
| 122 | – | JHI-122-225 | – | – | – | – | – |
| 125 | – | JHI-125-225 | JHI-125-240 | JHI-125-250 | JHI-125-300 | – | – |
| 130 | – | – | JHI-130-240 | – | – | – | – |
| 150 | – | JHI-150-225 | – | JHI-150-250 | JHI-150-300 | – | – |
| 198 | – | JHI-198-225 | – | JHI-198-250 | JHI-198-300 | – | – |


(1) Sizes available as return (to suit 100mm block work only)



ALL RETURN AND NON-RETURN HANGERS REQUIRE 675MM OF MASONRY ABOVE

Dimensions (mm)


JHI – 39-138MM WIDE

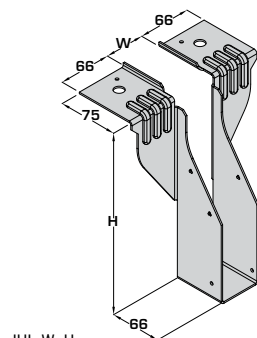

JHI-W-H

Example: JHI-50-225


JHI – 144-198MM WIDE

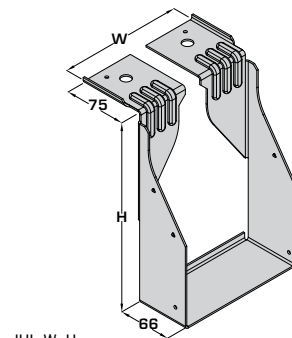

JHI-W-H

Example: JHI-150-225

JHIR – RETURN

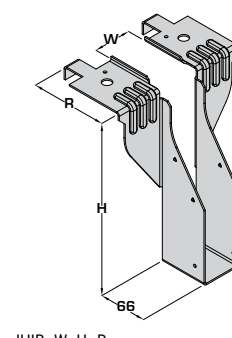

JHIR-W-H-R


Example: JHIR-50-225-100

Only sizes marked (1) available

(Returns available to suit 100mm block work only)

JHIST – STRADDLE

JHIST straddle hangers not suitable for use on separating walls due to fire resistance/sound transference.

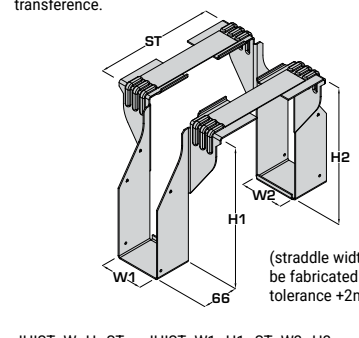

JHIST-W-H-ST or JHIST-W1-H1-ST-W2-H2

Example: JHIST-50-225-100

Example: JHIST-50-225-100-75-225


(Straddles available 100-200mm)

(straddle widths will be fabricated with a tolerance +2mm)

Masonry Joist Hanger

European Community Registered Design

In Situ

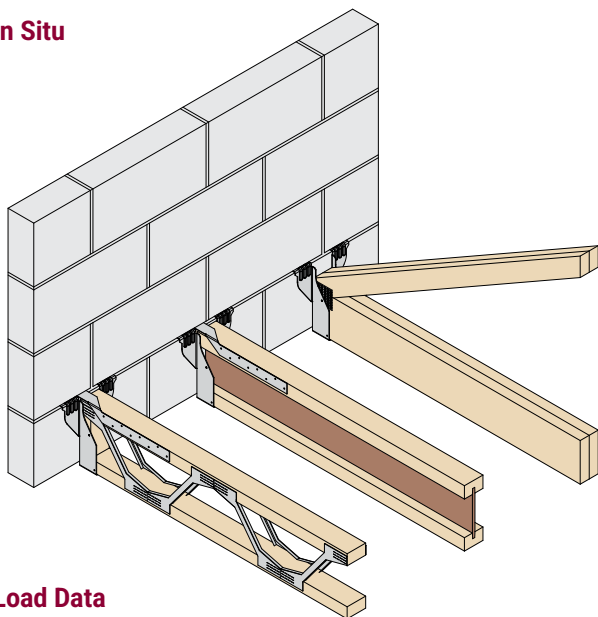

- Suitable for use with Open Web Joists, I-Joists and trusses
- Floor can be propped with acroprops and fully decked but must not be fully loaded until the masonry above has fully cured



- A minimum of 3 courses (675mm) of masonry above is required for hanger to achieve loads stated
- The masonry above must be fully cured for 28 days prior to loading the floor
- All hangers in this range do not provide restraint, therefore restraint straps may be required for joist applications (see pages 130 – 131)

Load Data

| Product Code | Masonry Above (Min 675mm) | Fixings (3.4 x 35mm) | Characteristic Capacity (kN) | | | |
|----------------------|------------------------------|-------------------------|------------------------------|------------------------------------|------------------------------------|---|
| | | Incoming | Uplift | Masonry Crushing Strength | | |
| | | | | 2.8N/mm ² All widths | 3.5N/mm ² All widths | 7.0N/mm ² 39 – 100mm wide 122 – 198mm wide |
| JHI JHIR JHIST | Yes | 2 | 2.00 | 11.17 | 13.97 | 23.04 |
| | | 5 ⁽²⁾ | 4.50 | | | |


Enhanced Uplift⁽²⁾

- Fixings into the incoming joist/truss are required to resist uplift
- Increased uplift figures can be achieved by nailing the additional triangular nail holes into the incoming member
- Web stiffeners required for I-Joists, 2No end blocks required for Open Web Joists & minimum bottom chord depth/vertical required for trusses
- Requires minimum full storey of masonry above to achieve values


| Hanger Depth (mm) | Min Timber Depth (mm) |
|-------------------|-----------------------|
| 150 | 84 |
| 175 – 195 | 122 |
| 225 – 240 | 172 |
| 250 | 195 |
| 300 | 235 |
| 350 | 300 |
| 400 | 350 |




Incorrect Installation

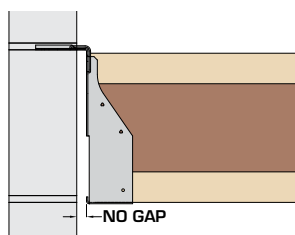


Do not install the hanger with a gap between the hanger and the face of the block work.

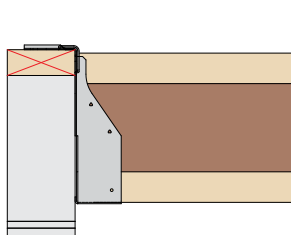

Do not install the hanger onto a timber wall plate.

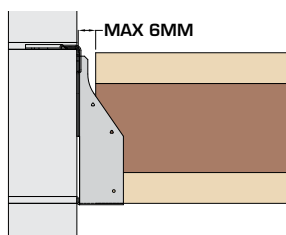


Do not install the hanger with a gap exceeding 6mm between the joist/truss and the hanger.



Do not flatten the 5mm upstands on the hanger top flanges. These are critical to the performance.

RB-JHI

Rapid Build Masonry Joist Hanger

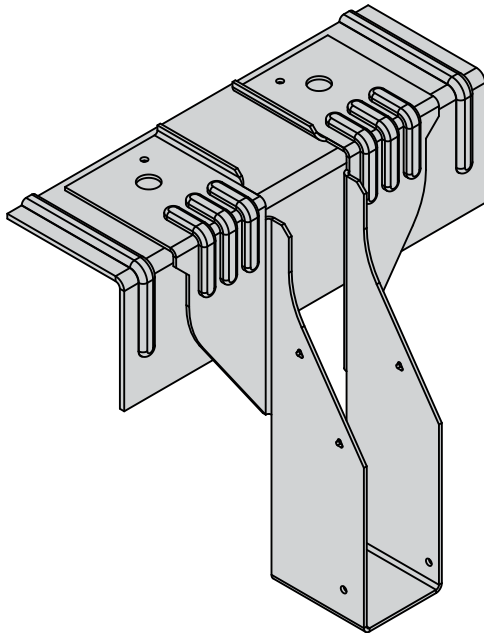

The RB-JHI hanger is a timber to masonry hanger range designed for use with I-Joists, open web & solid timber joists/trusses. The RB-JHI combines the standard JHI hanger with a reinforced top plate to provide a superior level of performance.

Features & Benefits

- The addition of the reinforced top plate keeps the hanger in position eliminating the need for masonry above (unless required for further additional performance)
- Supporting block work only needs to cure for 3 days instead of the standard 28 days for traditional masonry hangers, speeding up the build process
- A major contribution to compliance with air leakage – Part L1 Building Regulations

Material Specification

- Galvanised mild steel – Z600

Fixings

Fixings required into incoming member only. No fixings required into masonry.

| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |


*For use with Paslode PPNXI

Available Sizes – RB-JHI

| Hanger Width (W) (mm) | Hanger Depth (H) (mm) | | | | | | |
|-----------------------|-----------------------|----------------|----------------|----------------|----------------|----------------|----------------|
| | 150 | 225 | 240 | 250 | 300 | 350 | 400 |
| 39 | RB-JHI-39-150 | RB-JHI-39-225 | – | RB-JHI-39-250 | RB-JHI-39-300 | – | – |
| 50 | RB-JHI-50-150 | RB-JHI-50-225 | RB-JHI-50-240 | RB-JHI-50-250 | RB-JHI-50-300 | – | – |
| 55 | – | RB-JHI-55-225 | – | – | – | – | – |
| 61 | – | RB-JHI-61-225 | – | – | RB-JHI-61-300 | – | – |
| 65 | – | – | – | – | – | – | – |
| 72 | – | – | RB-JHI-72-240 | – | – | – | – |
| 75 | RB-JHI-75-150 | RB-JHI-75-225 | RB-JHI-75-240 | RB-JHI-75-250 | RB-JHI-75-300 | – | RB-JHI-75-400 |
| 92 | – | RB-JHI-92-225 | – | – | RB-JHI-92-300 | – | – |
| 100 | RB-JHI-100-150 | RB-JHI-100-225 | RB-JHI-100-240 | RB-JHI-100-250 | RB-JHI-100-300 | – | RB-JHI-100-400 |
| 110 | – | RB-JHI-110-225 | – | – | – | – | – |
| 122 | – | RB-JHI-122-225 | – | – | – | – | – |
| 125 | – | RB-JHI-125-225 | – | RB-JHI-125-250 | RB-JHI-125-300 | RB-JHI-125-350 | RB-JHI-125-400 |
| 130 | – | RB-JHI-130-225 | – | – | RB-JHI-130-300 | – | – |
| 138 | – | RB-JHI-138-225 | – | – | – | – | – |
| 144 | – | RB-JHI-144-225 | – | – | RB-JHI-144-300 | – | – |
| 150 | – | RB-JHI-150-225 | RB-JHI-150-240 | RB-JHI-150-250 | RB-JHI-150-300 | – | RB-JHI-150-400 |
| 198 | – | RB-JHI-198-225 | – | RB-JHI-198-250 | RB-JHI-198-300 | – | – |
| 225 | – | RB-JHI-225-225 | – | – | – | – | – |
| 250 | – | RB-JHI-250-225 | – | RB-JHI-250-250 | – | – | – |

Dimensions (mm)


RB-JHI – 39-138MM WIDE

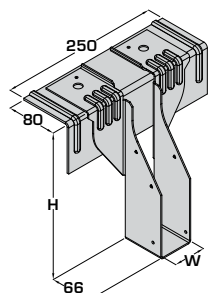

RB-JHI-W-H

Example: RB-JHI-50-225

RB-JHI – 144-198MM WIDE

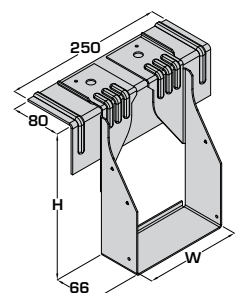


RB-JHI-W-H

Example: RB-JHI-150-225

RB-JHI

Rapid Build Masonry Joist Hanger

In Situ

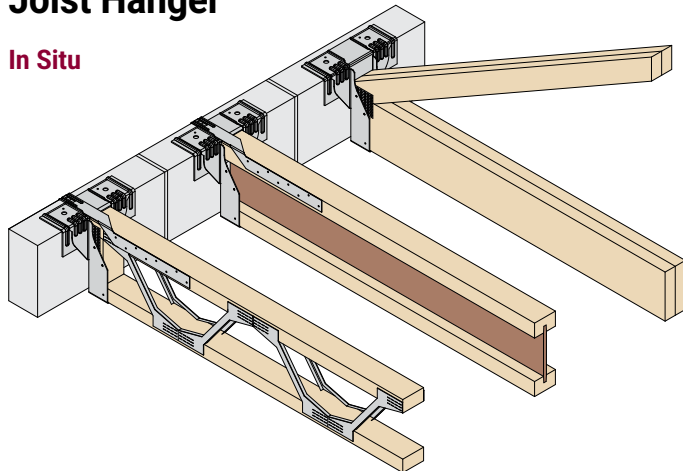

- Suitable for use with Open Web Joists, I-Joists and trusses
- Non return hangers are suitable with no masonry above. Return only required for increased load capacity



- **No masonry** is required above the hanger (unless stated for increased load capacity).
- The masonry supporting the hanger must be cured for **3 days** prior to loading the floor.
- The RB-JHI/RB-JHIR does not provide restraint, therefore restraint straps may be required (see pages 130 – 131)

Load Data

| Hanger Type | Masonry Above (Min 675mm) | Fixings (3.4 x 35mm) | Characteristic Capacity (kN) | | | |
|-------------|---------------------------|----------------------|------------------------------|---------------------------|----------------------|----------------------|
| | | | Uplift | Masonry Crushing Strength | | |
| | | Incoming | | 2.8N/mm ² | 3.5N/mm ² | 7.0N/mm ² |
| RB-JHI | No | 2 | n/a | 12.56 | 15.71 | 21.26 |
| RB-JHI | Yes | 2 | 2.00 | 19.83 | 24.79 | 39.60 |
| | | 5 ⁽²⁾ | 4.50 | | | |


Enhanced Uplift⁽²⁾

- Fixings into the incoming joist/truss are required to resist uplift
- Increased uplift figures can be achieved by nailing the additional triangular nail holes into incoming member
- Web stiffeners required for I-Joists, 2No end blocks required for Open Web Joists & minimum bottom chord depth/vertical required for trusses
- Requires minimum full storey of masonry above to achieve values


| Hanger Depth (mm) | Min Timber Depth (mm) |
|-------------------|-----------------------|
| 150 | 84 |
| 175 – 195 | 122 |
| 225 – 240 | 172 |
| 250 | 195 |
| 300 | 235 |
| 350 | 300 |
| 400 | 350 |




Incorrect Installation

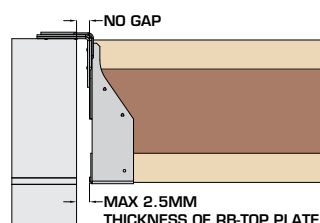


Do not install the hanger with a gap between the hanger and the face of the block work.

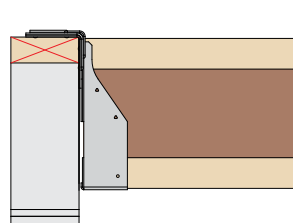

Do not install the hanger onto a timber wall plate.

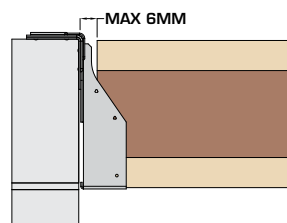

Do not install the hanger with a gap exceeding 6mm between the joist/truss and the hanger.

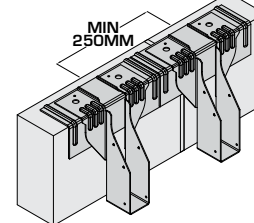

Do not cut/modify the top flanges. These are critical to the performance.

FMHI

Flexible Masonry Hanger



The FMHI hanger is used to support joists and trusses from masonry walls in high load situations with or without masonry above.

Features & Benefits

- Increased top flange to allow for greater load distribution
- Options available for skewed, offset, dropped and straddle connections

Material Specification

- 4mm top plate & 3mm stirrup – mild steel with zinc undercoat and an organic bituminous top coat to BS EN845-1:2013+A1:2016

Fixings

Fixings required into incoming member only.

| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

FMHI – 4mm top plate, 3mm stirrup, 100mm bearing
FTHI – 4mm top plate, 4mm stirrup, 150mm bearing

Available Sizes


*For use with Paslode PPNXi

| Hanger Width (W) (mm) | Hanger Depth (H) (mm) | | | | | | | | |
|--------------------------|-----------------------|-------------|--------------|------------------|------------------|------------------|------------------|------------------|------------------|
| | 150 | 175 | 195 | 225 | 240 | 250 | 300 | 350 | 400 |
| 39 | – | – | FMHI-39-195 | FMHI-39-225 | FMHI-39-240 | FMHI-39-250 | FMHI-39-300 | FMHI-39-350 | FMHI-39-400 |
| 46 | – | – | FMHI-46-195 | FMHI-46-225 | FMHI-46-240 | FMHI-46-250 | FMHI-46-300 | FMHI-46-350 | FMHI-46-400 |
| 50 | – | – | FMHI-50-195 | FMHI-50-225 | FMHI-50-240 | FMHI-50-250 | FMHI-50-300 | FMHI-50-350 | – |
| 55 | – | – | – | RB-JHI-55-225** | FMHI-55-240 | – | RB-JHI-55-300** | – | – |
| 61 | – | – | FMHI-61-195 | RB-JHI-61-225** | RB-JHI-61-240** | – | RB-JHI-61-300** | FMHI-61-350 | FMHI-61-400 |
| 65 | FMHI-65-150 | – | FMHI-65-195 | RB-JHI-65-225** | RB-JHI-65-240** | FMHI-65-250 | RB-JHI-65-300** | FMHI-65-350 | – |
| 72 | – | – | FMHI-72-195 | RB-JHI-72-225** | RB-JHI-72-240** | – | RB-JHI-72-300** | FMHI-72-350 | FMHI-72-400 |
| 75 | – | – | FMHI-75-195 | FMHI-75-225 | FMHI-75-240 | FMHI-75-250 | FMHI-75-300 | FMHI-75-350 | FMHI-75-400 |
| 78 | – | – | FMHI-78-195 | FMHI-78-225 | FMHI-78-240 | FMHI-78-250 | FMHI-78-300 | FMHI-78-350 | FMHI-78-400 |
| 92 | FMHI-92-150 | FMHI-92-175 | FMHI-92-195 | FMHI-92-225 | FMHI-92-240 | FMHI-92-250 | FMHI-92-300 | FMHI-92-350 | FMHI-92-400 |
| 100 | – | – | FMHI-100-195 | FMHI-100-225 | FMHI-100-240 | FMHI-100-250 | FMHI-100-300 | FMHI-100-350 | FMHI-100-400 |
| 110 | – | – | – | RB-JHI-110-225** | FMHI-110-240 | – | FMHI-110-300 | – | – |
| 122 | – | – | FMHI-122-195 | RB-JHI-122-225** | RB-JHI-122-240** | – | RB-JHI-122-300** | FMHI-122-350 | FMHI-122-400 |
| 125 | – | – | FMHI-125-195 | FMHI-125-225 | FMHI-125-240 | RB-JHI-125-250** | FMHI-125-300 | FMHI-125-350 | FMHI-125-400 |
| 130 | – | – | FMHI-130-195 | RB-JHI-130-225** | RB-JHI-130-240** | – | RB-JHI-130-300** | FMHI-130-350 | – |
| 138 | – | – | FMHI-138-195 | RB-JHI-138-225** | RB-JHI-138-240** | FMHI-138-250 | FMHI-138-300 | FMHI-138-350 | FMHI-138-400 |
| 144 | – | – | FMHI-144-195 | RB-JHI-144-225** | FMHI-144-240 | – | RB-JHI-144-300** | FMHI-144-350 | FMHI-144-400 |
| 150 | – | – | – | RB-JHI-150-225** | RB-JHI-150-240** | RB-JHI-150-250** | RB-JHI-150-300** | RB-JHI-150-350** | RB-JHI-150-400** |
| 183 | – | – | FMHI-183-195 | FMHI-183-225 | FMHI-183-240 | – | FMHI-183-300 | FMHI-183-350 | FMHI-183-400 |
| 198 | – | – | FMHI-198-195 | RB-JHI-198-225** | RB-JHI-198-240** | RB-JHI-198-250** | RB-JHI-198-300** | FMHI-198-350 | FMHI-198-400 |
| 225 | – | – | – | RB-JHI-225-225** | RB-JHI-225-240** | RB-JHI-225-250** | RB-JHI-225-300** | FMHI-225-350 | FMHI-225-400 |
| 250 | – | – | – | RB-JHI-250-225** | FMHI-250-240 | RB-JHI-250-250** | RB-JHI-250-300** | FMHI-250-350 | FMHI-250-400 |
| 300 | – | – | – | FMHI-300-225 | – | FMHI-300-250 | FMHI-300-300 | FMHI-300-350 | FMHI-300-400 |

**FMHI hanger can be swapped directly with RB-JHI


Dimensions (mm)

FMHI 39 – 144MM WIDE

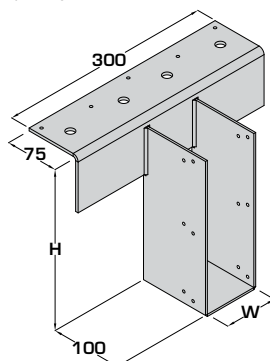

FMHI-W-H
Example: FMHI-100-225

FMHI 150 – 300MM WIDE

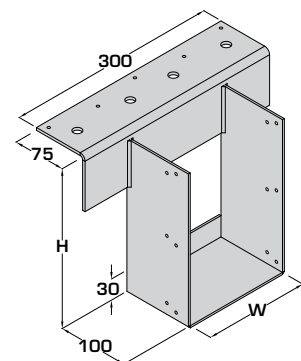


FMHI-W-H
Example: FMHI-225-350

FMHI


Dimensions (mm) continued

FMHI

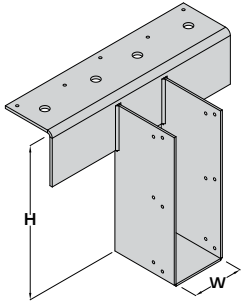


FMHI-W-H
Example:
FMHI-75-225

FMHIR – RETURN

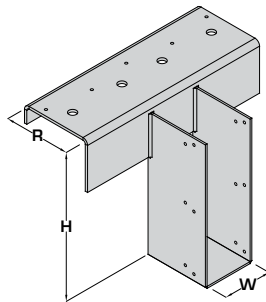


FMHIR-W-H-R
Example:
FMHIR-100-225-100
(2mm added to return for tolerance)

FMHIO – OFFSET

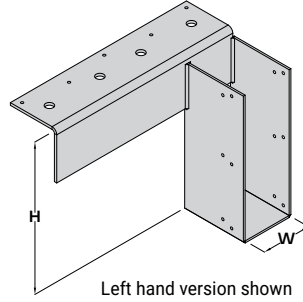


FMHIO-W-H-OFFSET DIRECTION
Example:
FMHIO-75-225-R
FMHIO-75-255-L

FMHIS – SKEW

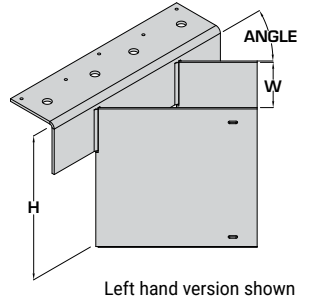

FMHIS-W-H-DIRECTION-ANGLE
Example:
FMHIS-75-225-L-45
FMHIS-100-250-R-67.5
(skews from 30-87.5° in 2.5° increments, with 5mm automatically added to ordered width to allow for tolerance)


FMHID – DROPPED

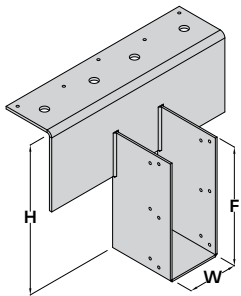

FMHID-W-H-F
Example:
FMHID-75-260-240


FMHIST – STRADDLE

FMHIST straddle hangers not suitable for use on separating walls due to fire resistance/sound transference.

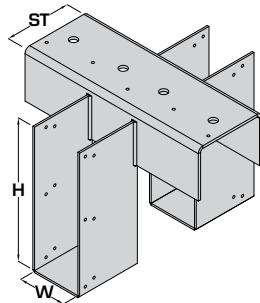


FMHIST-W-H-ST
Example:
FMHIST-75-225-100
(straddle widths will be fabricated with a tolerance +2mm)
(order hanger to suit width of block and tolerance will be added during fabrication 100, 102.5, 140mm etc)

FMHIOR – OFFSET & RETURN

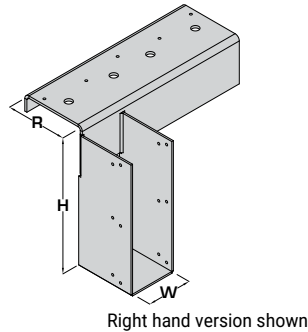


FMHIOR-W-H-OFFSET DIRECTION-R
Example:
FMHIOR-75-225-R-100
(2mm added to return for tolerance)

FMHIRS – SKEW & RETURN

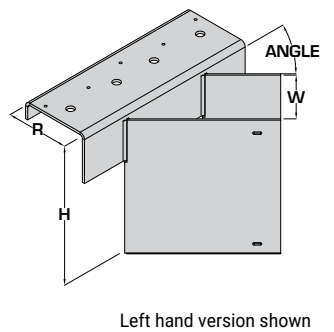

FMHIRS-W-H-DIRECTION-ANGLE-R
Example:
FMHIRS-75-225-R-45-100
FMHIRS-75-225-L-45-100
(skews from 30-87.5° in 2.5° increments, with 5mm automatically added to ordered width to allow for tolerance)

In Situ

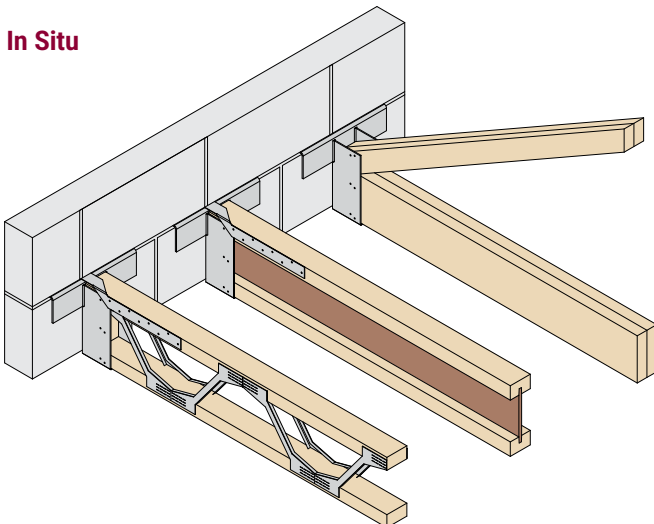

- Suitable for use with Open Web Joists, I-Joists and trusses
- Floor can be propped with acroprops and fully decked but must not be fully loaded until the masonry above has fully cured



- Where minimum of 3 courses (675mm) of masonry is required for hanger to achieve loads stated
- The masonry above must be fully cured for 28 days prior to loading the floor
- All hangers in this range do not provide restraint, therefore restraint straps may be required for joist applications (see pages 130 – 131)

FMHI

Flexible Masonry Hanger

Load Data

| Hanger Type | Masonry Above (Min 675mm) | Fixings (3.4 x 35mm) | Angle | Characteristic Capacity (kN) | | | | |
|------------------------------|---------------------------|----------------------|------------|------------------------------|---------------------------|-------|-------|-------|
| | | Incoming | | Uplift | Masonry Crushing Strength | | | |
| FMHI/R/O/D/ST ⁽¹⁾ | No | 4 | 90° | n/a | – | 20.01 | 28.31 | – |
| FMHI/R/O/D/ST ⁽¹⁾ | Yes | 4 | 90° | 2.00 | 19.83 | 24.79 | 43.00 | 43.00 |
| FMHIS/FMHIRS | Yes | 4 | 30 – 42.5° | 2.00 | 9.98 | 12.48 | 18.30 | 20.00 |
| | | | 45 – 57.5° | 2.00 | 12.48 | 15.60 | 22.90 | 25.00 |
| | | | 60 – 72.5° | 2.00 | 14.97 | 18.72 | 27.50 | 30.00 |
| | | | 75 – 87.5° | 2.00 | 17.44 | 21.80 | 32.00 | 35.00 |


(1) FMHIST characteristic capacity values are per each side of the straddle hanger

Enhanced Uplift


- Fixings into the incoming joist/truss are required to resist uplift
- Increased uplift figures can be achieved by nailing the additional triangular nail holes into the incoming member

| Hanger Depth (H) (mm) | Min Timber Depth (mm) | Fixings (3.4x35mm) | Characteristic Capacity (kN) |
|-----------------------|-----------------------|--------------------|------------------------------|
| | | Incoming | Uplift |
| 150 | 97 | 6 | 4.67 |
| 175 – 195 | 122 | | |
| 225 – 240 | 147 | | |
| 250 | 147 | | |
| 300 | 172 | | |
| 350 | 197 | | |
| 400 | 222 | | |
| 150 – 400 | FULL DEPTH | 12 | 14.72 |

- Enhanced uplift only applicable for 90° hangers over 72mm wide
- Requires minimum full storey of masonry above to achieve values

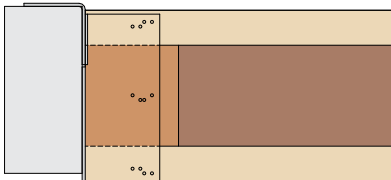


Web stiffeners required for I-Joists

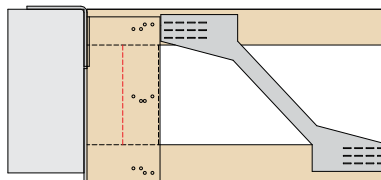

2 No end blocks required for Open Web Joists

Block must be the full width of the joist

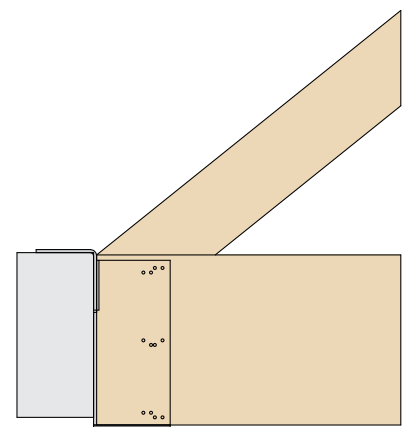


Plates omitted for clarity


Minimum bottom chord depth or vertical required for trusses

M-STD/M-RTN

Very High Load Masonry Hanger

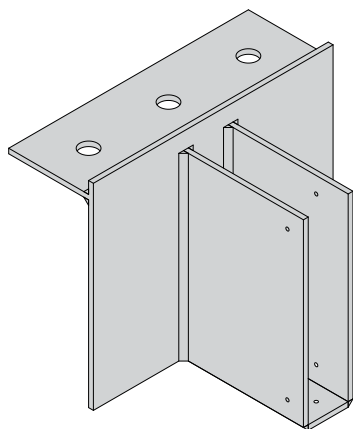

MASONRY-STD

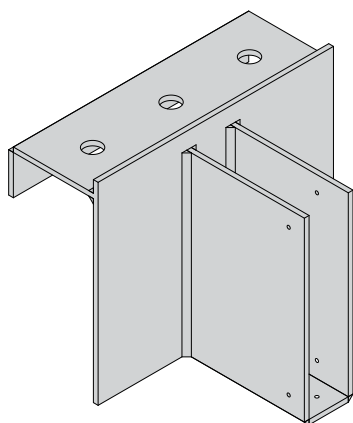

MASONRY-RTN

Available Sizes

Hanger Widths (mm): 39 – 300

Hanger Depths (mm): 150 – 400

Return Widths (mm): 100 – 250

Contact Technical Support for skewed and straddle options

Load Data

| Hanger Type | Masonry Above (Min 675mm) | Fixings (3.4 x 35mm) | Characteristic Capacity (kN) | | | | |
|-----------------|------------------------------|-------------------------|------------------------------|---------------------------|----------------------|----------------------|--------------------|
| | | | Uplift** | Masonry Crushing Strength | | | |
| | | Incoming | | 2.8N/mm ² | 3.5N/mm ² | 7.0N/mm ² | Padstone (Min C30) |
| Masonry-Std-6mm | Yes | 6 | 2.00 | 30.00 | 38.00 | 50.00 | 50.00 |
| Masonry-Rtn-6mm | Yes | 6 | 2.00 | 30.00 | 38.00 | 50.00 | 70.00 |
| Masonry-Std-8mm | Yes | 6 | 2.00 | 40.00 | 42.00 | 50.00 | 50.00 |
| Masonry-Rtn-8mm | Yes | 6 | 2.00 | 40.00 | 42.00 | 60.00 | 90.00 |
| Masonry-Std-6mm | No | 6 | 0.00 | 30.00 | 38.00 | 50.00 | 50.00 |
| Masonry-Rtn-6mm | No | 6 | 0.00 | 30.00 | 38.00 | 50.00 | 70.00 |
| Masonry-Std-8mm | No | 6 | 0.00 | 40.00 | 42.00 | 50.00 | 50.00 |
| Masonry-Rtn-8mm | No | 6 | 0.00 | 40.00 | 42.00 | 60.00 | 90.00 |

The Masonry Standard and Masonry Return hangers are used to support joists and trusses from masonry walls in very high load situations.

Features & Benefits

- Partial penetration butt welds allow for greater performance over FMHI hanger
- Available in 2 thickness options to accommodate higher loads
- Return option available to keep hanger tight to masonry wall

Material Specification

- 6mm & 8mm mild steel with zinc phosphate undercoat and an organic bituminous top coat to BS EN845-1:2013+A1:2016

Fixings


Fixings required into incoming member only. No fixings required into masonry.

| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi

Dimensions (mm)

MASONRY-STD

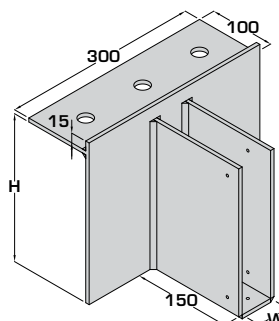


M-STD-THICKNESS-W-H

Example:

M-STD-6MM-100-225

MASONRY-RTN

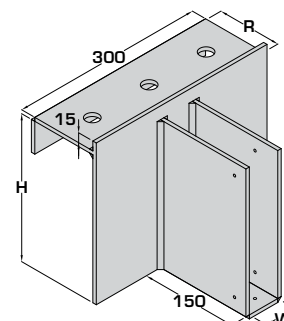

M-RTN-THICKNESS-W-H-R

Example:

M-RTN-8MM-100-225-100

VSM

Variable Skew Masonry Hanger



The VSM hanger is used to support joists and trusses up to 97mm wide from masonry walls in skewed applications between 30 – 90°.

Features & Benefits

- Unique hanger design provides a variable skew angle between 30 – 90°
- No need to mitre cut joists
- Angle scale on base to ease adjustment

Material Specification


- Galvanised mild steel – Z600

Fixings

Fixings required into incoming member only. No fixings required into masonry.

| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi

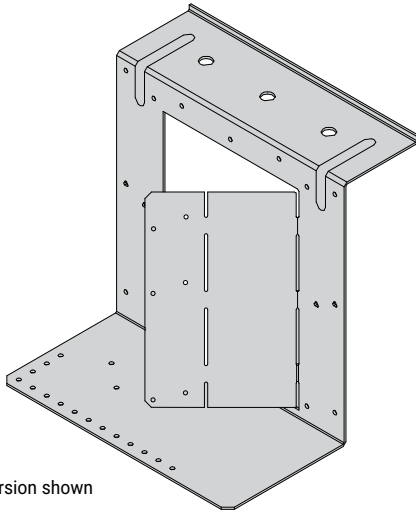


Right Hand version shown


Available Sizes

| Min Joist Width (mm) | Max Joist Width (mm) | Handing | Hanger Depth (H) (mm) | |
|----------------------|----------------------|----------------------------|-----------------------|----------------------------|
| | | | 225 | >300 |
| 38 | 97 | Right | VSM-225-R | See FMHIS on pages 18 – 20 |
| 38 | 97 | Left | VSM-225-L | |
| >97 | | See FMHIS on pages 18 – 20 | | |


Left Hand

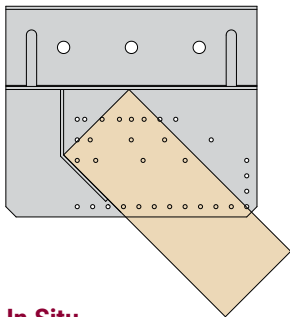

Right Hand

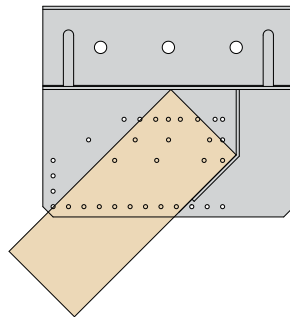

Dimensions (mm)

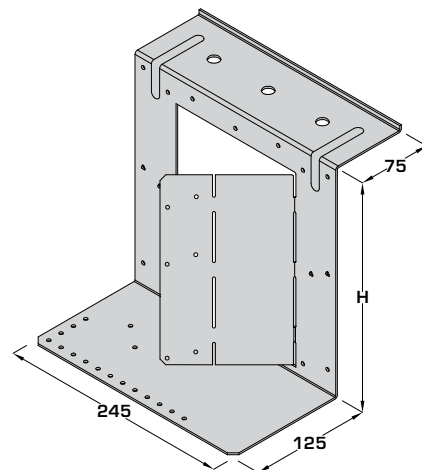


In Situ

- Suitable for use with Open Web Joists, I-Joists and trusses.
- Floor can be propped with acroprops and fully decked but must not be fully loaded until the masonry above has fully cured.




- A minimum of 3 courses (675mm) of masonry above is required for hanger to achieve loads stated.
- The masonry above must be fully cured for 28 days prior to loading the floor.

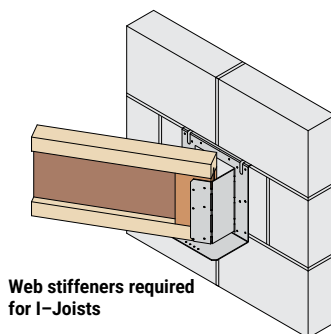


Web stiffeners required for I-Joists

Plates and additional block work have been omitted for clarity

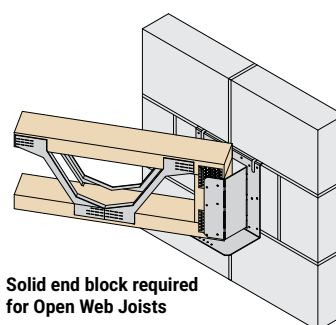

Solid end block required for Open Web Joists

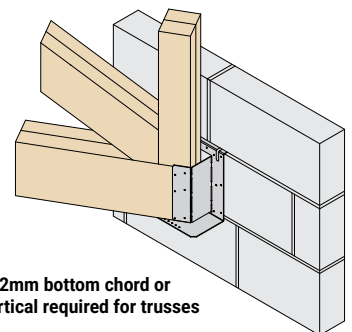

222mm bottom chord or vertical required for trusses

VSM

Load Data


| Hanger Depth (mm) | Fixings (3.4 x 35mm) | Characteristic Capacity (kN) | | | |
|-------------------|-------------------------|------------------------------|---------------------------|----------------------|----------------------|
| | | Uplift | Masonry Crushing Strength | | |
| | Incoming | | 2.8N/mm ² | 3.5N/mm ² | 7.0N/mm ² |
| 225 | 6 | 2.40 | 8.32 | 10.40 | 10.40 |

Installation Instructions


Stage 1

Adjust side plate to approximate angle between 30° and 90° using scale on base of hanger, bending only once. Refer to the angle table below to determine if one or two bends are required.

Single Bend





Double Bend

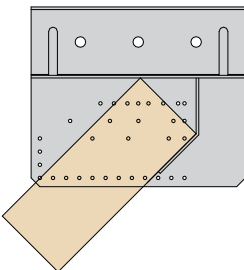

| Joist Width (mm) | Double bend | Single Bend |
|------------------|-------------|-------------|
| 35 | n/a | 30-90° |
| 38 | n/a | 30-90° |
| 44 | n/a | 30-90° |
| 45 | n/a | 30-90° |
| 47 | n/a | 30-90° |
| 51 | 30-32° | >32-90° |
| 53 | 30-32° | >32-90° |
| 58 | 30-34° | >34-90° |
| 59 | 30-34° | >34-90° |
| 60 | 30-34° | >35-90° |
| 63 | 30-37° | >37-90° |
| 70 | 30-39° | >39-90° |
| 72 | 30-40° | >40-90° |
| 76 | 30-42° | >42-90° |
| 88 | 30-46° | >46-90° |
| 89 | 30-46° | >46-90° |
| 90 | 30-46° | >46-90° |
| 94 | 30-48° | >48-90° |
| 97 | 30-49° | >49-90° |

Stage 3


Locate incoming member and adjust side plate to correct angle, ensuring maximum gap between incoming joist and back plate is no greater than 3mm.

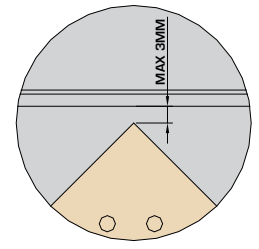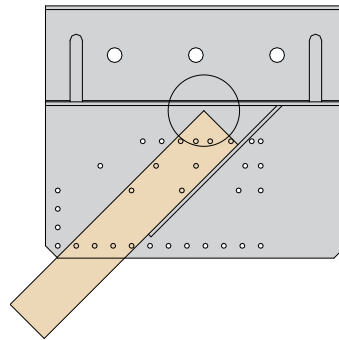

Max – 3mm gap at any given time



Stage 4

Fix to incoming member using 6No 3.4 x 35mm square twist nails. Where incoming member is an I-joist, web stiffeners must be fixed as per I-joist manufacturer's guidelines.


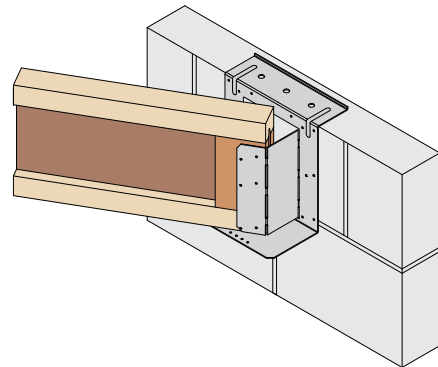


Stage 2

Position VSM flush against masonry.

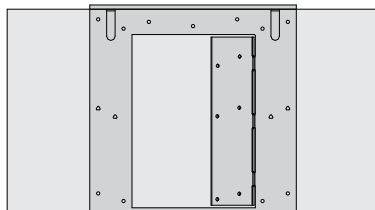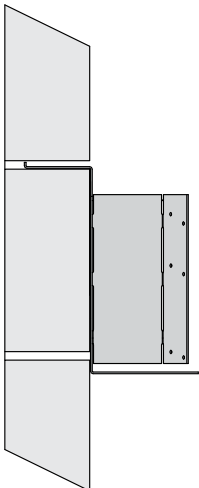

Ensure that 1No inner nail hole (indicated in red) and 1No outer nail hole (indicated in red) are filled on the underside with a 3.4 x 35mm square twist nail.



RA Range

Restraint Angle Range

UK
CA

The RA hanger range comprises of 3 hangers to suit all applications: the RA, HRAD and RADS. This is a timber to masonry hanger range designed for use with I-Joists, Open Web Joists, LVL & Glulam. The hangers provide lateral restraint⁽¹⁾ and require no masonry above to perform to their full capacity.

Features & Benefits

- Provides lateral restraint ⁽¹⁾ equivalent to restraint straps at 2m centres. Additional straps required for buildings over 2 storeys or openings greater than 600mm
- No coursing option required as RA range supports joists on top of previous block course, allowing joist to be built in at one end without adjustment
- Supporting block work only needs to cure for 3 days instead of the standard 28 days for traditional masonry hangers, speeding up the build process

Material Specification


- Galvanised mild steel – Z600

Fixings

Fixings required into incoming member only. No fixings required into masonry.


| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi

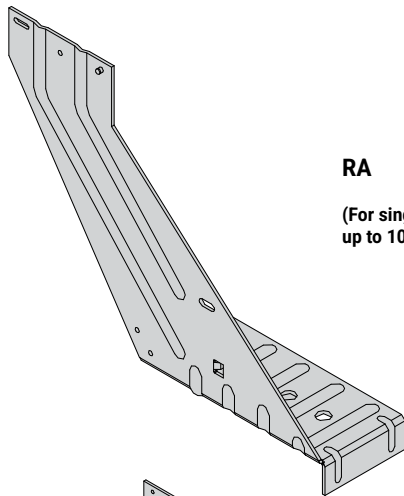


RA

(For single joists
up to 100mm wide)

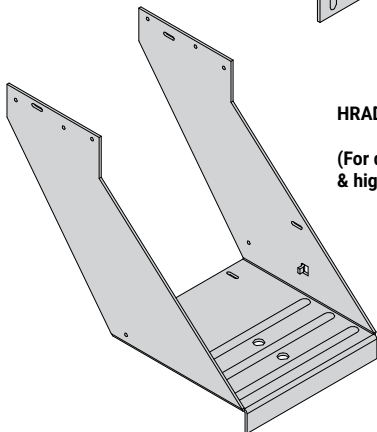

HRAD


(For double joists
& high loads)

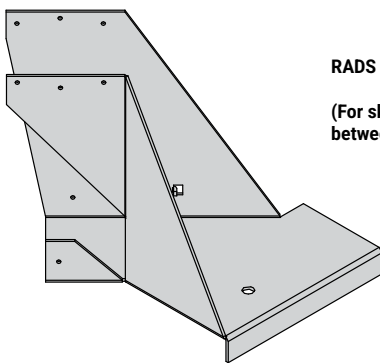

RADS


(For skewed applications
between 30 – 87.5°)

Height Suitability**

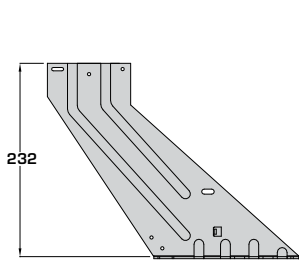


RA-240

(To suit 235 – 245 deep I-Joists)
(To suit 253 – 254 deep Open Web
Joists)

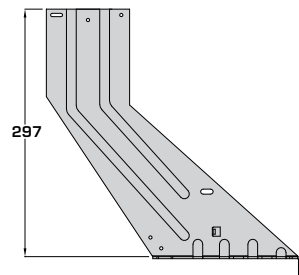


RA-300

(To suit 300 – 302 deep I-Joists)
(To suit 304 deep Open Web Joists)

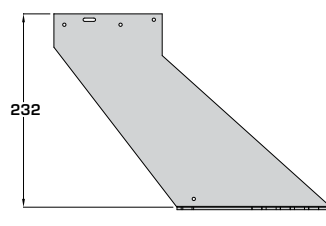

HRAD-240

(To suit 235–245 deep I-Joists)
(To suit 253–254 deep Open Web Joists)

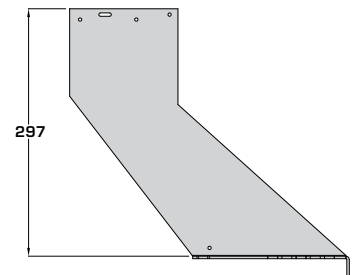

HRAD-300

(To suit 300–302 deep I-Joists)
(To suit 304 deep Open Web Joists)

**Also applies to RADS hangers

RA Range

Available Sizes (RA)

| Hanger Width (W) (mm) | Hanger Depth (H) (mm) | |
|--|--------------------------|--------|
| | 240 | 300 |
| One size (to suit joist widths 38 – 97mm wide) | RA-240 | RA-300 |


RA-H

Example: RA-240

(TO SUIT 100MM BLOCKWORK ONLY)

Dimensions (mm)


RA HANGER

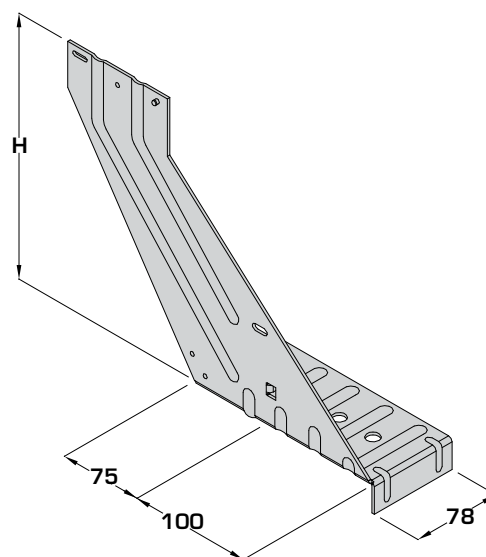

Available Sizes (HRAD)

| Hanger Width (W) (mm) | Hanger Depth (H) (mm) | |
|--------------------------|--------------------------|--------------|
| | 240 | 300 |
| 92 | HRAD-240-92 | HRAD-300-92 |
| 100 | HRAD-240-100 | HRAD-300-100 |
| 122 | HRAD-240-122 | – |
| 125 | HRAD-240-125 | – |
| 144 | – | HRAD-300-144 |
| 150 | HRAD-240-150 | – |
| 198 | HRAD-240-198 | HRAD-300-198 |
| 250 | HRAD-240-250 | – |
| 300 | HRAD-240-300 | – |

HRAD HANGER

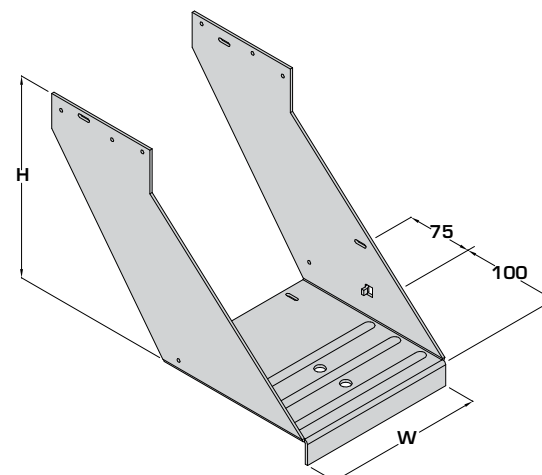

HRAD-H-W

Example: HRAD-240-92

(TO SUIT 100MM BLOCKWORK ONLY)

Available Sizes (RADS)

For skewed connections the RADS is made to order upon request.

TO ORDER:


RAD-S-ANGLE-ORIENTATION-DEPTH-WIDTH

Example: RAD-S-45-L-240-46 (to suit 100mm block work)

Available in angles between 30 – 87.5°.

Increments of 2.5° (30, 32.5, 35, 37.5...)


RADS HANGER

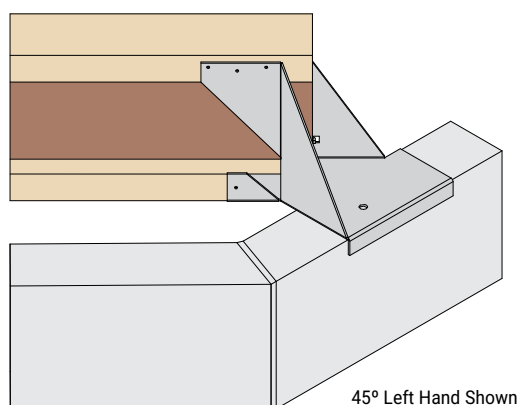

RA Range


Restraint Angle Range

Load Data

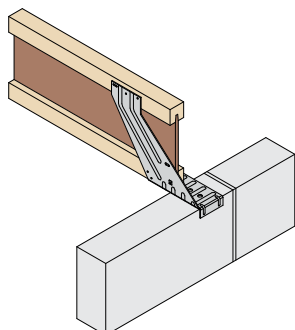


| Hanger Type | Fixings (3.4 x 35mm) | Characteristic Capacity (kN) | | | |
|-------------|-------------------------|------------------------------|---------------------------|----------------------|----------------------|
| | | Uplift* | Masonry Crushing Strength | | |
| | | | 2.8N/mm ² | 3.5N/mm ² | 7.0N/mm ² |
| RA | 6 | 7.11 | 9.10 | 11.38 | 11.38 |
| HRAD | 12 | 7.11 | 22.51 | 28.14 | 28.14 |
| RADS | 9 | 7.11 | 11.48 | 14.35 | 14.35 |

*Uplift only applicable when hangers are fully built in with a minimum of 675mm of fully cured masonry above the base plate.

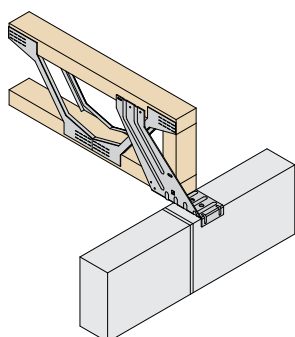

| Hanger Type | Fixings (3.4 x 35mm) | Uplift* | Characteristic Capacity (kN) | | |
|-------------|-------------------------|---------|------------------------------|----------------------|----------------------|
| | | | Masonry Crushing Strength | | |
| | | | 2.8N/mm ² | 3.5N/mm ² | 7.0N/mm ² |
| RA | 6 | 7.11 | 9.10 | 11.38 | 11.38 |
| HRAD | 12 | 7.11 | 22.51 | 28.14 | 28.14 |
| RADS | 9 | 7.11 | 11.48 | 14.35 | 14.35 |

*Uplift only applicable when hangers are fully built in with a minimum of 675mm of fully cured masonry above the base plate.


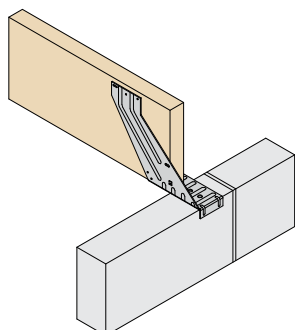


| Hanger Type | Fixings (3.4 x 35mm) | Uplift* | Characteristic Capacity (kN) | | |
|-------------|-------------------------|---------|------------------------------|----------------------|----------------------|
| | | | Masonry Crushing Strength | | |
| | | | 2.8N/mm ² | 3.5N/mm ² | 7.0N/mm ² |
| RA | 6 | 7.11 | 11.49 | 14.37 | 14.37 |
| HRAD | 12 | 7.11 | 27.34 | 34.18 | 34.18 |
| RADS | 9 | 7.11 | 11.48 | 14.35 | 14.35 |

*Uplift only applicable when hangers are fully built in with a minimum of 675mm of fully cured masonry above the base plate.



Incorrect Installation

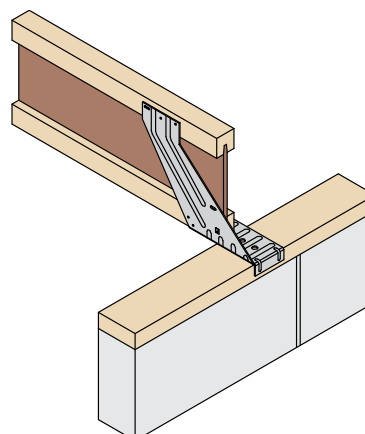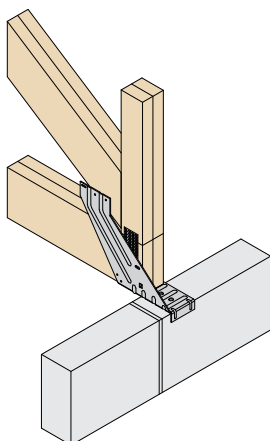


Do not use the RA range with trussed rafters.

Do not install the RA range onto a timber wall plate.

RA Range


Installation Instructions

Stage 1 – INSTALLATION

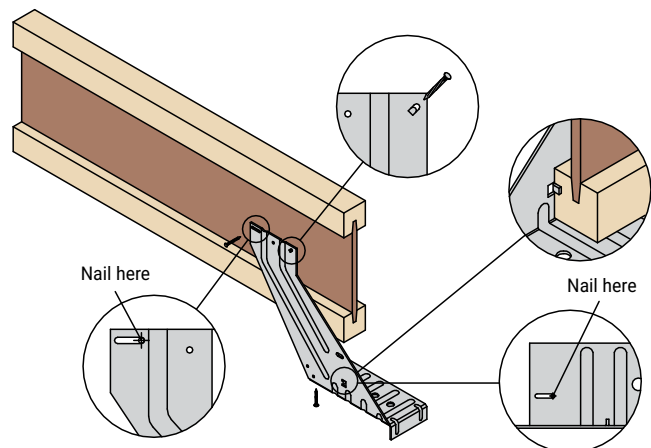

- Ensure joists just fit between the walls
- If using I-joists and they are too long, trim to fit
- Position joist against location tab
- Pre-fix RA to each end of pre-cut joist, nailing through slotted holes in base plate and side flange only, as shown
- Slide to opposite side of slots to provide full 6mm adjustment on wall head
- Always pre-fix hangers at ground level or on scaffolding

Stage 2 – ADJUSTMENT

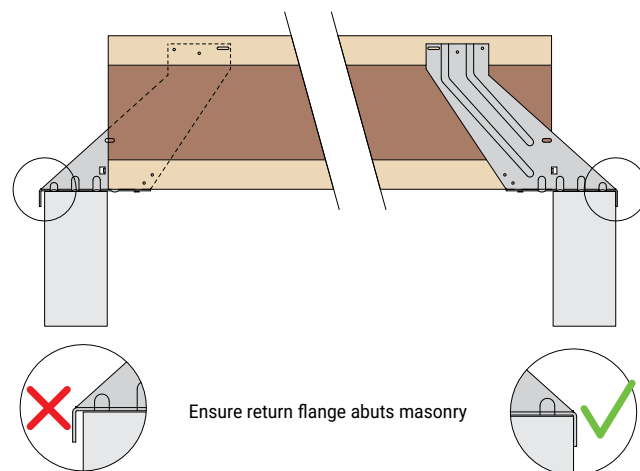


- Locate assembled joist on wall head allowing equal adjustment at both ends
- Adjust each end by tapping with a hammer until return flange is correctly positioned tight against blockwork
- This stage provides a maximum horizontal adjustment of 12mm and suits blockwork built to BS5606:1990 Accuracy in Building



Ensure return flange abuts masonry

Stage 3 – FINAL ADJUSTMENT

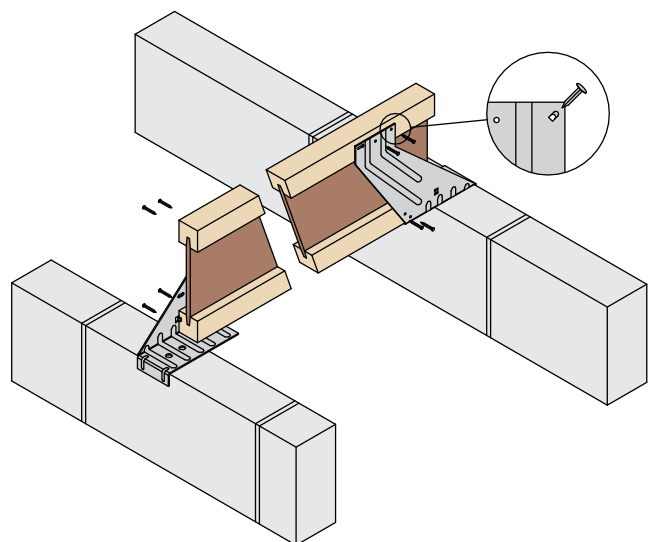


- Fully nail using 3.4 x 35mm square twist nails



DO NOT apply any load to joist prior to RA being fully nailed

DECKING INSTALLATION FOR FLOORS

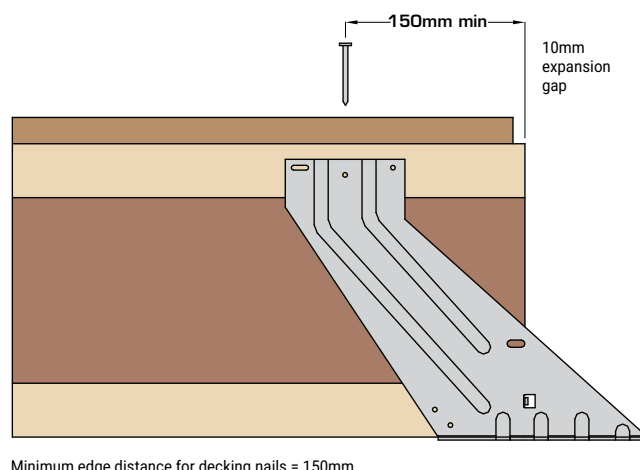


Minimum edge distance for decking nails = 150mm


HV-GR

Hi-Vis Gripper


Patent Number GB2511155

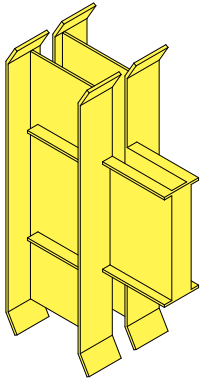

HV-GR-1
38 – 53MM WIDE

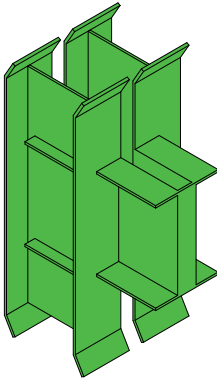

HV-GR-2
58 – 72MM WIDE

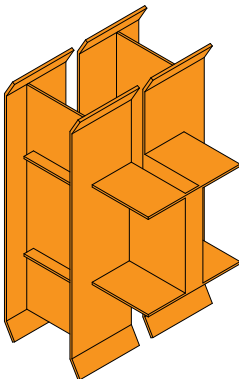

HV-GR-3
89 – 97MM WIDE

The Hi-Vis Gripper is a build-in detail for I-joists into masonry reducing air leakage at the joist end. The Hi-Vis Gripper can be used on both external and party walls.

Features & Benefits

- Range of striking colours and unique design enables high visibility for post installation inspection
- Bend and push fit with no mortar to front face speeds up install
- Easy to install – no nailing required or need to trim joists to fit, saving time on site
- Mastic not required to seal I-Joist perimeter, reducing site costs
- Suitable for joists with either 90 or 100mm bearing without protruding into cavity
- A major contribution to compliance with air leakage

Build-in Detail Advantages

(Requiring external mortar sealing only)

- In line with existing building practice
- Easy access
- Quick and effective
- Visual quality check from outside

Approvals

- Meets NHBC technical requirements
- Part E: Compliant with the requirements of Appendix A of the Robust Details Part E Handbook
- Assessed to BS ISO-TR12470:1998 for 60 minute fire requirements

Material Specification

High density Polyethylene



Additional parallel and perpendicular restraint may be required. Please refer to pages 130 – 131 for further guidance on built in restraint.

Available Sizes

| Joist Manufacturer | Flange Depth (mm) | Joist Depth (mm) | Joist Width (mm) | | |
|------------------------------|-------------------|------------------|--------------------|--------------------|--------------------|
| | | | 38 – 53 | 58 – 72 | 89 – 97 |
| James Jones (JJI) | 45 | 220 | HV-GR-220-1 | HV-GR-220-2 | HV-GR-220-3 |
| | | 245 | HV-GR-240-1 | HV-GR-240-2 | HV-GR-240-3 |
| | | 300 | HV-GR-300-1 | HV-GR-300-2 | HV-GR-300-3 |
| Metsawood (FJI) | 36 & 39 | 220 | HV-GR-240-1 (36mm) | HV-GR-240-2 (36mm) | HV-GR-220-3 (39mm) |
| | | 240 | HV-GR-240-1 (36mm) | HV-GR-240-2 (36mm) | HV-GR-240-3 (39mm) |
| | | 300 | HV-GR-300-1 (36mm) | HV-GR-300-2 (36mm) | HV-GR-300-3 (39mm) |
| Steico (SJI) | 39 | 220 | HV-GR-220-1 | HV-GR-220-2 | HV-GR-220-3 |
| | | 240 | HV-GR-240-1 | HV-GR-240-2 | HV-GR-240-3 |
| | | 300 | HV-GR-300-1 | HV-GR-300-2 | HV-GR-300-3 |
| Masonite (H, HB, HI, HL, HM) | 47 | 220 | HV-GR-220-1 | HV-GR-220-2 | HV-GR-220-3 |
| | | 240 | HV-GR-240-1 | HV-GR-240-2 | HV-GR-240-3 |
| | | 300 | HV-GR-300-1 | HV-GR-300-2 | HV-GR-300-3 |


HV-GR

Hi-Vis Gripper

Patent Number GB2511155

External Wall Application


Install the I-Joists onto the masonry at required centres ensuring that they each have a minimum bearing onto the masonry of 90mm.

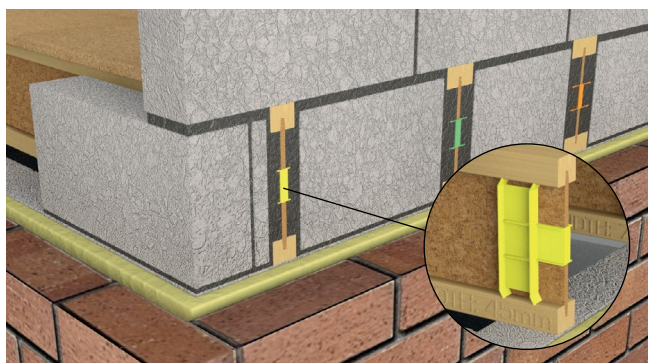

Mortar cavity side to achieve air tightness performance.


Party Wall Application

Install the I-Joists onto the masonry at required centres ensuring that they each have a minimum bearing onto the masonry of 90mm.

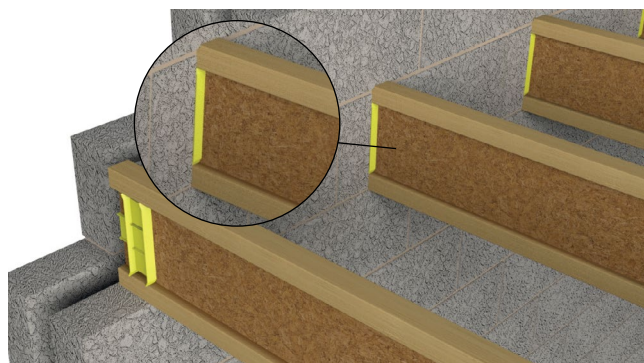

Mortar cavity side to achieve 60 minute Fire Rating and air tightness performance.


Single Ply

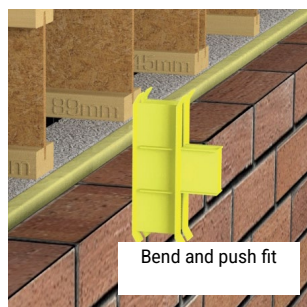


Place the Hi-Vis Gripper onto one end of the I-Joist to be built into the masonry. Push fit until it is fully engaged. Ensure it tightly abuts the I-Joist web and that both ends of the Hi-Vis Gripper tightly abut the I-Joist flanges.



Double Ply

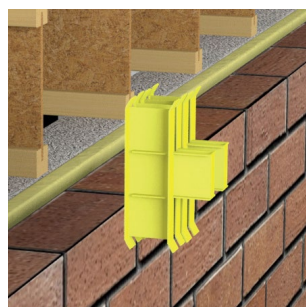

Second Hi-Vis Gripper abuts first to provide an air tight seal.

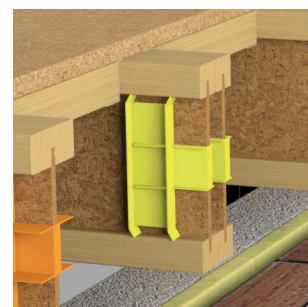


Installation of the Hi-Vis Gripper is now complete.



Double I-Joists must be securely joined with I-Clips.


Installation Instructions

Stage 1

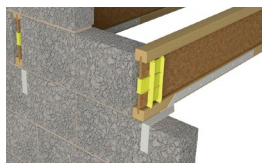


Install joists and deck as per manufacturer's instructions. Select the correct Hi-Vis Gripper to suit joist width, fold on its easy fold hinges and push onto the end of the joist, no additional fixing required.

Stage 2

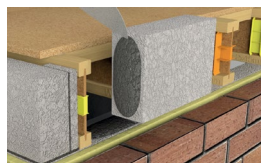


Lay mortar bed between joists, add mortar to perp end of block. Install block between joists tight to face of Hi-Vis Gripper.

Stage 3

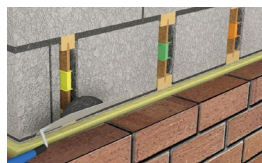

Add mortar to void created between block, joist and Hi-Vis Gripper and flush up.

Stage 4

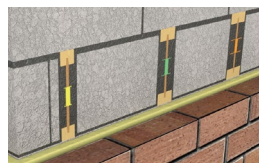


Ends of joist can be inspected to ensure correct installation before external brickwork built up.

Stage 5




No mortar or mastic required to internal face. Hi-Vis Grippers visible for post installation inspection prior to plasterboard being installed.


Timber Frame Overview




ST-PFS
Page 31




ST-PFS-M
Page 31



SP-138
Page 32




SP-90
Page 32

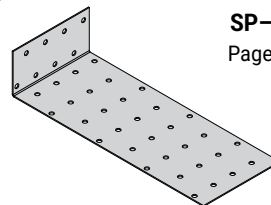


SP-240
Page 32

TIMBER FRAME HOLDING DOWN STRAPS


SOLE PLATE ANCHORS

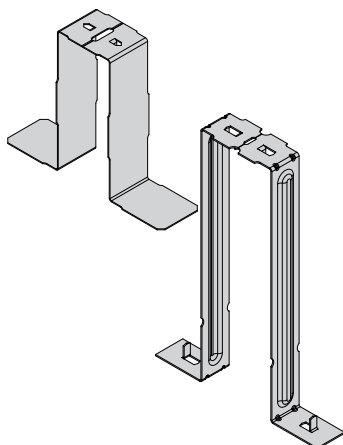


IR-CLIP
Page 33

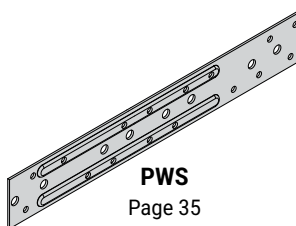

PWS
Page 35

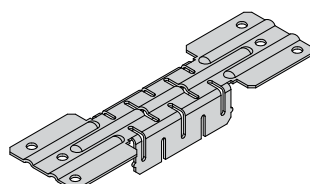

AWS
Page 34




RD-CDCR
Page 38

INSULATING RETAINING CLIPS

PARTY WALL STRAPS


DISPROPORTIONATE COLLAPSE CONNECTIONS




UZ CLIP
Page 48




PSTS
Page 36




HRS
Page 37

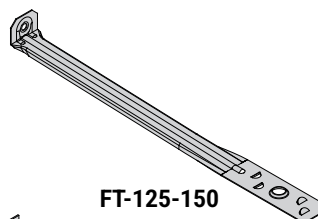

FT-125-150
Page 44 – 45



FT
Page 40 – 43

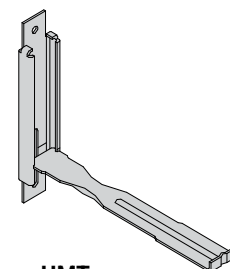

HMT
Page 46 – 47

PANEL CONSTRUCTION

TIMBER FRAME WALL TIES

ST-PFS/ST-PFS-M

Timber Frame Holding Down Strap



The ST-PFS and ST-PFS-M stainless steel straps are an engineered solution to restrain timber structures against uplift when using either timber joists, engineered joists or concrete ground floors.

Features & Benefits

- Unique design allows one part to accommodate cavities between 50 – 100mm wide
- Provides unparalleled performance in restraint against uplift to timber frame structures
- Centrally positioned holes minimising any nail slippage or timber splitting

Material Specification

- Austenitic stainless steel


Approvals

- Meets NHBC & Homebond technical requirements


Fixings

3.35 x 50mm Annular Ring Shank Nails

| Code | Box Qty |
|-------------------------|---------|
| ST-PFS-FIXING-PACK | 150 |
| ST-ST-WALLTIE-NAILS-250 | 250 |

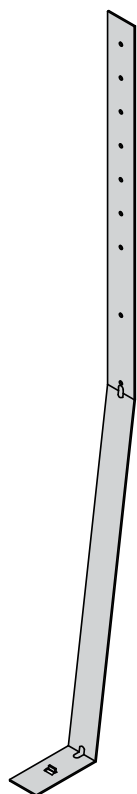

ST-PFS-50-100


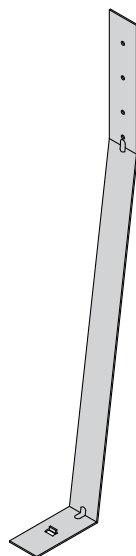


ST-PFS-50-100-M


100No fixings required for ST-PFS-M bundle

150No fixings required for ST-PFS bundle


In Situ

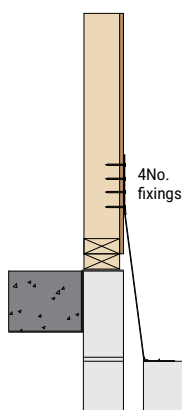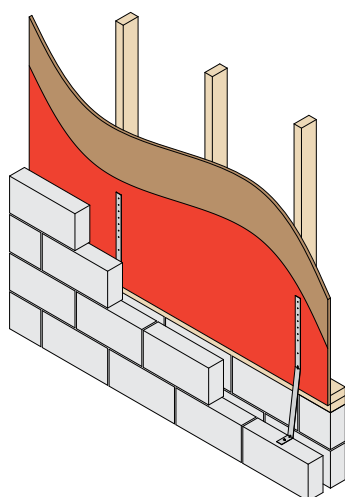

Typical Concrete
Ground Floor
ST-PFS-50-100-M

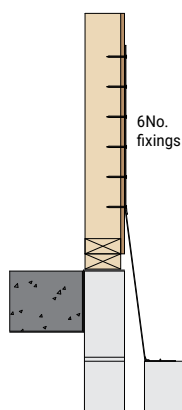


Typical Concrete
Ground Floor
ST-PFS-50-100

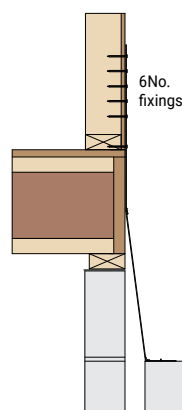

Typical Suspended
Ground Floor
ST-PFS-50-100

Dimensions (mm)

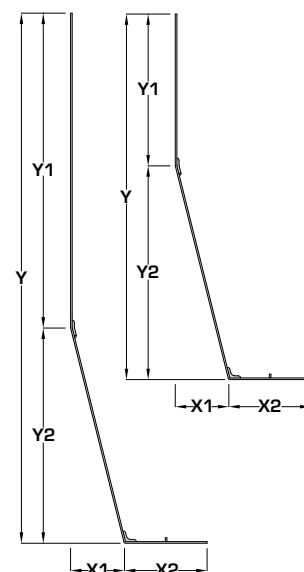


Load Data

| Product Code | Min Cavity Width (mm) | Max Cavity Width (mm) | Fixings (3.35 x 50mm) | Dimensions (mm) | | | | | Characteristic Capacity (kN) |
|-----------------|-----------------------|-----------------------|-----------------------|-----------------|----|-----------|-----|-----------|------------------------------|
| | | | | X1 | X2 | Y | Y1 | Y2 | |
| ST-PFS-50-100 | 50 | 100 | 6 | 50 – 100 | 75 | 722 – 711 | 346 | 376 – 365 | 6.90 |
| ST-PFS-50-100-M | 50 | 100 | 4 | 50 – 100 | 75 | 506 – 516 | 140 | 376 – 365 | 5.40 |

SP

Sole Plate Anchor

The SP anchor range comprises of 3 anchors to suit various applications. The anchors are designed to locate and anchor timber sole plates.

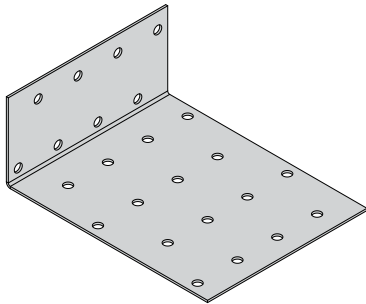

SP-138

Features & Benefits


- Multiple nail holes offering various nailing options
- Provides secure location without puncturing the DPC

Material Specification

- Galvanised mild steel – Z275


Fixings

Fixings to be specified by Building Designer

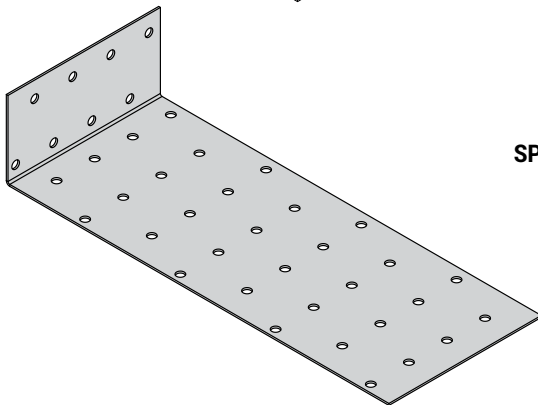


SP-240

In Situ

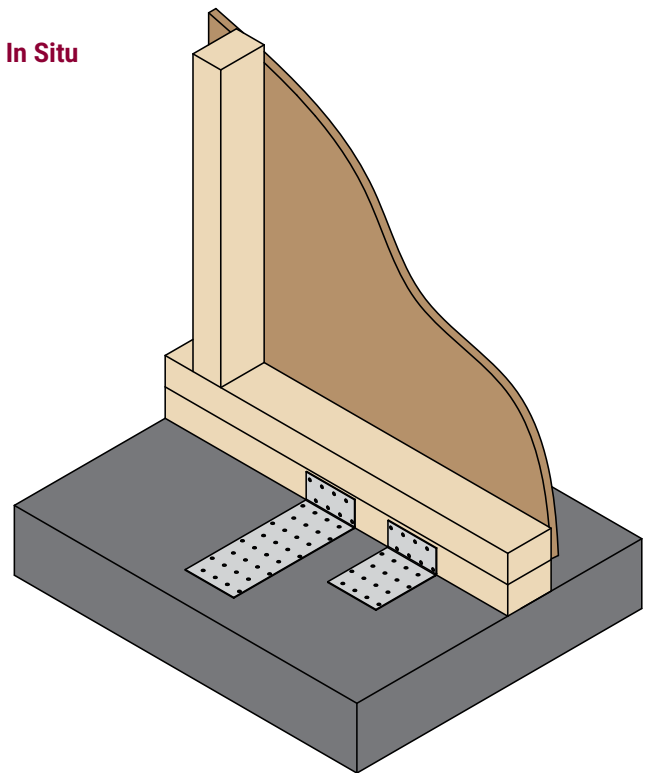


Dimensions (mm)

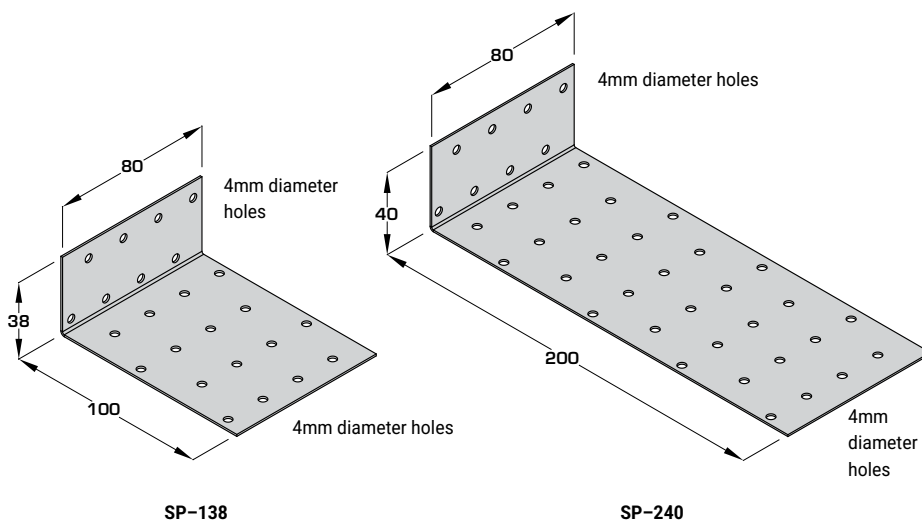

IR-CLIP

Insulation Retaining Clip

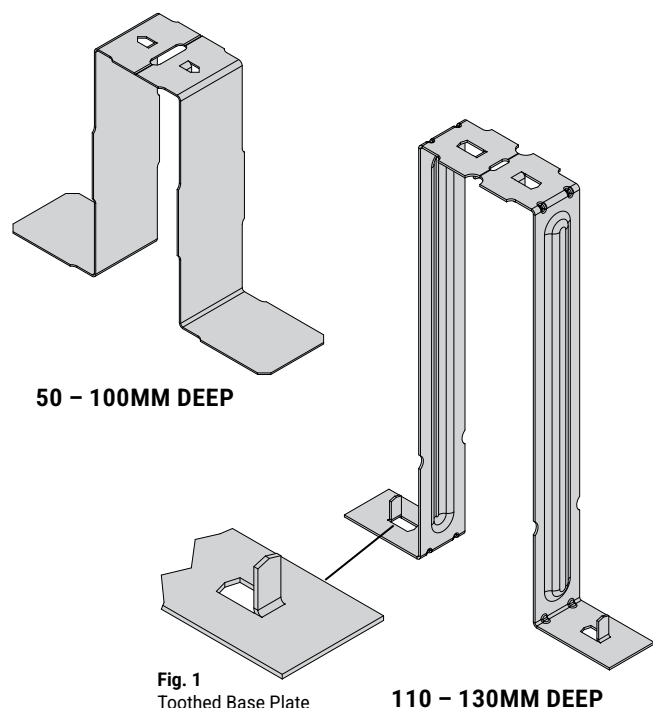


Available Sizes

| Product Code | Height (H) (mm) |
|--------------|-----------------|
| IR-Clip-70 | 70 |
| IR-Clip-100 | 100 |
| IR-Clip-110 | 110 |
| IR-Clip-120 | 120 |
| IR-Clip-130 | 130 |

In Situ

Quantity required to be confirmed by Building Designer / Manufacturer (Non Structural item)

Single Stud Application:

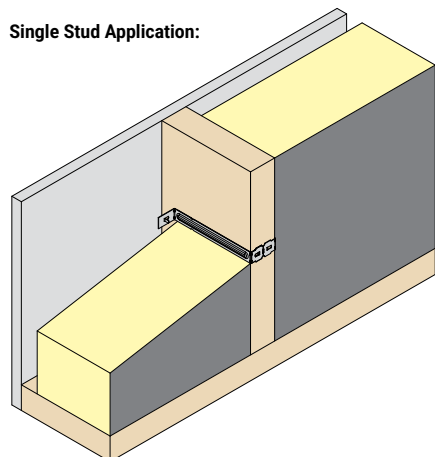

The IR-Clip allows for the use of high performance rigid insulation within a timber frame panel, whilst maintaining a service gap.


Features & Benefits

- Snap-off detail splits the IR-Clip into two halves, for use on multiple studs or single use applications i.e panel ends
- Speeds up panel manufacturing time, as insulation and OSB can be fitted from the same side
- Toothed profile to allow easy installation with no nails or screws required
- Guaranteed service void (2No IR-Clips can be used to create two void areas within a panel)
- Can be used in accordance with the Structural Timber Association fire safety in use Volume 1 - Pattern Book systems (Insulation - "factory fitted using metal clips to timber manufacturer's details")


Material Specification

- Galvanised mild steel – Z275

Dimensions (mm)

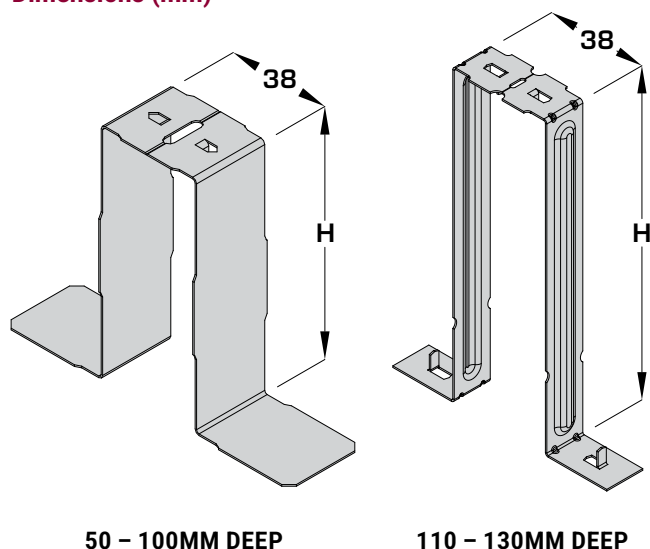


Double Stud Application:

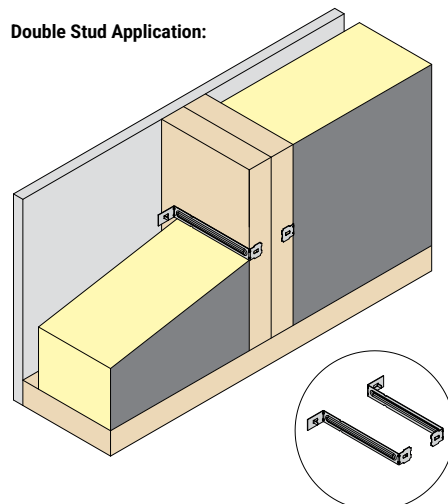


AWS

Acoustic Wall Strap

GB Patent: 2448765

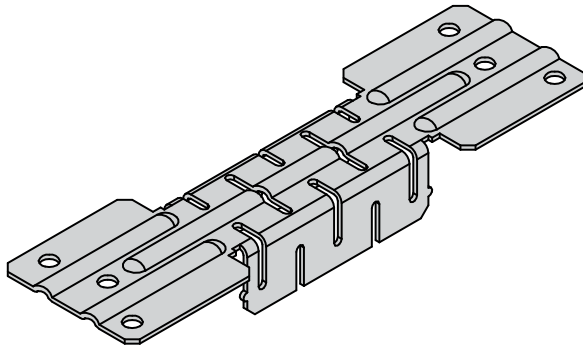


In Situ

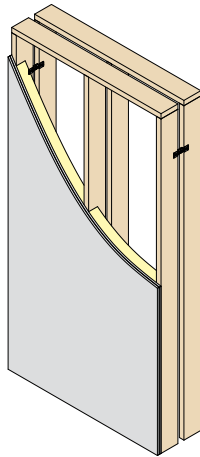

E-WT-1
(timber frame cavity wall
without sheathing)

AWS fixed to face of panel.
Straps at 1200mm (min)
centres horizontally, one
row of ties per storey
height vertically.
To be positioned near
top of panel.

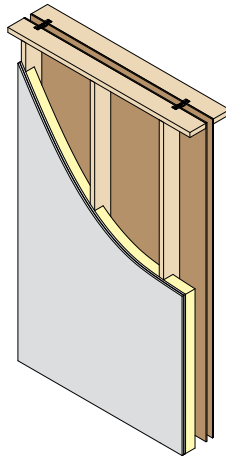

E-WT-2
(timber frame cavity wall
with sheathing)

AWS fixed to top rail.
Straps at 1200mm (min)
centres horizontally, one
row of ties per storey
height vertically.

The AWS wall straps are used to connect separating walls in attached dwellings.

Features & Benefits

- Special design allows for greater strength and acoustic properties over standard straps
- Ensures correct cavity width, eliminating site errors
- Increased compression and tension strength enabling greater transfer of wind loadings
- Unique slotted profile reduces sound transmission

Material Specification

- Galvanised mild steel – Z275

Approvals


- Compliant with Part E (England & Wales) – Part E & Approved Document E
- Compliant with Part E (Ireland)
- Compliant with E-WT-1 & E-WT-2 (Robust Details) for separating wall straps
- Compliant with Building Standards Scotland – Section 5 (Noise)
- Compliant with Regulation G2 Northern Ireland – DOE Technical Booklet G

Fixings

| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi

Dimensions (mm)

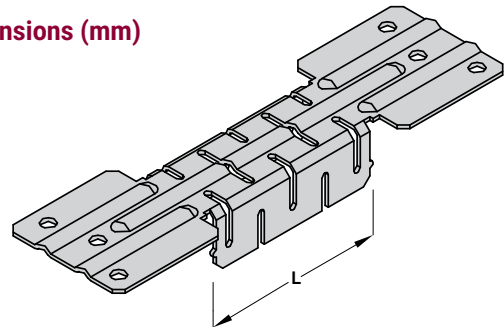

Load Data


| Product Code | L (mm) | Cavity Width (mm) | Fixings (3.4 x 35mm) | Safe Working Load (kN) Compression & Tension Short Term | Characteristic Capacity (kN) Compression & Tension** |
|--------------|--------|-------------------|----------------------|--|---|
| AWS-50 | 50 | 50 | 6 | 1.70 | 3.20 |
| AWS-65 | 65 | 65 | 6 | 1.70 | 3.20 |

**Values obtained from tests carried out by ITW Construction Products Offsite and calculated in accordance with ETAG 015.


PWS

Party Wall Strap


PWS-200

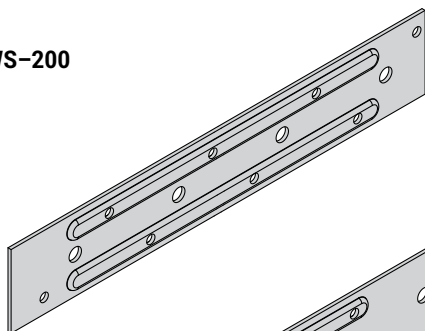

PWS-240

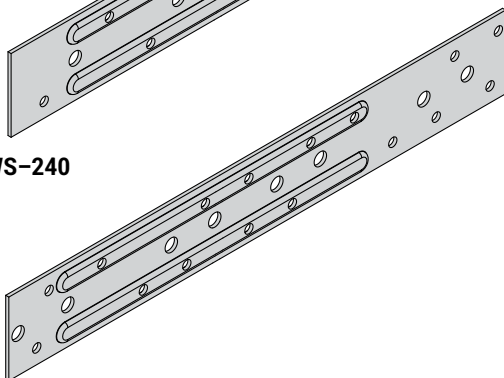

In Situ

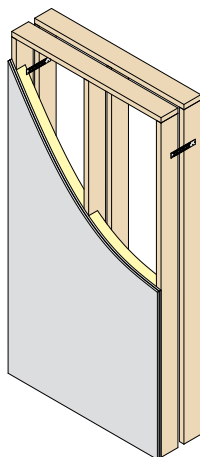


E-WT-1
(timber frame cavity wall
without sheathing)

PWS fixed to face of panel.

Straps at 1200mm (min)
centres horizontally, one
row of ties per storey
height vertically.

To be positioned near
top of panel.

Nails to have minimum
20mm edge distance.

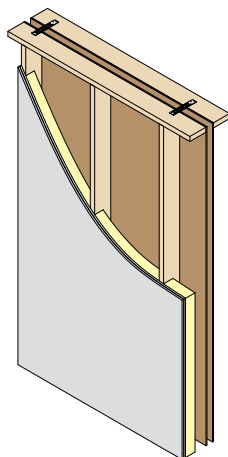

E-WT-2
(timber frame cavity wall
with sheathing)

PWS fixed to top rail.

Straps at 1200mm (min)
centres horizontally, one
row of ties per storey
height vertically.

When levels change straps
should be fixed to the face
of the panel.

Nails to have minimum
20mm edge distance.

Load Data

| Product Code | L (mm) | Cavity Width (mm) | Fixings (3.4 x 35mm) | Safe Working Load (kN) Compression & Tension Short Term | Characteristic Capacity (kN) Compression & Tension |
|--------------|--------|-------------------|----------------------|--|---|
| PWS-200 | 200 | 50 – 75 | 6 | 1.70 | 2.70 |
| PWS-240 | 240 | 76 – 100 | 6 | 1.20 | 1.70 |



The PWS wall straps are used to connect separating walls in attached dwellings.

Features & Benefits

- 2 parts can accommodate cavity widths from 50 – 100mm

Material Specification

- Galvanised mild steel – Z275

Approvals


- Compliant with Part E (England & Wales) – Part E & Approved Document E
- Compliant with Part E (Ireland)
- Compliant with E-WT-1 & E-WT-2 (Robust Details) for separating wall straps
- Compliant with Building Standards Scotland – Section 5 (Noise)
- Compliant with Regulation G2 Northern Ireland – DOE Technical Booklet G

Fixings

| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi

Dimensions (mm)

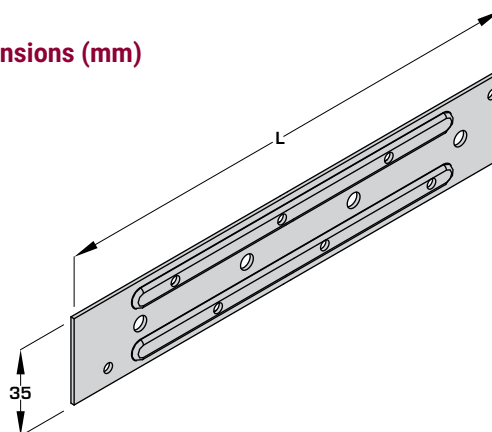

PSTS

Open Panel Connection (8mm)



CE UK
CA
EN 14592

The Paslode Structural Screws are specifically designed for the UK Construction market. The 8mm diameter screws can quickly and easily join timber frame panels together.


Features & Benefits

- Draws panels tightly together to maximise strength and minimise air leakage
- Higher lateral load capacity than nails or conventional screws
- Suitable for Service Class 2

Available Sizes For Application


| Code | Reference | Description | Box Qty |
|--------|------------|--|---------|
| 551110 | PSTS8.0x65 | Structural Timber Screw 8.0 x 65mm Hex Head | 100 |
| 551103 | PSTS8.0x85 | Structural Timber Screw 8.0 x 85mm Hex Head | 100 |

Dimensions (mm)

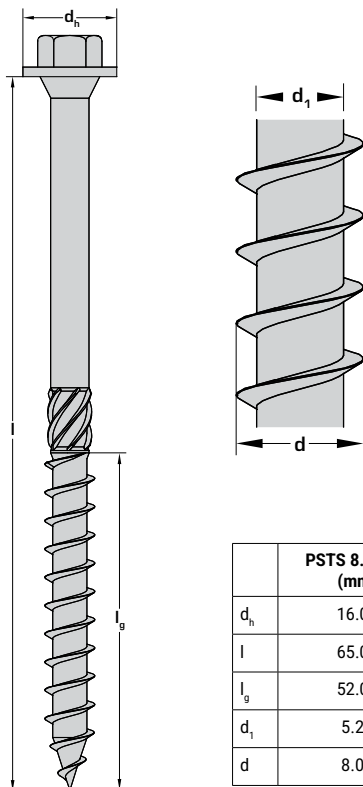

| | PSTS 8.0 x 65 (mm) | PSTS 8.0 x 85 (mm) |
|-------|-----------------------|-----------------------|
| d_h | 16.00 | 16.00 |
| l | 65.00 | 85.00 |
| l_o | 52.00 | 52.00 |
| d_1 | 5.25 | 5.25 |
| d | 8.00 | 8.00 |


In Situ

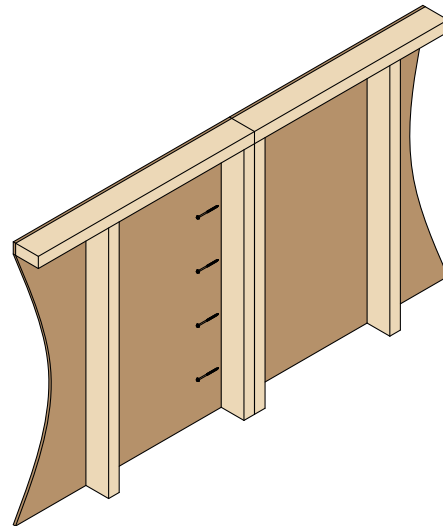

PSTS to be fixed at panel joints to engineer's specification.

PSTS can be fixed from both sides.

Once installed panels will be drawn tightly together to maximise strength and minimise air leakage.

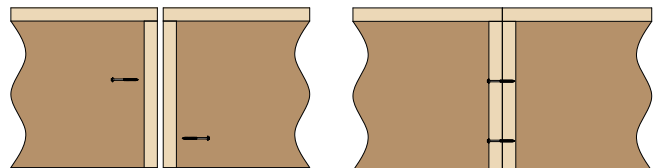

Load Data


| Thickness of Each Member (mm) | Length of Fastener (mm) | Characteristic Lateral Load-Carrying Capacity (kN) of 2 Member Joints Made From | | |
|----------------------------------|----------------------------|---|------|------|
| | | C16 | C24 | TR26 |
| 35 | 65 | 1.86 | 2.02 | 2.09 |
| 38 | 65 | 1.82 | 1.97 | 2.05 |
| 45 | 85 | 2.45 | 2.65 | 2.75 |
| 47 | 85 | 2.42 | 2.62 | 2.72 |

HRS


Head Restraint Screw

NEW

Scan or click to view
installation video

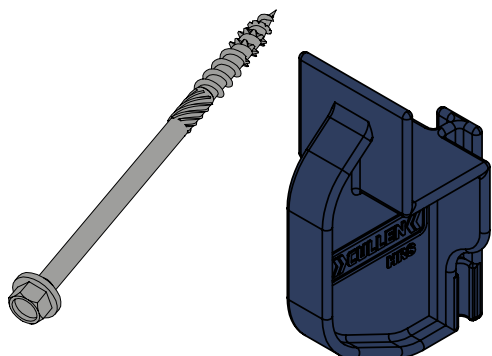

In Situ

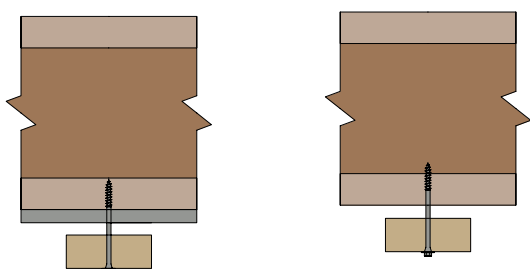

Load Data

| Product Code | Maximum Gap Between (mm) | Characteristic lateral load capacity per fixing (kN) |
|--------------|---|--|
| | Partition and joist or Partition and plasterboard (15mm max plasterboard) | Timber frame partition (C16min grade) - attached to engineered joist |
| 546496 | 15 | 1 |

*Drive the screw until the thread is fully embedded in the joist

Installation Instructions - Plasterboard pre-installed

The HRS is used for securing non-load bearing partitions to the floor structure and provides lateral restraint to the panel.

Features & Benefits

- Allows for joist/truss deflection
- Reduces plasterboard cracking and fixing defects
- Screw design reduces squeaks
- Plasterboard can be pre-installed
- Guide to support installation
- Requires no pre-drilling


Material Specification

- Carbon steel screw
- PA recyclable guide

Approvals


- Meets NHBC Technical requirements

Dimensions (mm)

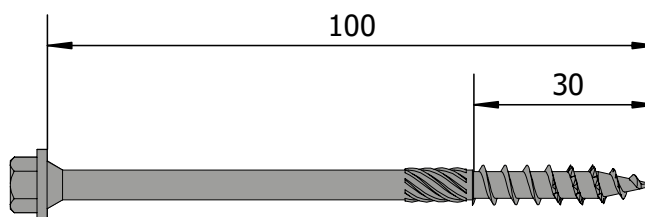


| Code | Description | Box Qty |
|--------|------------------------|---------|
| 546496 | PSTS 6.5 x 100 + Guide | 100 |

*Install the HRS at 1200mm centres maximum and ensure a minimum of two HRSs per partition, with a recommended edge distance of 200mm

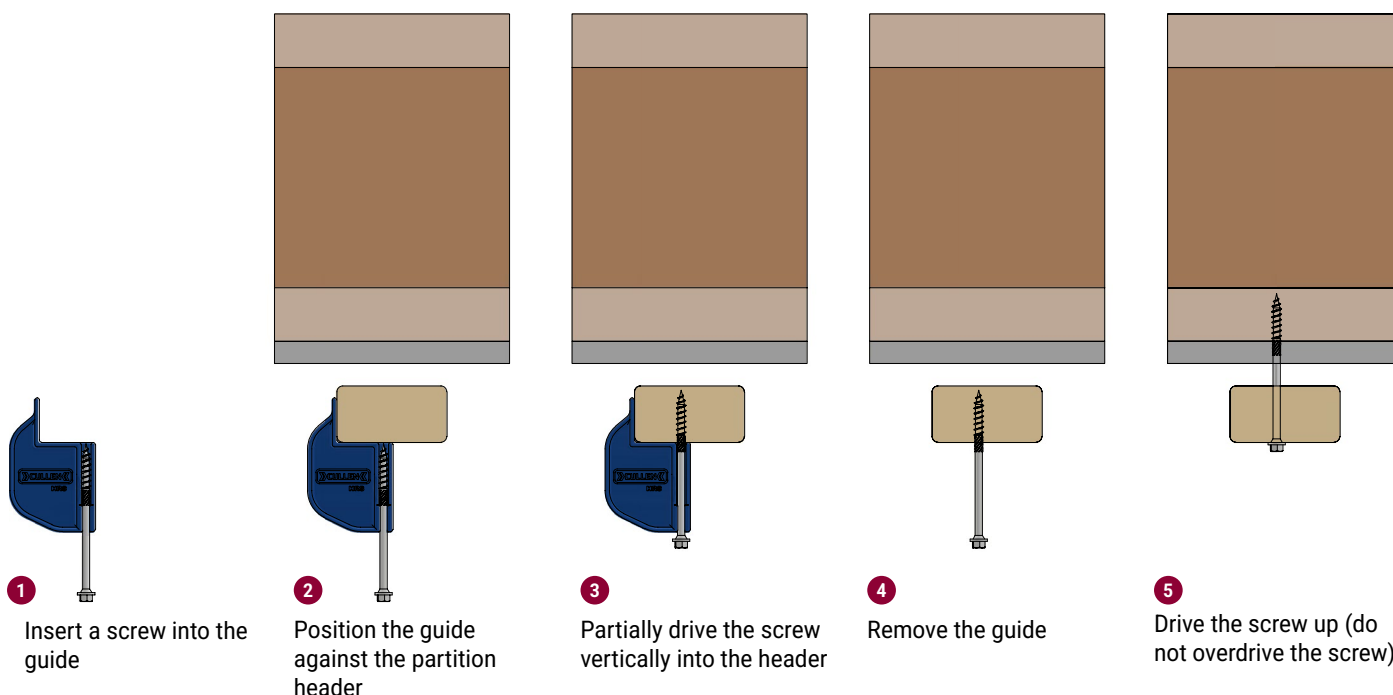


RD-CDCR

Corner Disproportionate Collapse Restraint

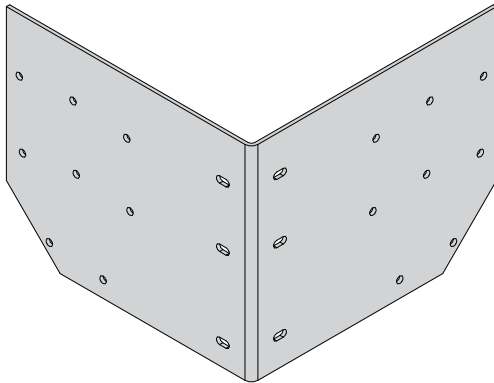

In Situ

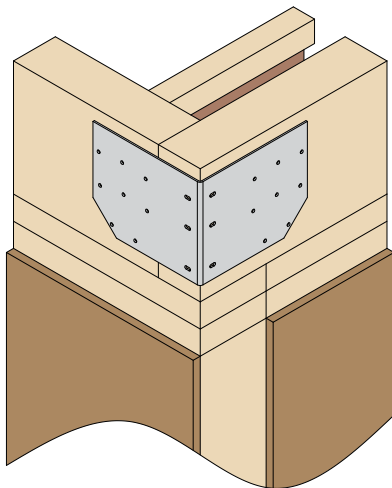

Must be installed on the outer side

The RD-CDCR hanger is a disproportionate collapse detail for connecting rim beams at corner junctions.

Features & Benefits

- Face fixed corner bracket with high load connection avoids base plate compromising air tightness of the rim beam
- One bracket to suit all joist depths


Material Specification

- Galvanised mild steel – Z275

Fixings

- 16No Paslode PSTS 6.5 x 35mm supplied with hanger
- 3No Paslode PSTS 6.5 x 115mm supplied with hanger

Dimensions (mm)

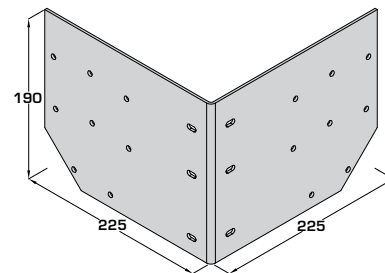


Installation

Suitable for 45mm and 90mm rim beams as shown in installations below.

150mm long screws are required when installing 90mm rim beams.

| Code | Description | Box Qty |
|--------|----------------|---------|
| 551107 | PSTS 6.5 x 150 | 100 |

Contact Technical Support to discuss other applications.

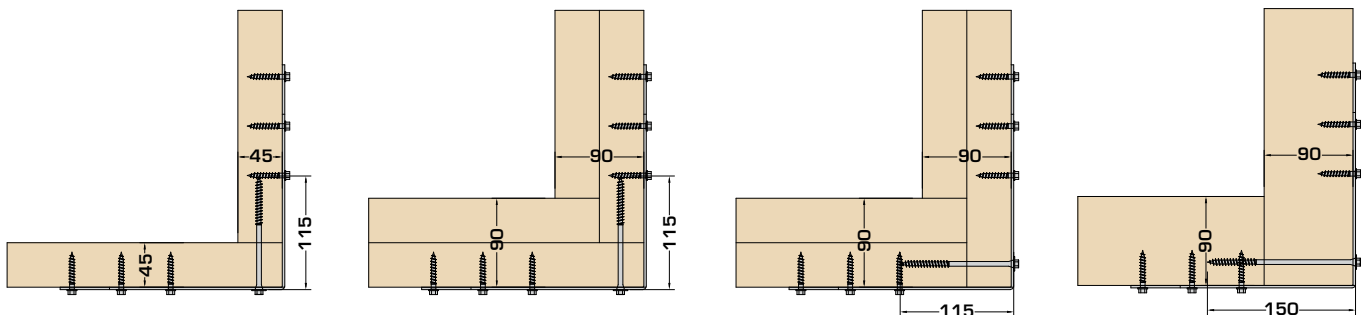

Load Data

| Product Code | Joist Depth (mm) | | Fixings | | Characteristic Capacity (kN)* for GL(Min GL28h & LVL |
|--------------|------------------|-----|-----------------|------------------|---|
| | Min | Max | PSTS 6.5 x 35mm | PSTS 6.5 x 115mm | |
| RD-CDCR | 220 | 304 | 16 | 3 | 25.00 |




*Values obtained from tests carried out by ITW Construction Products Offsite and calculated in accordance with ETAG 015

Timber Frame Wall Ties

Differential Movement in Timber Frame

| New Requirements (Build Type) | | Vertical Movement Allowed (mm) | Solution |
|-------------------------------|--------------------|--------------------------------|----------|
| Solid timber joists | 2 storey | 20 | FT |
| | 3 storey and above | 35+ | HMT |
| EWP joists | 2 storey | 15 | FT |
| | 3 storey | 25 | FT |
| | 4 storey and above | 35 – 60 | HMT |

Cullen standard wall ties FT-50, 75 & 100 accommodate maximum differential movement of 24mm and therefore can be used up to eaves level on a 2 storey for solid timber joists and up to 3 storey for EWP joist floors. For 3 storey solid timber joists and 4 storey EWP joists you will now require the Cullen High Movement Tie (HMT).

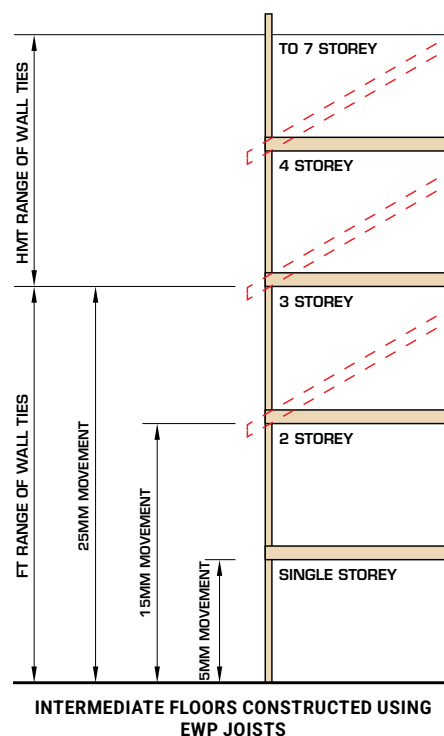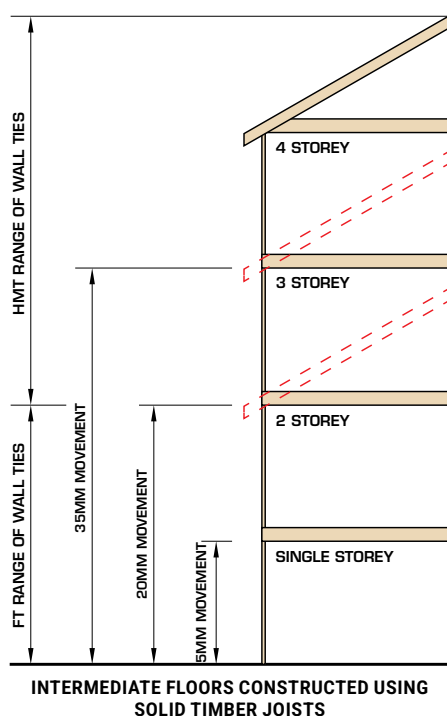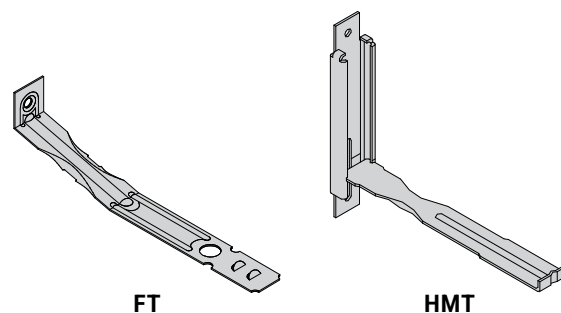


The above information is for guidance only, it states the maximum allowed movement of the Cullen timber frame wall tie range. For specific tie fixings please refer to the Building Engineer and/or section 6.2 of NHBC standards.

| Gap Location | W | Gap sizes Closing Gap (CG) at window sills level and Opening (OG) at windows head levels | |
|------------------------------|---|--|-------------------------|
| | | Joist Material | |
| | | Solid Timber (mm) | Engineered I-Joist (mm) |
| Bottom level (single storey) | A | 5 | 5 |
| Level 1 (2 storey) | B | 20 | 15 |
| Level 2 (3 storey) | C | 35 | 25 |
| Level 1 (4 storey) | D | 45 | 35 |
| Level 4 (5 storey) | E | | 45 |
| Level 5 (6 storey) | F | Specialist calculation to be submitted to NHBC | 53 |
| Level 6 (7 storey) | G | | 61 |
| Eaves / verge | | Add 5mm to level below | |

FT

Timber Frame Wall Tie

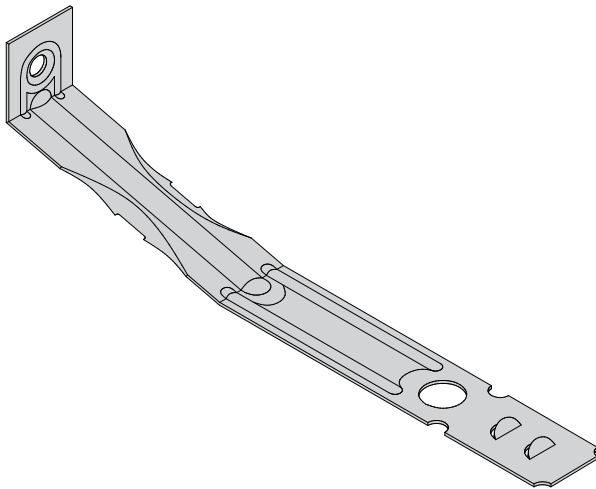

The FT wall ties are used to restrain the external blockwork/brickwork back to the timber frame structure.

Part of the Cullen Gable Restraint System – Pg134 - 135

Features & Benefits

- Accommodates maximum differential movement of 24mm
- Available to suit up to 115mm wide cavities

Material Specification

- Austenitic stainless steel


Approvals

- CE marked and tested in accordance with BS EN 845-1
- Meets NHBC & Homebond technical requirements

Fixings


3.35 x 50mm annular ring shank nails supplied with part

In Situ

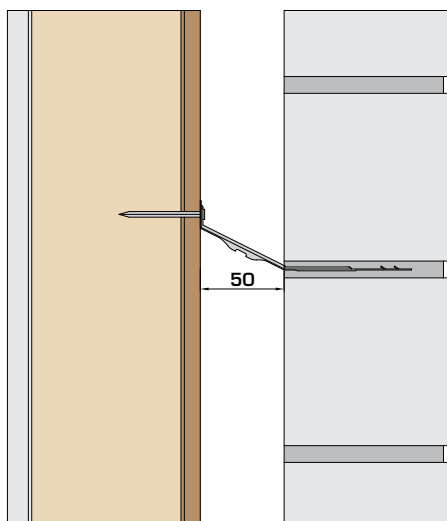

- Maximum horizontal expansion of 1.4mm on a 50mm cavity
- Additional ties are required at door and window openings (Spacing should be no more than 300mm vertical centres and within 225mm of the jambs at openings)
- Top row of ties should be 3 courses below top of brickwork
- Spacing also required at each side of vertical expansion joints
- Closer vertical spacing may be required in exposed locations as determined by the Building Designer
- Wall ties to be installed perpendicular to timber & blockwork these cannot be installed at a skew.

Dimensions (mm)

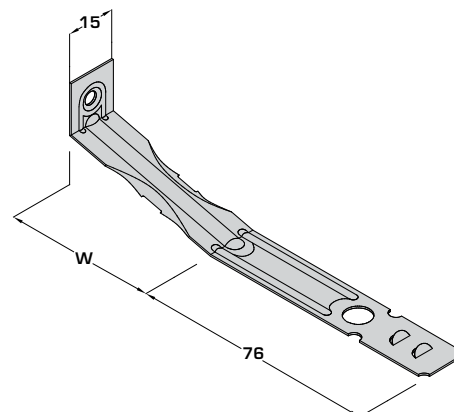

Load Data

On the basis of wall ties having different failures in different materials e.g. tension – nail withdrawal (timber), compression – buckling (steel), we are now no longer publishing the lowest values and to assist the Building Designer we have shown the test results, failures modes and calculations.

| Product Code | Cavity Width (mm) | | |
|--------------|-------------------|---------|---------|
| | Nominal (W) | Minimum | Maximum |
| FT-50 | 50 | 45 | 65 |
| FT-75 | 75 | 70 | 90 |
| FT-100 | 100 | 95 | 115 |

FT

Timber Frame Wall Tie

FT-50

Tested Values

| | Compression (kN) | Y_m | Tension (kN) | Y_m |
|------------------------|------------------|---|----------------------------|--------------------|
| Nail end (as received) | 1.057 | | 0.648 (nail withdrawal) | 1.3 ⁽¹⁾ |
| (24mm movement) | 0.612 | 1.15 ⁽³⁾ (buckling of tie – steel failure) | 0.690 | |
| Masonry end | 0.954 | 1.15 ⁽³⁾ (buckling of tie – steel failure) | 1.836 (masonry withdrawal) | 3 ⁽²⁾ |

(1) from BS EN1995-1-1 table 2.3 connections (fixing withdrawal of tie)

(2) from NA to BS EN1996-1-1 table NA.1 (mortar failure of tie)

(3) from NA to BS EN1995-1-1 table NA.3 (steel buckling of tie)

Based on the following criteria the following calculations have been done:

In the following examples a factored windload of 1.65kN/m² is suggested

| | | |
|------------------------------------|-------------------|--------------------------|
| Partial factor for variable action | | 1.5 |
| Combined pressure coefficient | | 1.1 |
| Peak velocity pressure | | = 1.0 kN/m ² |
| Applied wind load on gable panel | = 1.5 x 1.1 x 1.0 | = 1.65 kN/m ² |

| Failure | Test Result (kN) | Y_m | k_{mod} * | Result x k_{mod} / Y_m (kN) |
|-------------|------------------|-------|-------------|---------------------------------|
| Compression | 0.612 | 1.15 | 1.1 | 0.585 |
| Tension | 0.648 | 1.3 | 1.1 | 0.548 |
| Tension | 1.836 | 3 | 1.1 | 0.673 |
| Compression | 0.954 | 1.15 | 1.1 | 0.912 |
| | | | | 0.548 |

*An instantaneous action (k_{mod} value – 1.1) has been used.

Maximum net surface wind pressure for the FT-50

| Product Code | Vertical Tie Spacing (mm) | | | | | | | |
|--------------|-----------------------------------|---------|-------|---------|-------|---------|-------|---------|
| | 225 | | 300 | | 375 | | 450 | |
| | Stud Centres (mm) | | | | | | | |
| | 600 | | 600 | | 600 | | 600 | |
| | Maximum Net Surface Wind Pressure | | | | | | | |
| | kN/m² | ties/m² | kN/m² | ties/m² | kN/m² | ties/m² | kN/m² | ties/m² |
| FT-50 | 4.05 | 7.4 | 3.01 | 5.5 | 2.41 | 4.4 | 2.02 | 3.7 |

| | | | | |
|--|--|--|--|---|
| | 1000/225 = 4.4444 4.4444x(1000/600) = 7.4 ties/m ² | 1000/300 = 3.3333 3.3333x(1000/600) = 5.5 ties/m ² | 1000/375 = 2.6666 2.6666x(1000/600) = 4.4 ties/m ² | 1000/450 = 2.2222 2.2222x(1000/600) = 3.7ties/m ² |
|--|--|--|--|---|

| | | | | |
|--|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| Lowest failure (with Y_m & k_{mod} applied) | 0.548 x 7.4 = 4.05kN/m ² | 0.548 x 5.5 = 3.01kN/m ² | 0.548 x 4.4 = 2.41kN/m ² | 0.548 x 3.7 = 2.02kN/m ² |
|--|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|

| | | | | |
|---|------|------|------|------|
| Peak velocity pressure (kN/m ²) | 2.45 | 1.82 | 1.46 | 1.22 |
|---|------|------|------|------|

Based on the above values this could be worked backwards

Provide a maximum wind load for 3.7 ties/m² = (2.02/1.1/1.5) = 1.22kN/m² peak velocity pressure

Timber Frame Wall Tie

FT-75

Tested Values

| | Compression (kN) | Y_m | Tension (kN) | Y_m |
|------------------------|------------------|---|----------------------------|--------------------|
| Nail end (as received) | 0.504 | | 0.672 (nail withdrawal) | 1.3 ⁽¹⁾ |
| (24mm movement) | 0.582 | 1.15 ⁽³⁾ (buckling of tie – steel failure) | 0.690 | |
| Masonry end | 0.786 | 1.15 ⁽³⁾ (buckling of tie – steel failure) | 2.265 (masonry withdrawal) | 3 ⁽²⁾ |

(1) from BS EN1995-1-1 table 2.3 connections (fixing withdrawal of tie)

(2) from NA to BS EN1996-1-1 table NA.1 (mortar failure of tie)

(3) from NA to BS EN1995-1-1 table NA.3 (steel buckling of tie)

Based on the following criteria the following calculations have been done:

In the following examples a factored windload of 1.65kN/m² is suggested

| | | |
|------------------------------------|-------------------|--------------------------|
| Partial factor for variable action | | 1.5 |
| Combined pressure coefficient | | 1.1 |
| Peak velocity pressure | | = 1.0 kN/m ² |
| Applied wind load on gable panel | = 1.5 x 1.1 x 1.0 | = 1.65 kN/m ² |

| Failure | Test Result (kN) | Y_m | k_{mod} | Result x k_{mod} / Y_m (kN) |
|-------------|------------------|-------|-----------|---------------------------------|
| Compression | 0.504 | 1.15 | 1.1 | 0.482 |
| Tension | 0.672 | 1.3 | 1.1 | 0.568 |
| Tension | 2.265 | 3 | 1.1 | 0.830 |
| Compression | 0.786 | 1.15 | 1.1 | 0.751 |
| | | | | 0.482 |

*An instantaneous action (k_{mod} value – 1.1) has been used.

Maximum net surface wind pressure for the FT-75

| Product Code | Vertical Tie Spacing (mm) | | | | | | | |
|--|---|---------|---|---------|---|---------|--|---------|
| | 225 | | 300 | | 375 | | 450 | |
| | Stud Centres (mm) | | | | | | | |
| | 600 | | 600 | | 600 | | 600 | |
| | Maximum Net Surface Wind Pressure | | | | | | | |
| | kN/m² | ties/m² | kN/m² | ties/m² | kN/m² | ties/m² | kN/m² | ties/m² |
| FT-75 | 3.56 | 7.4 | 2.65 | 5.5 | 2.12 | 4.4 | 1.78 | 3.7 |
| | 1000/225 = 4.4444 4.444x(1000/600) = 7.4 ties/m² | | 1000/300 = 3.3333 3.333x(1000/600) = 5.5 ties/m² | | 1000/375 = 2.6666 2.666x(1000/600) = 4.4 ties/m² | | 1000/450 = 2.2222 2.222x(1000/600) = 3.7ties/m² | |
| Lowest failure (with Ym & kmod applied) | 0.482 x 7.4 = 3.56kN/m² | | 0.482 x 5.5 = 2.65kN/m² | | 0.482 x 4.4 = 2.12kN/m² | | 0.482 x 3.7 = 1.78kN/m² | |
| Peak velocity pressure (kN/m²) | 2.157 | | 1.606 | | 1.284 | | 1.078 | |

Based on the above values this could be worked backwards

Provide a maximum wind load for 3.7 ties/m² = (1.78/1.1/1.5) = 1.078kN/m² peak velocity pressure

FT

Timber Frame Wall Tie

FT-100

Tested Values

| | Compression (kN) | Y_m | Tension (kN) | Y_m |
|------------------------|------------------|---|----------------------------|--------------------|
| Nail end (as received) | 0.522 | | 0.756 (nail withdrawal) | 1.3 ⁽¹⁾ |
| (24mm movement) | 0.504 | 1.15 ⁽³⁾ (buckling of tie – steel failure) | 0.840 | |
| Masonry end | 1.417 | 1.15 ⁽³⁾ (buckling of tie – steel failure) | 0.943 (masonry withdrawal) | 3 ⁽²⁾ |

(1) from BS EN1995-1-1 table 2.3 connections (fixing withdrawal of tie)

(2) from NA to BS EN1996-1-1 table NA.1 (mortar failure of tie)

(3) from NA to BS EN1995-1-1 table NA.3 (steel buckling of tie)

Based on the following criteria the following calculations have been done:

In the following examples a factored windload of 1.65kN/m² is suggested

| | | |
|------------------------------------|-------------------|--------------------------|
| Partial factor for variable action | | 1.5 |
| Combined pressure coefficient | | 1.1 |
| Peak velocity pressure | | = 1.0 kN/m ² |
| Applied wind load on gable panel | = 1.5 x 1.1 x 1.0 | = 1.65 kN/m ² |

| Failure | Test Result (kN) | Y_m | k_{mod} | Result x k_{mod} / Y_m (kN) |
|-------------|------------------|-------|-----------|---------------------------------|
| Compression | 0.504 | 1.15 | 1.1 | 0.482 |
| Tension | 0.756 | 1.3 | 1.1 | 0.639 |
| Tension | 0.943 | 3 | 1.1 | 0.345 |
| Compression | 1.417 | 1.15 | 1.1 | 1.355 |
| | | | | 0.345 |

*An instantaneous action (k_{mod} value – 1.1) has been used.

Maximum net surface wind pressure for the FT-100

| Product Code | Vertical Tie Spacing (mm) | | | | | | | |
|--------------|-----------------------------------|---------|-------|---------|-------|---------|-------|---------|
| | 225 | | 300 | | 375 | | 450 | |
| | Stud Centres (mm) | | | | | | | |
| | 600 | | 600 | | 600 | | 600 | |
| | Maximum Net Surface Wind Pressure | | | | | | | |
| | kN/m² | ties/m² | kN/m² | ties/m² | kN/m² | ties/m² | kN/m² | ties/m² |
| FT-100 | 2.55 | 7.4 | 1.89 | 5.5 | 1.51 | 4.4 | 1.27 | 3.7 |

| | | | | |
|--|--|--|--|--|
| | 1000/225 = 4.4444 4.4444x(1000/600) = 7.4 ties/m ² | 1000/300 = 3.3333 3.3333x(1000/600) = 5.5 ties/m ² | 1000/375 = 2.6666 2.6666x(1000/600) = 4.4 ties/m ² | 1000/450 = 2.2222 2.2222x(1000/600) = 3.7 ties/m ² |
|--|--|--|--|--|

| | | | | |
|--|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| Lowest failure (with Y_m & k_{mod} applied) | 0.345 x 7.4 = 2.55kN/m ² | 0.345 x 5.5 = 1.89kN/m ² | 0.345 x 4.4 = 1.51kN/m ² | 0.345 x 3.7 = 1.27kN/m ² |
|--|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|

| | | | | |
|--|------|------|------|------|
| Peak velocity pressure (kN/m ²) | 1.54 | 1.14 | 0.91 | 0.76 |
|--|------|------|------|------|

Based on the above values this could be worked backwards

Provide a maximum wind load for 3.7 ties/m² = (1.27/1.1/1.5) = 0.76kN/m² peak velocity pressure

FT-125-150

Timber Frame Wall Tie



The FT wall ties are used to restrain the external blockwork/brickwork back to the timber frame structure.

Part of the Cullen Gable Restraint System – Pg134 - 135

Features & Benefits

- Accommodates a maximum differential movement of 6mm
- Can suit up to 160mm wide cavities
- Variable cavity width to suit 125-150mm

Material Specification

- Austenitic stainless steel


Approvals

- CE marked and tested in accordance with BS EN 845-1
- Meets NHBC technical requirements

Fixings


3.35 x 50mm annular ring shank nails supplied with part

In Situ

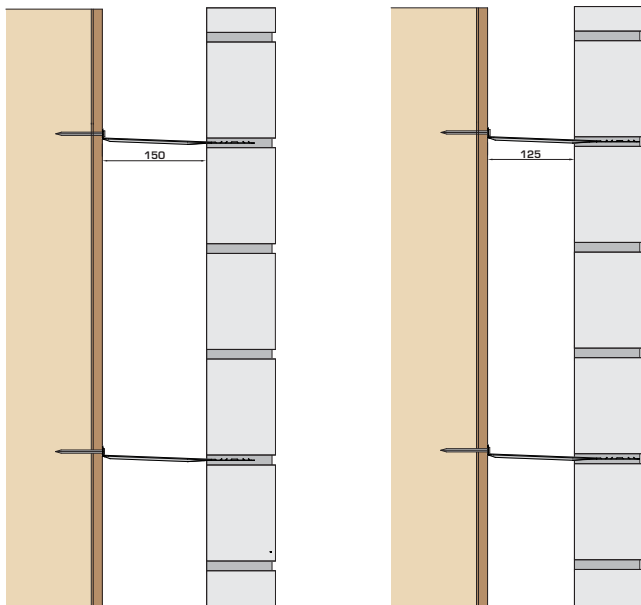

- Spacing also required at each side of vertical expansion joints
- Closer vertical spacing may be required in exposed locations as determined by the Building Designer
- Wall ties to be installed perpendicular to both the timber & blockwork; they cannot be installed at an angle

Dimensions (mm)

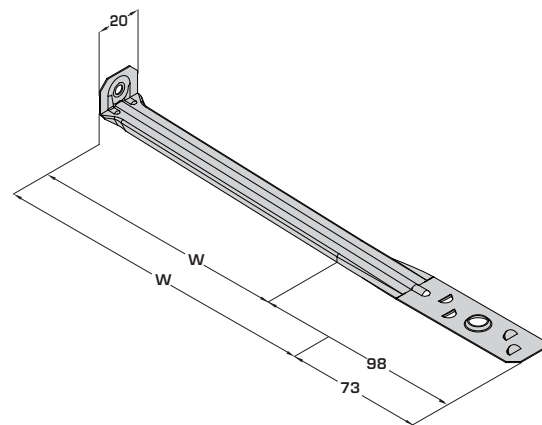

Load Data

Based on the varying failure rates of wall ties across different materials e.g., tension – nail withdrawal (timber), compression – buckling (steel), we will no longer publish the lowest values. To assist the Building Designer we have provided the test results, failures modes and calculations.

| Product Code | Cavity width (mm) | | |
|--------------|-------------------|---------|---------|
| | Nominal (W) | Minimum | Maximum |
| FT-125-150 | 125 | 120 | 160 |
| | 150 | | |

FT-125-150

Timber Frame Wall Tie

FT-125-150

Tested Values

| | Compression (kN) | Y_m | Tension (kN) | Y_m |
|------------------------|------------------|---|---------------------------|--------------------|
| Nail end (as received) | 0.551 | 1.15 ⁽³⁾ (buckling of tie – steel failure) | 0.78 (nail withdrawal) | 1.3 ⁽¹⁾ |
| (6mm movement) | 0.589 | 1.15 ⁽³⁾ (buckling of tie – steel failure) | 0.79 (nail withdrawal) | 1.3 ⁽¹⁾ |
| Masonry end | 0.51 | 1.15 ⁽³⁾ (buckling of tie – steel failure) | 2.66 (masonry withdrawal) | 3 ⁽²⁾ |

(1) from BS EN1995-1-1 table 2.3 connections (fixing withdrawal of tie)

(2) from NA to BS EN1996-1-1 table NA.1 (mortar failure of tie)

(3) from NA to BS EN1995-1-1 table NA.3 (steel buckling of tie)

Based on the criteria listed below, the following calculations have been performed:

In the included examples, a factored wind load of 1.65kN/m² is suggested:

| | | |
|------------------------------------|-------------------|--------------------------|
| Partial factor for variable action | | 1.5 |
| Combined pressure coefficient | | 1.1 |
| Peak velocity pressure | | = 1.0 kN/m ² |
| Applied wind load on gable panel | = 1.5 x 1.1 x 1.0 | = 1.65 kN/m ² |

| Failure | Test Result (kN) | Y_m | k_{mod} | Result x k_{mod} / Y_m (kN) |
|-------------|------------------|-------|-----------|---------------------------------|
| Compression | 0.551 | 1.15 | 1.1 | 0.527 |
| Tension | 0.78 | 1.3 | 1.1 | 0.66 |
| Tension | 2.66 | 3 | 1.1 | 0.975 |
| Compression | 0.51 | 1.15 | 1.1 | 0.487 |

*An instantaneous action (k_{mod} value – 1.1) has been used.

Maximum net surface wind pressure for the FT-125-150

| Product Code | Vertical Tie Spacing (mm) | | | | | | | |
|--------------|-----------------------------------|---------|-------|---------|-------|---------|-------|---------|
| | 225 | | 300 | | 375 | | 450 | |
| | Stud Centres (mm) | | | | | | | |
| | 600 | | 600 | | 600 | | 600 | |
| | Maximum Net Surface Wind Pressure | | | | | | | |
| | kN/m² | ties/m² | kN/m² | ties/m² | kN/m² | ties/m² | kN/m² | ties/m² |
| FT-125-150 | 2.55 | 7.4 | 1.89 | 5.5 | 1.51 | 4.4 | 1.27 | 3.7 |

| | | | | |
|--|--|--|--|---|
| | 1000/225 = 4.4444 4.4444x(1000/600) = 7.4 ties/m ² | 1000/300 = 3.3333 3.3333x(1000/600) = 5.5 ties/m ² | 1000/375 = 2.6666 2.6666x(1000/600) = 4.4 ties/m ² | 1000/450 = 2.2222 2.2222x(1000/600) = 3.7ties/m ² |
|--|--|--|--|---|

| | | | | |
|--|------------------------------------|-------------------------------------|-------------------------------------|------------------------------------|
| Lowest failure (with Y_m & k_{mod} applied) | 0.487 x 7.4 = 3.6kN/m ² | 0.487 x 5.5 = 2.67kN/m ² | 0.487 x 4.4 = 2.14kN/m ² | 0.487 x 3.7 = 3.7kN/m ² |
|--|------------------------------------|-------------------------------------|-------------------------------------|------------------------------------|

| | | | | |
|--|------|------|------|------|
| Peak velocity pressure (kN/m ²) | 2.18 | 1.61 | 1.29 | 1.09 |
|--|------|------|------|------|

Based on the above values this could be worked backwards

Provide a maximum wind load for 3.7 ties/m² = (1.8/1.1/1.5) = 1.09kN/m² peak velocity pressure

HMT

High Movement Timber Frame Wall Tie



The HMT wall ties are used to restrain the external blockwork/brickwork back to the timber framed structure. They provide greater performance to accommodate differential movement in medium to high-rise structures.

Features & Benefits

- Accommodates maximum differential movement of 75mm

Material Specification


- Austenitic stainless steel

Approvals

- CE marked & tested in accordance with BS EN 845-1
- Meets NHBC & Homebond technical requirements


Fixings

3.35 x 50mm annular ring shank nails supplied with part

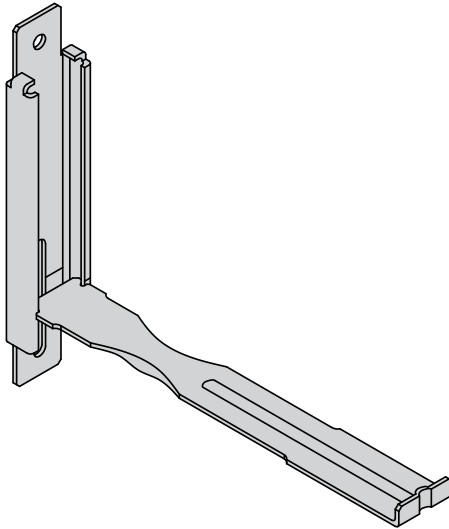


Installation Instructions

STAGE 1

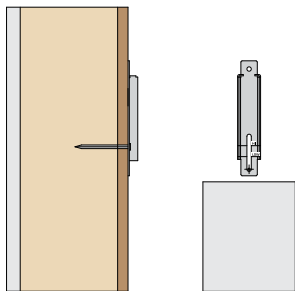


Nail channel into wall panel by nailing 1 No fixing at the bottom of the slot. Allow adequate space above the masonry to hammer fix.

In Situ

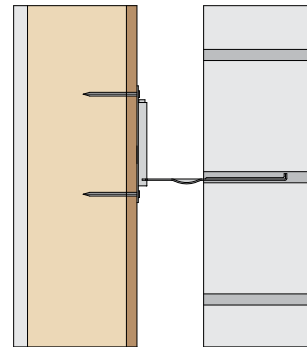


STAGE 2

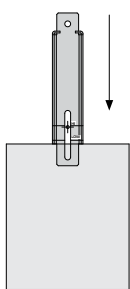

Position channel by lightly tapping with a hammer until channel is in correct position.

The tie should line through with the LOW marker to allow full 75mm movement.


STAGE 3

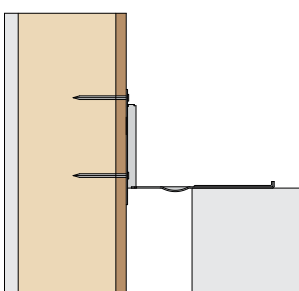

Once the channel is in position fix the top round hole into the wall panel, position the tie and build the next course of block work.

LOW – 75mm movement
HIGH – 65mm movement

Dimensions (mm)

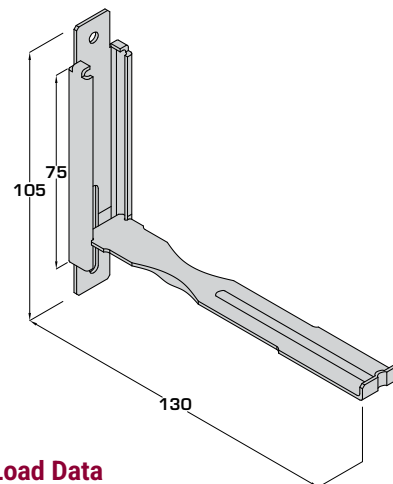

Load Data

On the basis of wall ties having different failures in different materials e.g. tension – nail withdrawal (timber), compression – buckling (steel), we are now no longer publishing the lowest values and to assist the Building Designer we have shown the test results, failures modes and calculations.

HMT

High Movement Timber Frame Wall Tie

HMT-50

| Product Code | Cavity width (mm) | | |
|--------------|-------------------|---------|---------|
| | Nominal (W) | Minimum | Maximum |
| HMT-50 | 50 | 45 | 65 |

Tested Values

| | Compression (kN) | Y_m | Tension (kN) | Y_m |
|------------------------|------------------|---|----------------------------|--------------------|
| Nail end (as received) | 1.705 | 1.15 ⁽³⁾ (buckling of tie – steel failure) | 0.895 (nail withdrawal) | 1.3 ⁽¹⁾ |
| Masonry end | 2.376 | 1.15 ⁽³⁾ (buckling of tie – steel failure) | 2.176 (masonry withdrawal) | 3 ⁽²⁾ |

(1) from BS EN1995-1-1 table 2.3 connections (fixing withdrawal of tie)

(2) from NA to BS EN1996-1-1 table NA.1 (mortar failure of tie)

(3) from NA to BS EN1995-1-1 table NA.3 (steel buckling of tie)

Based on the following criteria the following calculations have been done:

In the following examples a factored windload of 1.65kN/m² is suggested

| | | |
|------------------------------------|-------------------|--------------------------|
| Partial factor for variable action | | 1.5 |
| Combined pressure coefficient | | 1.1 |
| Peak velocity pressure | | = 1.0 kN/m ² |
| Applied wind load on gable panel | = 1.5 x 1.1 x 1.0 | = 1.65 kN/m ² |

| Failure | Test Result (kN) | Y_m | k_{mod} | Result x k_{mod} / Y_m (kN) |
|-------------|------------------|-------|-----------|---------------------------------|
| Compression | 1.705 | 1.15 | 1.1 | 1.63 |
| Tension | 0.895 | 1.3 | 1.1 | 0.757 |
| Tension | 2.176 | 3 | 1.1 | 0.797 |
| Compression | 2.376 | 1.15 | 1.1 | 2.272 |
| | | | | 0.757 |

*An instantaneous action (k_{mod} value – 1.1) has been used.

Maximum net surface wind pressure for the HMT-50

| Product Code | Vertical Tie Spacing (mm) | | | | | | | |
|--------------|-----------------------------------|---------|-------|---------|-------|---------|-------|---------|
| | 225 | | 300 | | 375 | | 450 | |
| | Stud Centres (mm) | | | | | | | |
| | 600 | | 600 | | 600 | | 600 | |
| | Maximum Net Surface Wind Pressure | | | | | | | |
| | kN/m² | ties/m² | kN/m² | ties/m² | kN/m² | ties/m² | kN/m² | ties/m² |
| HMT-50 | 5.6 | 7.4 | 4.16 | 5.5 | 3.33 | 4.4 | 2.8 | 3.7 |

| | | | | |
|--|--|--|--|---|
| | 1000/225 = 4.4444 4.4444x(1000/600) = 7.4 ties/m ² | 1000/300 = 3.3333 3.3333x(1000/600) = 5.5 ties/m ² | 1000/375 = 2.6666 2.6666x(1000/600) = 4.4 ties/m ² | 1000/450 = 2.2222 2.2222x(1000/600) = 3.7ties/m ² |
|--|--|--|--|---|


| | | | | |
|---|------------------------------------|-------------------------------------|-------------------------------------|------------------------------------|
| Lowest failure (with Y_m & k_{mod} applied) | 0.757 x 7.4 = 5.6kN/m ² | 0.757 x 5.5 = 4.16kN/m ² | 0.757 x 4.4 = 3.33kN/m ² | 0.757 x 3.7 = 2.8kN/m ² |
|---|------------------------------------|-------------------------------------|-------------------------------------|------------------------------------|

| | | | | |
|---|------|------|------|------|
| Peak velocity pressure (kN/m ²) | 3.39 | 2.52 | 2.01 | 1.69 |
|---|------|------|------|------|

Based on the above values this could be worked backwards
Provide a maximum wind load for 3.7 ties/m² = (2.8/1.1/1.5) = 1.69kN/m² peak velocity pressure

UZ CLIP

Noggin Support

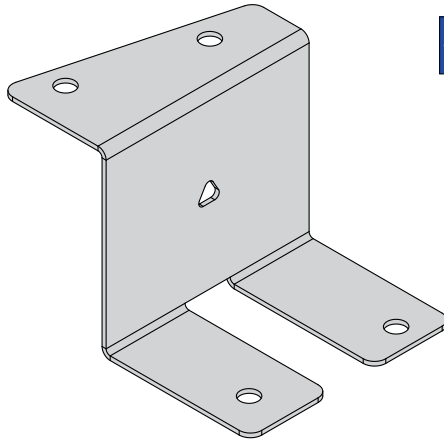

The UZ Clip is a multifunctional connector for solid timber noggins.

Features & Benefits

- Suitable for supporting noggins in various applications
- Adjacent noggins can be aligned without clashing

Material Specification

- Galvanised mild steel – Z275

Fixings


| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi


Available Sizes

| Product Code | Height (H) (mm) |
|--------------|-----------------|
| UZ-35 | 35 |
| UZ-38 | 38 |
| UZ-45 | 45 |
| UZ-47 | 47 |

Dimensions (mm)

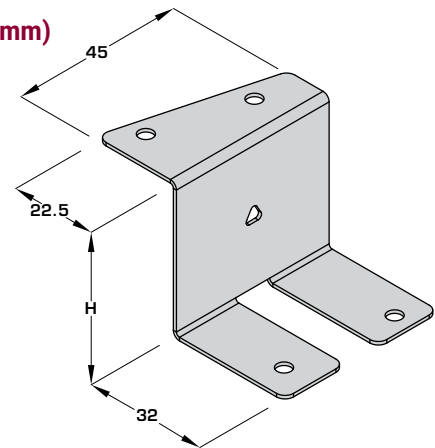


In Situ

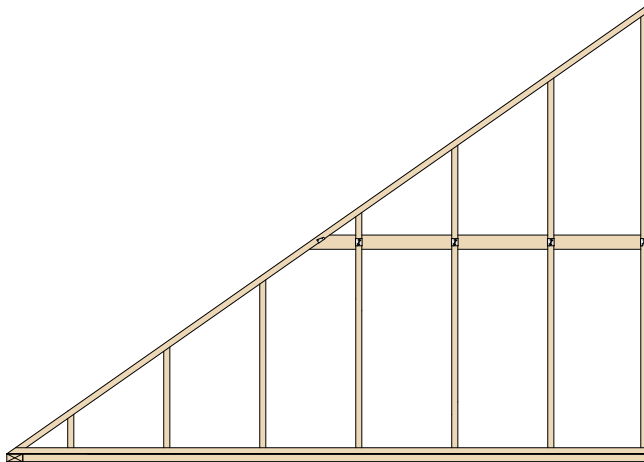

PLASTERBOARD NOGGINS


Supporting plasterboard in spandrel panels
or other timber panel applications

Installation

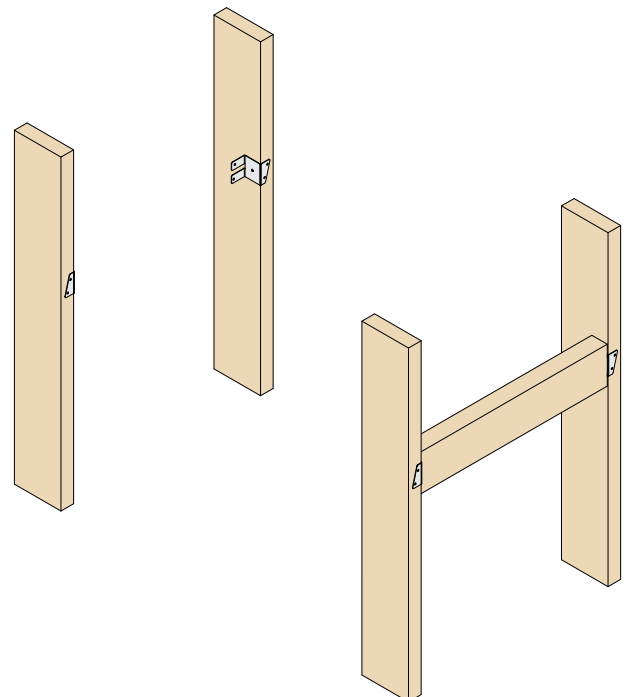

EWP Timber Hanger Overview

I-JOIST APPLICATIONS

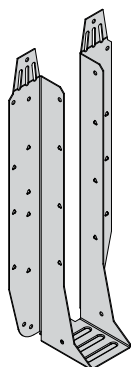


(39 – 100mm wide)

UH

Pages 52 – 60


STANDARD

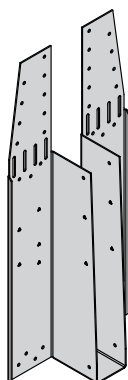

HUH


Pages 66 – 69

HIGH LOAD

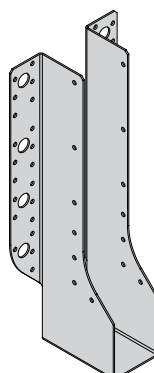

MHE


Pages 80 – 81

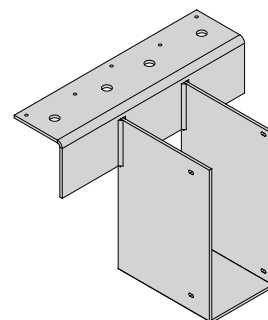

FTHI

Page 83


VERY HIGH LOAD

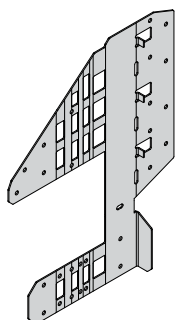

(39 – 100mm wide)

VRC


Pages 86 – 87

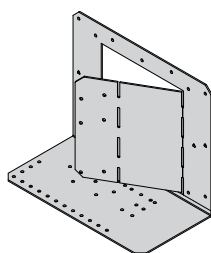

(39 – 100mm wide)

VS


Pages 84 – 85



(39 – 92mm wide)

45L/R


Page 89

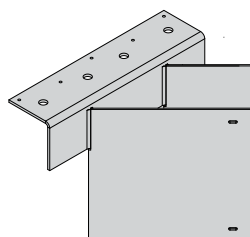

(39 – 300mm wide)

FTHIS

Page 83

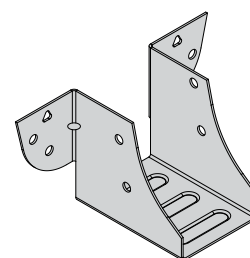


KM

Page 82

MINI

SLOPED* & SKEWED


(*VRC ONLY)

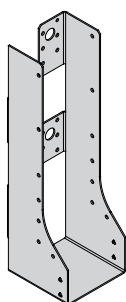

(39 – 78mm wide)

MHIC

Pages 80 – 81

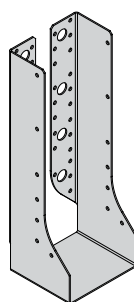


(92 – 300mm wide)

MHI

Pages 80 – 81


INTERNAL FLANGE

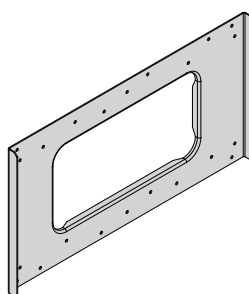

SHI

Page 101

SERVICE HOLE PLATE

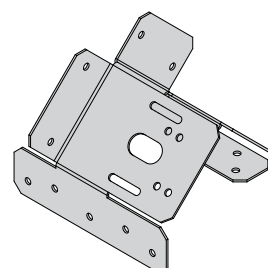


ACE

Page 88

RAFTER / WALL PLATE


OPEN WEB APPLICATIONS

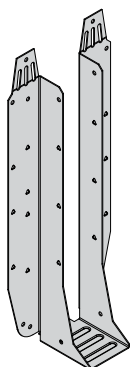

(39 – 100mm wide)


UH

Pages 60 – 65

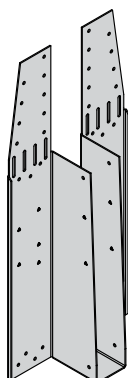


HUH

Pages 70 – 76

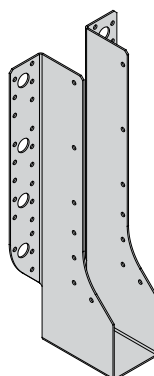

MHE

Pages 80 – 81

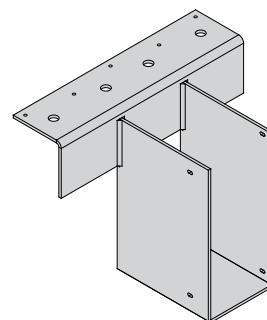


FTHI

Page 83

STANDARD

HIGH LOAD


VERY HIGH LOAD

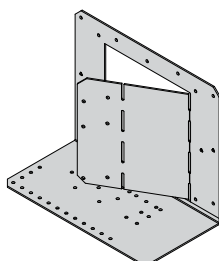

(39 – 100mm wide)

VS


Pages 84 – 85

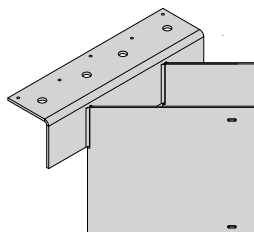

(39 – 300mm wide)

FTHIS


Page 83

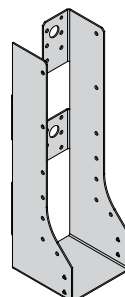

(39 – 78mm wide)

MHIC

Pages 80 – 81

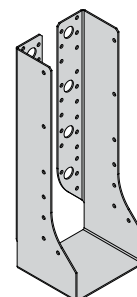

(92 – 300mm wide)


MHI

Pages 80 – 81

SKewed


INTERNAL FLANGE

ANCILLARY PRODUCTS

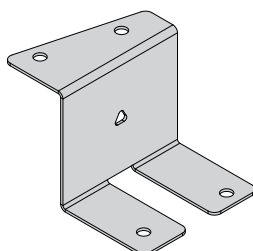


UZ CLIP

Pages 90 – 92



OW-CLIP

Pages 95 – 96

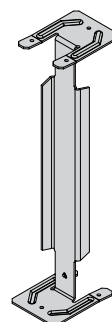

I-CLIP

Pages 93 – 94



PSTS

Pages 97 – 100

NOGGIN SUPPORT

MULTIPLE CONNECTIONS

At A Glance

UH – QUICK REFERENCE GUIDE

| | | Characteristic Capacity (kN) | | | | | | | | | | | | | | | | | | | | | | |
|--------|---|------------------------------|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| | | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 |
| Hanger | Header | | | | | | | | | | | | | | | | | | | | | | | |
| UH | I-Joist Without Backer / Top Tabs Removed | 7.43 – 7.83kN | | | | | | | | | | | | | | | | | | | | | | |
| | I-Joist Without Backer | 11.13 – 12.94kN | | | | | | | | | | | | | | | | | | | | | | |
| | I-Joist With Backer | 13.09 – 21.02kN | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | |
| | Open Web / Top Tabs Removed | 7.43kN | | | | | | | | | | | | | | | | | | | | | | |
| | Open Web | 13.23 – 14.19kN | | | | | | | | | | | | | | | | | | | | | | |
| | Open Web With Plywood Gusset | 16.84 – 22.16kN | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | |
| | Glulam (Min GL28) | 16.84 – 22.16kN | | | | | | | | | | | | | | | | | | | | | | |
| LVL | 15.25 – 22.17kN | | | | | | | | | | | | | | | | | | | | | | | |

HUH – QUICK REFERENCE GUIDE

| | | Characteristic Capacity (kN) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------|------------------------------|------------------------------|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| | | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 |
| Hanger | Header | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| HUH | I-Joist Without Backer | 15.50 – 18.50kN | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | I-Joist With Backer | 28.50kN | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Open Web | 13.95 – 18.60kN | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Open Web With Blocking | 24.00kN | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Open Web With Plywood Gusset | 29.50kN | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Glulam (Min GL28) | 29.50kN | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | LVL | 29.50kN | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

PLEASE REFER TO PRODUCT PAGES FOR EXACT LOAD CAPACITIES




UH (I-Joist Applications)

Universal Hanger

GB Patent 2497747



UK
CA

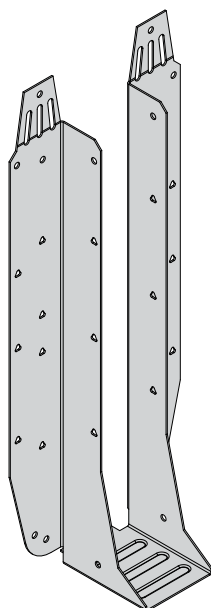

The UH hanger is designed for any joist to joist, joist to trimmer or joist to steel application.

Features & Benefits

- Elongated slots and unique snap off feature allows for height adjustment and face fix only option
- One hanger solution for backer and backerless I-Joists
- Rear location tab to assist with installation
- Additional triangular fixing holes for increased performance on solid members
- Suitable for connections to steel work – see pages 77 – 79

Material Specification

- Galvanised mild steel – Z275

Fixings


| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi
(or 3.5 x 30mm wood screw for sacrificial stairwell installation only)


Available Sizes

| Hanger Width (W) (mm) | 220 | 235 | 300 | >300 |
|--------------------------|------------|------------|------------|---|
| 39 | UH-39-220 | UH-39-235 | UH-39-300 | SEE HUH (PAGES 63 – 66) OR UH-MHE/ UZ-CLIP (PAGES 54 – 56) |
| 50 | UH-50-220 | UH-50-235 | UH-50-300 | |
| 55 | UH-55-220 | UH-55-235 | UH-55-300 | |
| 61 | UH-61-220 | UH-61-235 | UH-61-300 | |
| 65 | UH-65-220 | UH-65-235 | UH-65-300 | |
| 75 | UH-75-220 | UH-75-235 | UH-75-300 | |
| 78 | UH-78-220 | UH-78-235 | UH-78-300 | |
| 92 | UH-92-220 | UH-92-235 | UH-92-300 | |
| 100 | UH-100-220 | UH-100-235 | UH-100-300 | |
| >100 | | | | |


Dimensions (mm)

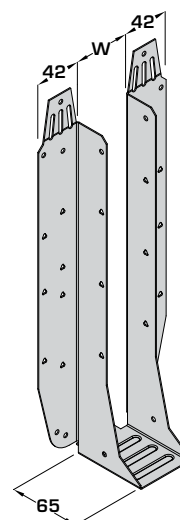


Height Suitability

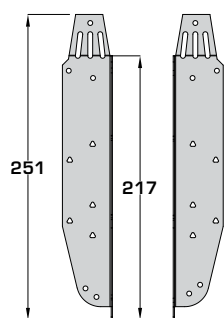

UH-220
(To suit 220mm deep i-joists)

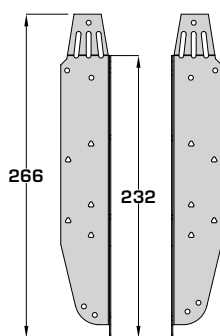

UH-235
(To suit 235 – 245mm deep i-joists)

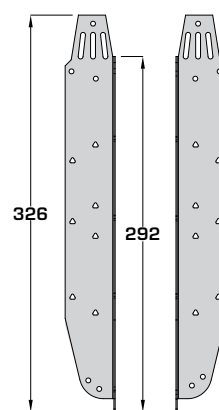


UH-300
(To suit 300 – 302mm deep i-joists)

UH (I-Joist Applications)

Universal Hanger

Standard Installation – I-Joist Header without Backer Block

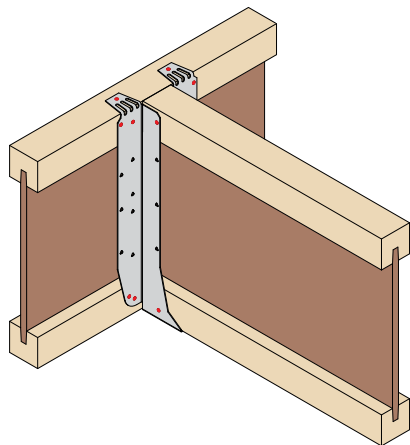

See Page 56 For Installation Instructions


- Fill all red holes as indicated for this installation
- No backer block required
- No web stiffeners required*
- Top tabs to be wiped over and nailed
- Additional triangular holes into face only required for solid headers

*Additional triangular holes into incoming joist only required for enhanced uplift. (for details see page 51)

Load Data

| Hanger Depth (mm) (Depth Dependent Only) | Fixings (3.4 x 35mm) | | | Characteristic Capacity (kN) | | |
|---|----------------------|-----|----------|------------------------------|----------------|------------|
| | Header | | Incoming | Uplift | I-Joist Header | |
| | Face | Top | | | Solid Flange | LVL Flange |
| 220 | 8 | 2 | 4 | 3.97 | 11.13 | 12.94 |
| 235 | 8 | 2 | 4 | 3.97 | 11.89 | 11.79 |
| 300 | 8 | 2 | 4 | 3.97 | 11.89 | 11.79 |

Enhanced Installation – I-Joist Header with Backer Block

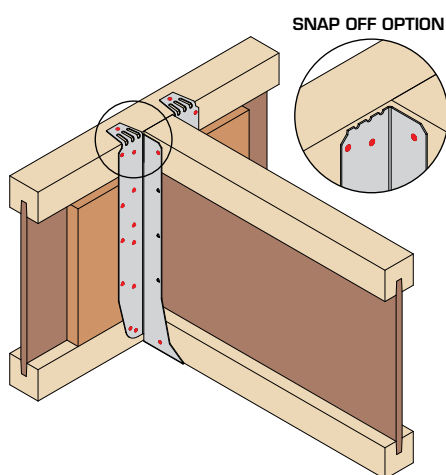

See Page 56 For Installation Instructions

- Fill all red holes as indicated for this installation
- All nail holes filled into backer block (including triangular)
- Backer block required to hanger side only (follow I-joist manufacturer's guidelines)
- No web stiffeners required when using same hanger/joist depth*
- Top tabs to be wiped over and nailed or snapped off to give face fix only option

*Additional triangular holes into incoming joist only required for enhanced uplift. (for details see page 51)

Load Data


| Hanger Depth (mm) (Depth Dependent Only) | Fixings (3.4 x 35mm) | | | Characteristic Capacity (kN) | | |
|---|----------------------|---------|----------|------------------------------|----------------|------------|
| | Header | | Incoming | Uplift | I-Joist Header | |
| | Face | Top | | | Solid Flange | LVL Flange |
| 220 | 18 | 2 (0**) | 4 | 3.97 | 19.66 | 18.81 |
| 235 | 18 | 2 (0**) | 4 | 3.97 | 19.66 | 18.81 |
| 300 | 22 | 2 (0**) | 4 | 3.97 | 21.02 | 20.88 |

**No fixings required when using snap off option.

UH (I-Joist Applications)

Universal Hanger

Enhanced Installation – Solid Header

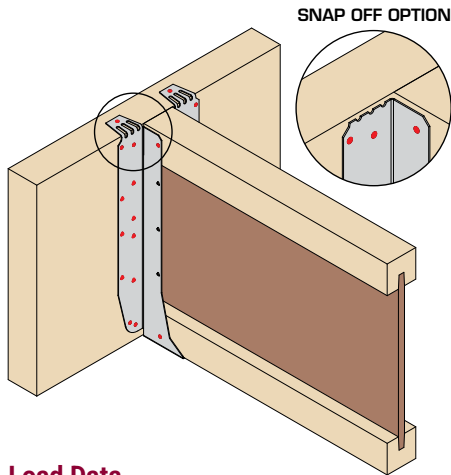

- Fill all red holes as indicated for this installation
- All nail holes filled into solid header (including triangular)
- No web stiffeners required when using same hanger/joist depth*
- Top tabs to be wiped over and nailed or snapped off to give face fix only option


*Additional triangular holes into incoming joist only required for enhanced uplift.
(for details see below)

Load Data

| Hanger Depth (mm) | Fixings (3.4 x 35mm) | | | Characteristic Capacity (kN) | | |
|-------------------|----------------------|---------|----------|------------------------------|-------------------|-------|
| | Header | | Incoming | Uplift | Solid Header | |
| | Face | Top | | | GL (Min GL28h) | LVL |
| 220 | 18 | 2 (0**) | 4 | 3.97 | 19.69 | 18.65 |
| 235 | 18 | 2 (0**) | 4 | 3.97 | 22.16 | 21.58 |
| 300 | 22 | 2 (0**) | 4 | 3.97 | 22.16 | 22.17 |

**No fixings required when using snap off option.


Enhanced Uplift

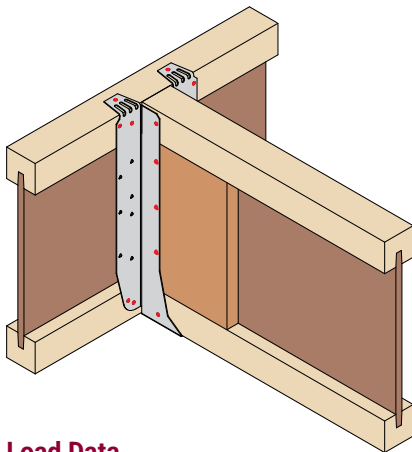

- Fill all red holes as indicated for this installation
- Fixings into the incoming joist are required to resist uplift
- Increased uplift figures can be achieved by nailing the additional triangular nail holes into the incoming member – solid incoming or web stiffeners are required

Load Data

| Hanger Depth (mm) | Fixings (3.4 x 35mm) | Characteristic Capacity (kN) |
|------------------------|----------------------|------------------------------|
| (Depth Dependent Only) | Incoming | Uplift |
| 220 – 300 | 8 | 7.97 |

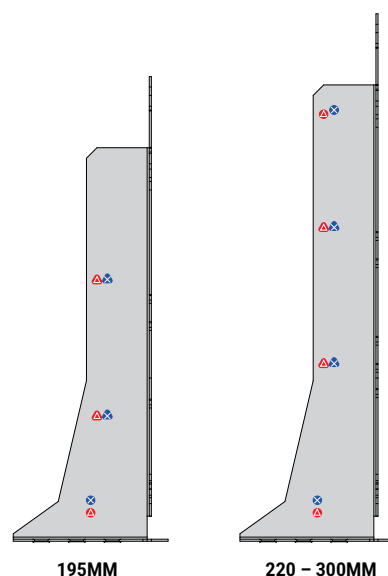

△ Near side


△ Far side

UH (I-Joist Applications)


Universal Hanger

Sacrificial Stairwell Installation

Face Fix Option

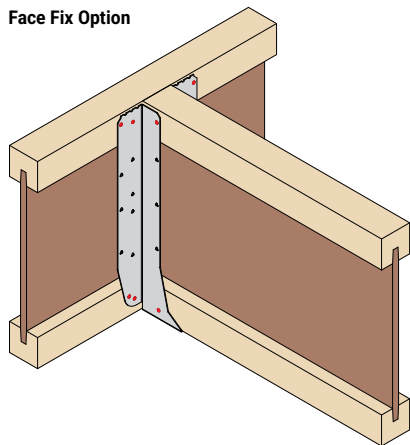

Top Fix Option

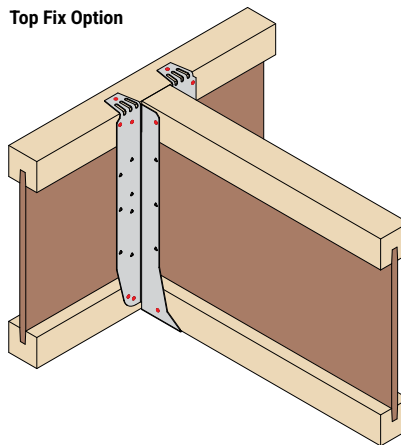

- Fill all red holes as indicated for these installations
- No backer blocks required
- No web stiffeners required

Load Data


| Hanger Depth (mm) (Depth Dependent Only) | Fixings (3.4 x 35mm) | | | Characteristic Capacity (kN) | | |
|---|----------------------|---------|----------|------------------------------|----------------|------------|
| | Header | | Incoming | Uplift | I-Joist Header | |
| | Face | Top | | | Solid Flange | LVL Flange |
| 220 | 8 | 2 (0**) | 4 | 3.97 | 7.43 | 7.83 |
| 235 | 8 | 2 (0**) | 4 | 3.97 | 7.43 | 7.83 |
| 300 | 8 | 2 (0**) | 4 | 3.97 | 7.43 | 7.83 |

**No fixings required when using snap off option.

3.5 x 30mm multi-purpose wood screws may be used as an alternative fixing for temporary supporting hanger.

Installation Instructions

Face Fix Option

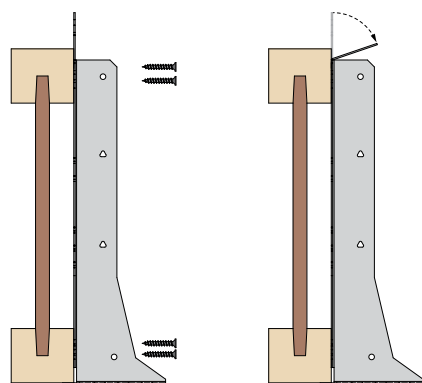


Face fix to top and bottom flanges using 8No 3.5 x 30mm multi purpose wood screws or 3.4 x 35mm square twist nails.

Bend tabs forward and snap off.

Once ready for stairs to be installed the deck can be cut and joists/hangers removed.

Top Fix Option

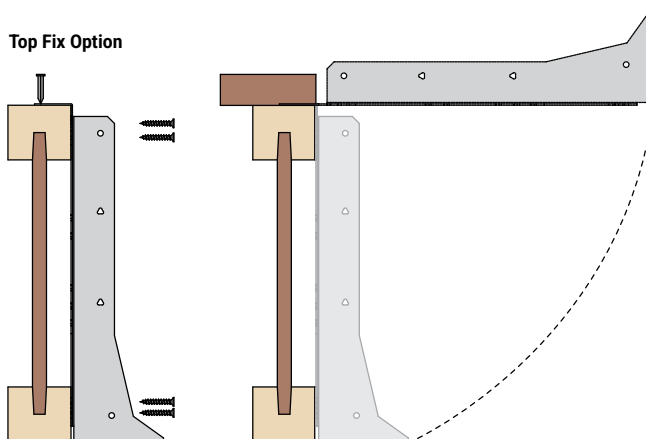

Face fix to top and bottom flanges using 8No 3.5 x 30mm multi purpose wood screws or 3.4 x 35mm square twist nails.

Bend top tabs over joist top flange and nail using 1No 3.4 x 35mm square twist nail per leg.

Once ready for stairs to be installed the deck can be cut and joists/hangers removed.


Hanger to be rotated through 90 degrees to snap off at break line.

UH (I-Joist Applications)

Universal Hanger


Standard Installation Instructions – I-Joist Header without Backer Block

Stage 1

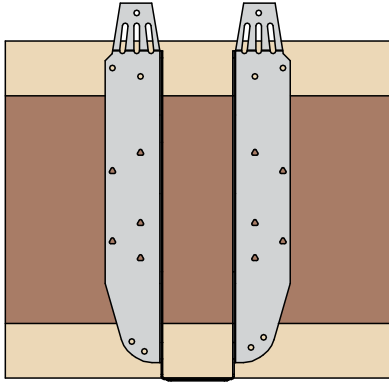


Position hanger against face of I-Joist with locating tab tight to underside of joist.

Stage 2

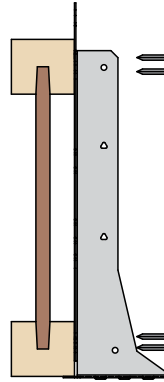


Face nail to top and bottom flanges using 8No 3.4 x 35mm square twist nails in total.

Stage 3

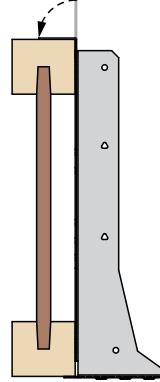

Wipe over top tabs to give a flush fit to the joist.


Stage 4

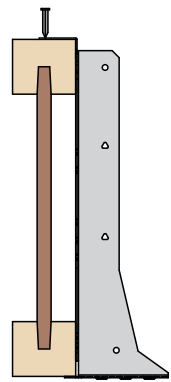

Nail top tabs into top flange of joist – 1No 3.4 x 35mm square twist nail per tab.

Enhanced Installation Instructions – I-Joist Header with Backer Block


Stage 1

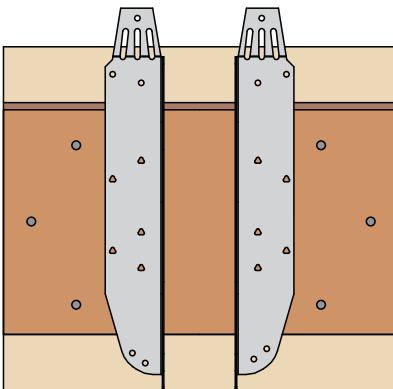

Position hanger against face of I-Joist with locating tab tight to underside of joist.

Backer block installed as per I-Joist manufacturer's guidelines.


Stage 2

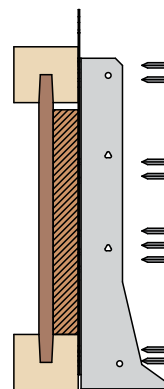

Fill all round and triangular nail holes to header and backer face with 3.4 x 35mm square twist nails.


Stage 3

Option 1

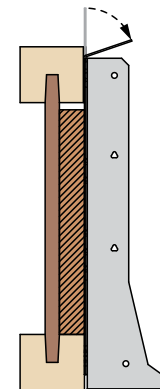

Bend top tab forward and snap off.

Option 2

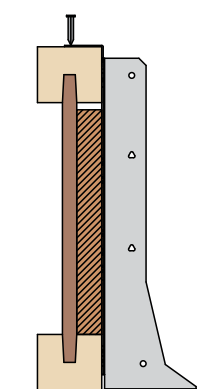

Wipe over top tabs to give a flush fit to the joist.


Nail top tabs into top flange of joist – 1No 3.4 x 35mm square twist nail per tab.

UH (I-Joist Applications)


Universal Hanger

UH/MHE With UZ-Clip Installation (to support 350 – 450mm deep I-Joists)

UH-300 & UZ Clip – For Single Joists

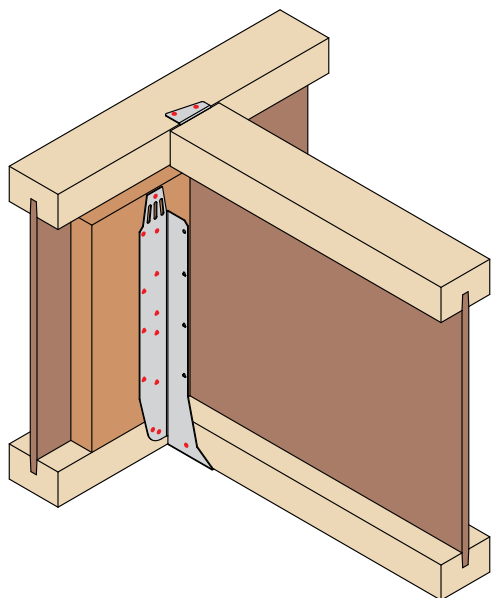

MHE & UZ Clip – For Double Joists

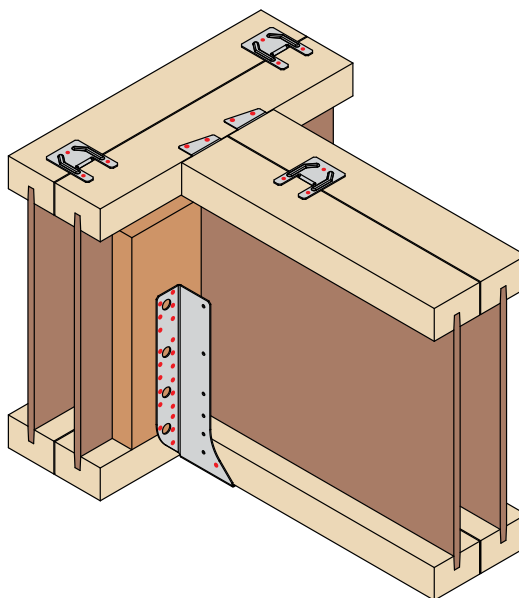

Features & Benefits

- Solution to support 350 – 450mm deep I-Joists with shallower UH/MHE hanger and UZ-Clip to prevent rotation and remove the need for installing time consuming web stiffeners
- Shallower height UH (300mm) and MHE (620) hangers can be used to replace deeper FFI 350, 400 and 450mm deep hangers

Available Sizes

| Joist Depth (mm) | Hanger Width (mm) | | | | | | | |
|------------------|-------------------|-----------|-----------|-----------|-----------|-----------|-----------|------------|
| | 39 | 50 | 61 | 65 | 75 | 78 | 92 | 100 |
| 350 | UH-39-300 | UH-50-300 | UH-61-300 | UH-65-300 | UH-75-300 | UH-78-300 | UH-92-300 | UH-100-300 |
| 400 | UH-39-300 | UH-50-300 | UH-61-300 | UH-65-300 | UH-75-300 | UH-78-300 | UH-92-300 | UH-100-300 |
| 450 | UH-39-300 | UH-50-300 | UH-61-300 | UH-65-300 | UH-75-300 | UH-78-300 | UH-92-300 | UH-100-300 |

| Joist Depth (mm) | Hanger Width (mm) | | | | | | |
|------------------|-------------------|----------------|----------------|----------------|----------------|----------------|----------------|
| | 122 | 130 | 138 | 144 | 150 | 183 | 198 |
| 350 | MHE620-122-249 | MHE620-130-245 | MHE620-138-241 | MHE620-144-238 | MHE620-150-235 | MHE620-183-218 | MHE620-198-211 |
| 400 | MHE620-122-249 | MHE620-130-245 | MHE620-138-241 | MHE620-144-238 | MHE620-150-235 | MHE620-183-218 | MHE620-198-211 |
| 450 | MHE620-122-249 | MHE620-130-245 | MHE620-138-241 | MHE620-144-238 | MHE620-150-235 | MHE620-183-218 | MHE620-198-211 |


| Flange Depth (mm) | UZ-Clip |
|-------------------|---------|
| 36 | UZ-35 |
| 39 | UZ-38 |
| 45 | UZ-45 |
| 47 | UZ-47 |

UZ-Clip size dependent on flange size only and not I-Joist width – 1 No UZ-Clip required per I-Joist (38 – 97mm wide)

UH (I-Joist Applications)

Universal Hanger


UH (300) & UZ-Clip – I-Joist Header with Backer Block or Solid Header

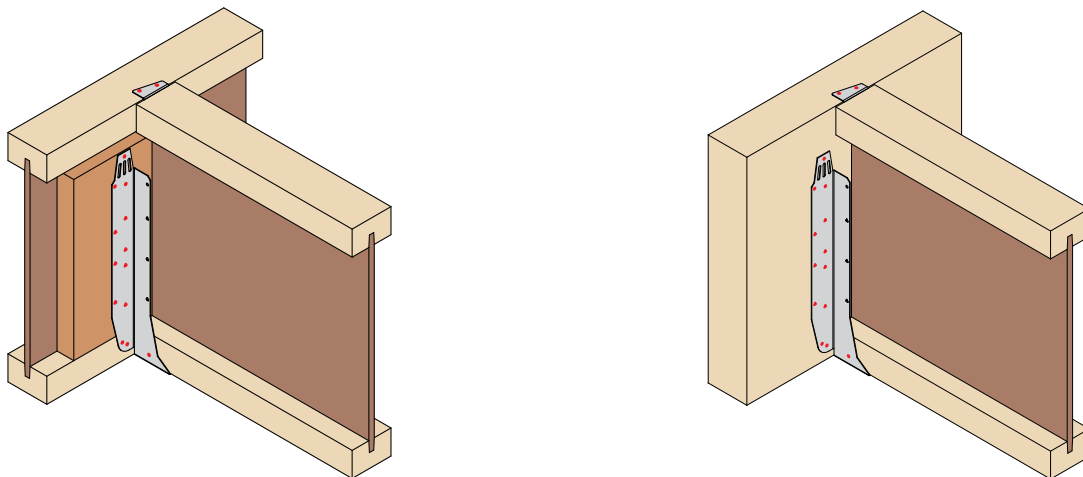

Load Data

| Hanger Width (mm) (Width Dependent Only) | Fixings (3.4 x 35mm) | | | Characteristic Capacity (kN) | |
|---|----------------------|-----|----------|------------------------------|--|
| | Header | | Incoming | Uplift | Header |
| | Face | Top | | | Solid Flange I-Joist, LVL Flange I-Joist |
| 39 – 65 | 24 | 0 | 2 | 2.00 | 12.49 |
| 72 – 100 | 24 | 0 | 2 | 2.00 | 16.90 |

MHE (620) & UZ-Clip – I-Joist Header with Backer Block or Solid Header

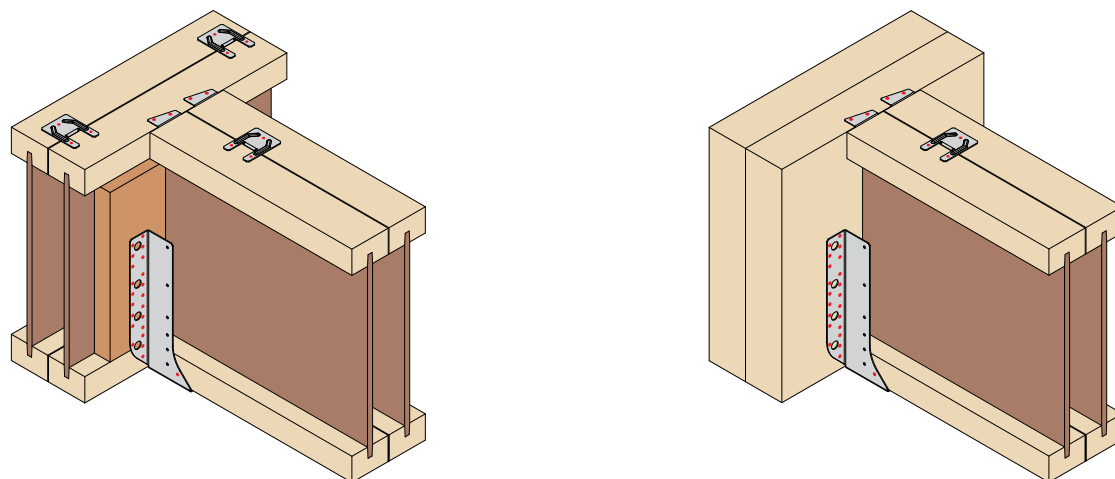

Load Data


| Hanger Width (mm) (Width Dependent Only) | Fixings (3.4 x 35mm) | | | Characteristic Capacity (kN) | |
|---|----------------------|-----|----------|------------------------------|--|
| | Header | | Incoming | Uplift | Header |
| | Face | Top | | | Solid Flange I-Joist, LVL Flange I-Joist |
| 122 – 198 | 24 | 0 | 2 | 2.00 | 30.58 |

UH (I-Joist Applications)

Universal Hanger

UH-300 & UZ-Clip – Installation


Stage 1

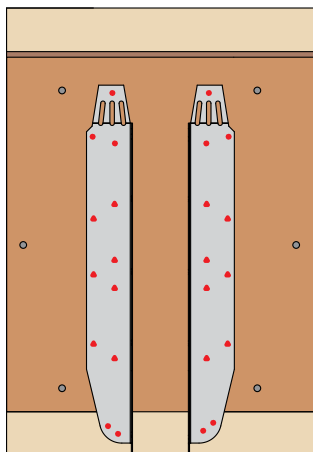

Position hanger against face of I-Joist with locating tab tight to underside of joist.

Backer block installed as per I-Joist manufacturer's guidelines.

Stage 2

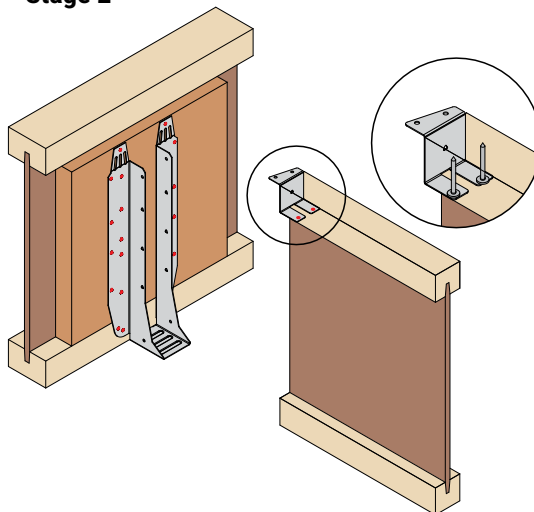


Fix UZ-Clip to top flange of supported member using:

2No 3.4 x 35mm square twist nails.

2No UZ-Clips required for double incoming.


Stage 3

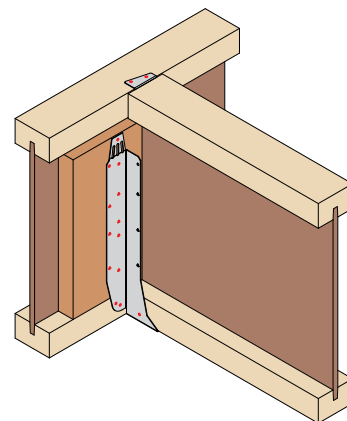

Offer incoming member into the UH hanger and fix to joist bottom flange/backer block and UZ-Clip to header member.

MHE & UZ-Clip – Installation


Stage 1

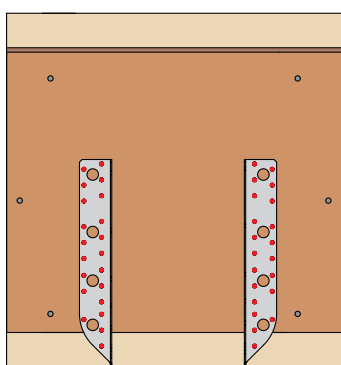

Position hanger against face of I-Joist with locating tab tight to underside of joist.

Backer block installed as per I-Joist manufacturer's guidelines.

Stage 2

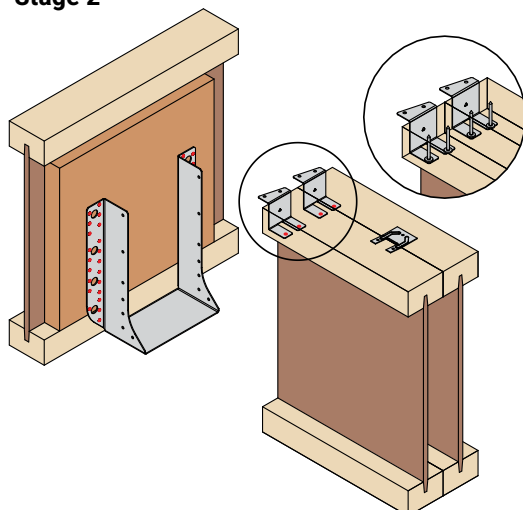


Fix UZ-Clips to top flange of supported member using:

2No 3.4 x 35mm square twist nails per UZ-Clip.

2No UZ-Clips required for double incoming.

Stage 3

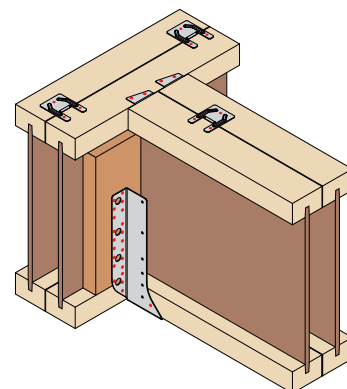


Offer incoming member into the MHE hanger and fix to joist bottom flange/backer block and UZ-Clip to header member.



UH (Open Web Applications)

Universal Hanger

GB Patent 2497747

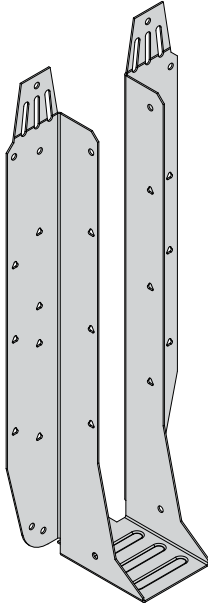

The UH hanger is designed for any joist to joist, joist to trimmer or joist to steel application.

Features & Benefits

- Elongated slots and unique snap off feature allows for height adjustment and face fix only option
- One hanger solution for backer and backerless I-Joists
- Rear location tab to assist with installation
- Additional triangular fixing holes for increased performance on solid members
- Suitable for connections to steel work – see pages 77 – 79

Material Specification

- Galvanised mild steel – Z275

Fixings


| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi (or 3.5 x 30mm wood screw for sacrificial stairwell installation only)


Available Sizes

| Hanger Width (W) (mm) | 220 | 235 | 300 | >300 |
|-----------------------|------------|------------|------------|-------------------------|
| 39 | UH-39-220 | UH-39-235 | UH-39-300 | SEE HUH (PAGES 67 – 73) |
| 50 | UH-50-220 | UH-50-235 | UH-50-300 | |
| 75 | UH-75-220 | UH-75-235 | UH-75-300 | |
| 78 | UH-78-220 | UH-78-235 | UH-78-300 | |
| 92 | UH-92-220 | UH-92-235 | UH-92-300 | |
| 100 | UH-100-220 | UH-100-235 | UH-100-300 | |
| >100 | | | | |

Dimensions (mm)

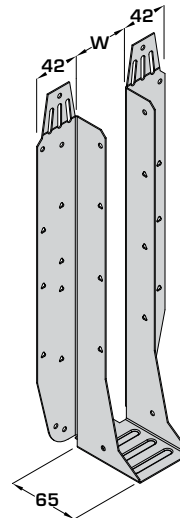


Height Suitability

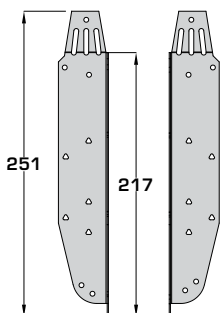


UH-220

(To suit 219 & 225mm deep open web joists)

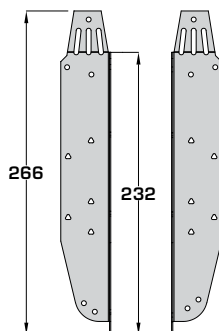

UH-235

(To suit 253 – 254mm deep open web joists)

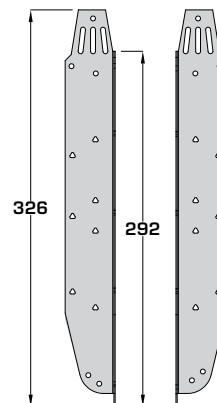


UH-300

(To suit 304mm deep open web joists)

UH (Open Web Applications)

Universal Hanger

Standard Installation – Open Web Header

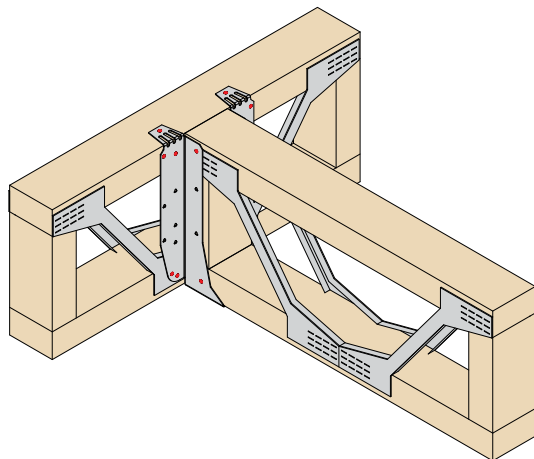

See Page 64 For Installation Instructions


- Fill all red holes as indicated for this installation
- No backer block/plywood gusset required
- Top tabs to be wiped over and nailed
- Additional triangular holes into face only required for solid headers

Additional triangular holes into incoming joist only required for enhanced uplift.
(for details see page 61)

Load Data

| Hanger Depth (mm) | Fixings (3.4 x 35mm) | | | Characteristic Capacity (kN) | |
|-------------------|----------------------|-----|----------|------------------------------|-----------------|
| | Header | | Incoming | Uplift | Open Web Header |
| (Depth Dependent) | Face | Top | | | |
| 220 | 8 | 2 | 4 | 3.97 | 14.19 |
| 235 | 8 | 2 | 4 | 3.97 | 13.23 |
| 300 | 8 | 2 | 4 | 3.97 | 13.64 |

Enhanced Installation – Solid Header

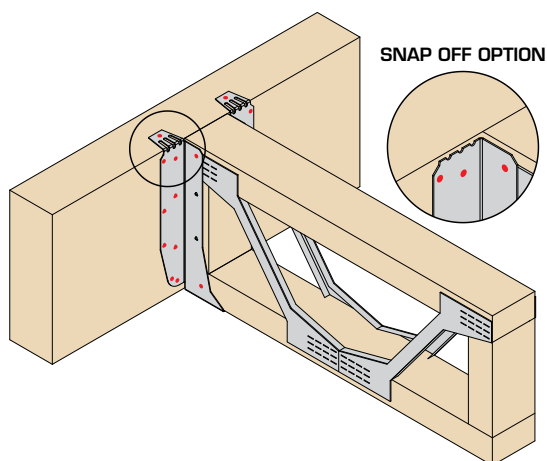

See Page 64 For Installation Instructions

- Fill all red holes as indicated for this installation
- All nail holes filled into solid header (including triangular)
- Top tabs to be wiped over and nailed or snapped off to give face fix only option

Additional triangular holes into incoming joist only required for enhanced uplift.
(for details see page 61)

Load Data


| Hanger Depth (mm) | Fixings (3.4 x 35mm) | | | Characteristic Capacity (kN) | | |
|-------------------|----------------------|---------|----------|------------------------------|-------------------|-------|
| | Header | | Incoming | Uplift | Solid Header | |
| (Depth Dependent) | Face | Top | | | GL (Min GL28h) | LVL |
| 220 | 18 | 2 (0**) | 4 | 3.97 | 19.69 | 18.65 |
| 235 | 18 | 2 (0**) | 4 | 3.97 | 22.16 | 21.58 |
| 300 | 22 | 2 (0**) | 4 | 3.97 | 22.16 | 22.17 |

**No fixings required when using snap off option

UH (Open Web Applications)

Universal Hanger

Enhanced Installation – Open Web Header with Plywood Gusset

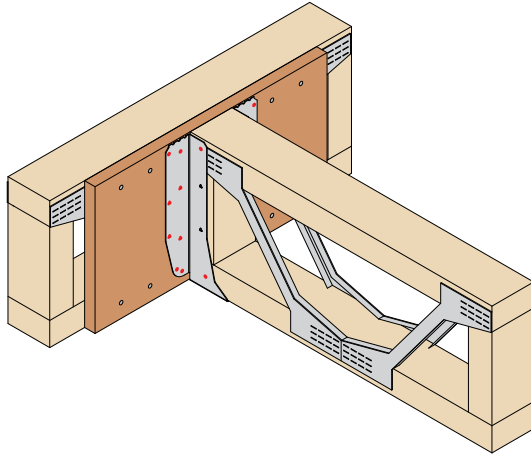

See Page 65 For Installation Instructions


- Fill all red holes as indicated for this installation
- 18mm plywood gusset should be screwed into open web header with the appropriate screws – see installation instructions for more information
- All nail holes filled into plywood gusset (including triangular)
- Top tabs snapped off to give face fix only fixing

Additional triangular holes into incoming joist only required for enhanced uplift.
(for details see below)

Load Data

| Hanger Depth (mm) (Depth Dependent) | Fixings (3.4 x 35mm) | | | Characteristic Capacity (kN) | |
|--|----------------------|-----|----------|------------------------------|------------------------|
| | Header | | Incoming | Uplift | Open Web Header / 18mm |
| | Face | Top | | | |
| 220 | 18 | 0 | 4 | 3.97 | 19.69 |
| 235 | 18 | 0 | 4 | 3.97 | 22.16 |
| 300 | 22 | 0 | 4 | 3.97 | 22.16 |


Enhanced Uplift

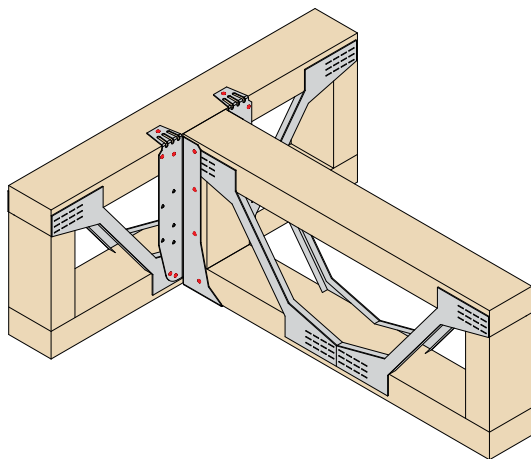

- Fill all red holes as indicated for this installation
- Fixings into the incoming joist are required to resist uplift
- Increased uplift figures can be achieved by nailing the additional triangular nail holes into the incoming member – solid incoming or web stiffeners are required

Load Data

| Hanger Depth (mm) | Fixings (3.4 x 35mm) | Characteristic Capacity (kN) |
|-------------------|----------------------|------------------------------|
| (Depth Dependent) | Incoming | Uplift |
| 220 – 300 | 8 | 7.97 |

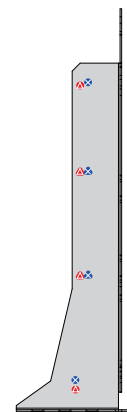

220 – 300MM



Near side




Far side

UH (Open Web Applications)


Universal Hanger

Sacrificial Stairwell Installation

Face Fix Option

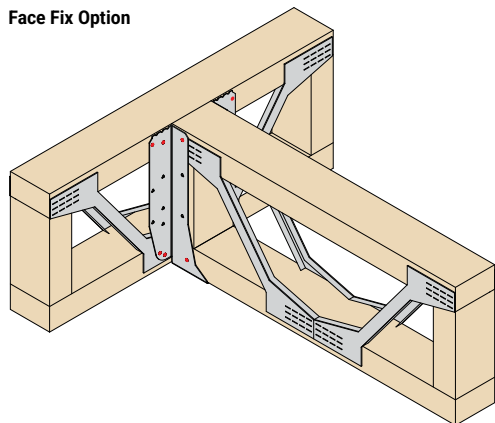

Top Fix Option

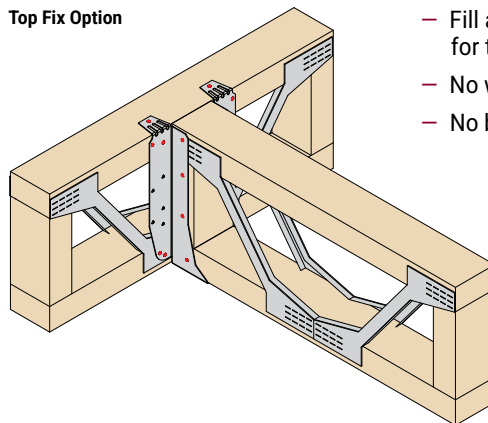

- Fill all red holes as indicated for this installation
- No web stiffeners required
- No backer blocks required

Load Data


| Hanger Depth (mm) | Fixings (3.4 x 35mm) | | | Characteristic Capacity (kN) | |
|-------------------|----------------------|---------|----------|------------------------------|-----------------|
| | Header | | Incoming | Uplift | Open Web Header |
| (Depth Dependent) | Face | Top | | | |
| 220 | 8 | 2 (0**) | 4 | 3.97 | 7.43 |
| 235 | 8 | 2 (0**) | 4 | 3.97 | 7.43 |
| 300 | 8 | 2 (0**) | 4 | 3.97 | 7.43 |

**No fixings required when using snap off option

3.5 x 30mm multi-purpose wood screws may be used as an alternative fixing for temporary supporting hanger.


Installation Instructions

Face Fix Option

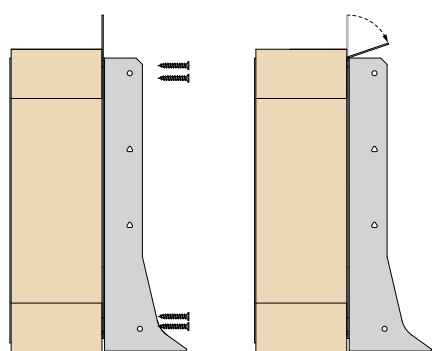

Face fix to top and bottom chords using 8No screws or nails.
Bend tabs forward and snap off.
Once ready for stairs to be installed the deck can be cut and joists/hangers removed.

Top Fix Option

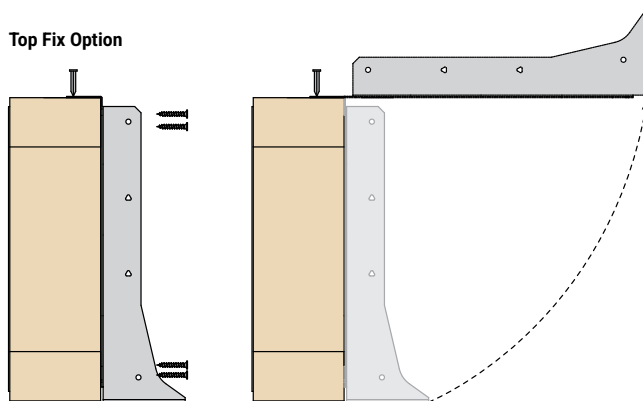


Face fix to top and bottom chords using 8No screws or nails.
Bend top tabs over joist top flange and nail using 1No fixing per leg.
Once ready for stairs to be installed the deck can be cut and joists/hangers removed.
Hanger to be rotated through 90° to snap off at break line.

UH (Open Web Applications)

Universal Hanger


Standard Installation Instructions – Open Web Header

Stage 1

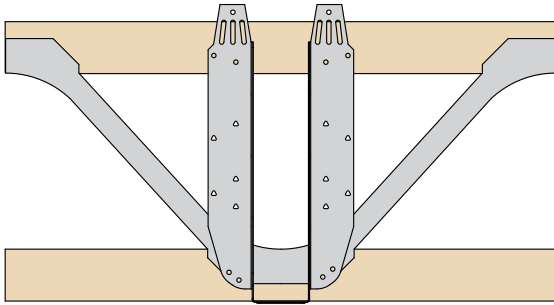


Position hanger against face of open web joist with locating tab tight to underside of joist.

Stage 2

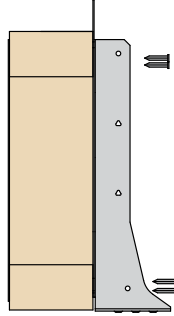


Face nail to top and bottom chords using 8No 3.4 x 35mm square twist nails in total.

Stage 3

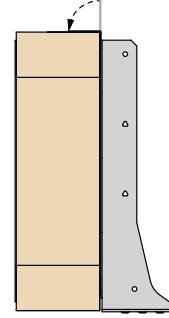

Wipe over top tabs to give a flush fit to the joist.


Stage 4

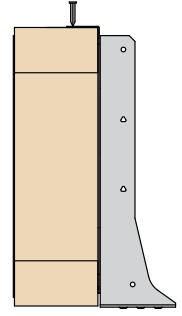

Nail top tabs into top chord of joist – 1No 3.4 x 35mm square twist nail per tab.


Enhanced Installation Instructions – Solid Header

Stage 1

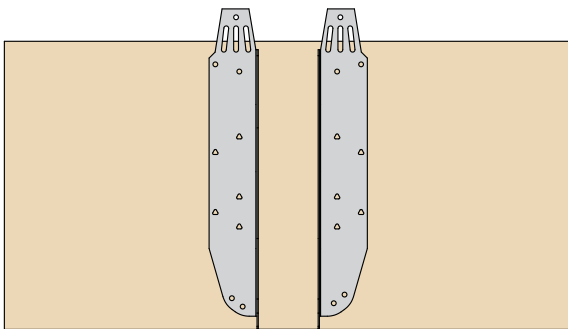

Position hanger against face of joist with locating tab tight to underside of joist.


Stage 2

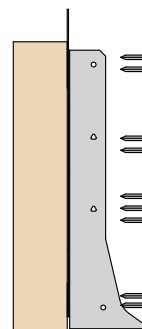

Fill all round and triangular nail holes to header with 3.4 x 35mm square twist nails.


Stage 3

Option 1

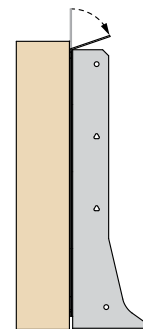

Bend top tab forward and snap off.

Option 2

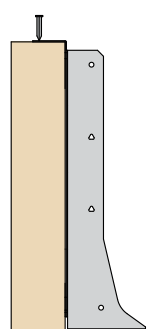

Wipe over top tabs to give a flush fit to the joist.


Nail top tabs into top chord of joist – 1No 3.4 x 35mm square twist nail per tab.

UH (Open Web Applications)

Universal Hanger

Open Web Header With Plywood Gusset Instructions

Stage 1

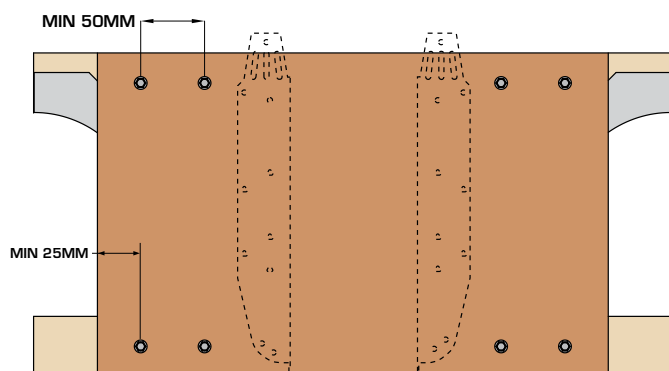


18mm plywood should be fixed to the face of the open web joist with 4No PSTS 6.5mm into the top chord and 4No PSTS 6.5mm into the bottom chord.

Plywood should be the full depth of the open web and of a width to give the screws the appropriate edge distance.


Paslode Structural Timber Screws should be used to fix the plywood to the open web joist. The screw length is dependant on the joist thickness.

Stage 3

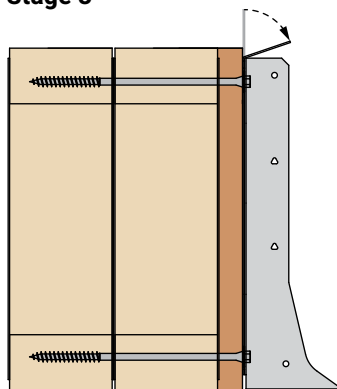

Bend top tabs forward and snap off.

Stage 2

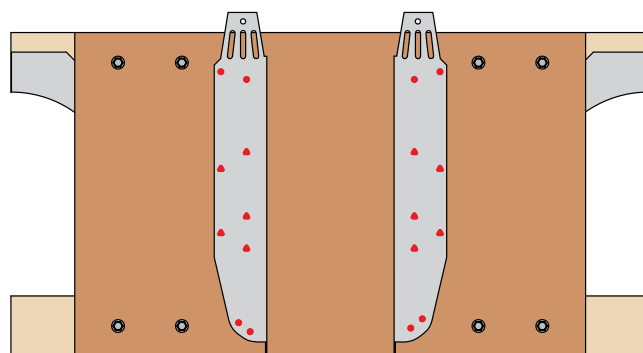

Position hanger flush with underside of joist.

Circular nail holes filled from bottom to top ensuring hanger side flanges are plumb.

All fixings are 3.4 x 35mm square twist nails.

Optional triangular nail holes should also be filled.



Fixings may clash with metalweb behind and this installation may only be suitable for PPN installation only.


Screw Specification

| Header Joist Thickness | Fixing Ref | Product Code | Box Qty |
|------------------------|-------------|--------------|---------|
| Single 72mm | PSTS6.5X65 | 551105 | 100 |
| Single 97mm | PSTS6.5X100 | 551106 | 100 |
| Single 122mm | PSTS6.5X100 | 551106 | 100 |
| Single 147mm | PSTS6.5X115 | 551102 | 100 |
| Double 72mm | PSTS6.5X150 | 551107 | 100 |
| Double 97mm | PSTS6.5X200 | 551108 | 100 |
| Double 122mm | PSTS6.5X200 | 551108 | 100 |
| Double 147mm | PSTS6.5X250 | 551109 | 100 |




HUH (I-Joist Applications)

Heavy Universal Hanger

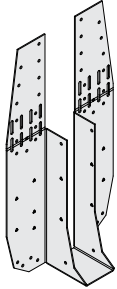

NEW 220-235MM DEEP MERGED PART

- Streamlined range
- From 43 to 22 parts
- Removal of outer bend with no reduced performance

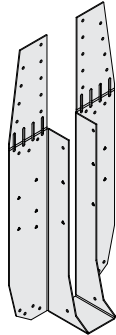

NEW 300MM DEEP DESIGN

- Removal of outer bend with no reduced performance



The HUH hanger is designed for any joist to joist, joist to trimmer or joist to steel application in high load applications.

Features & Benefits

- Elongated slots for height adjustment
- One hanger solution for backer and backerless I-Joists
- Additional triangular fixing holes for increased performance on solid members
- Suitable for connections to steel work – see pages 77 – 79

Material Specification

- Galvanised mild steel – Z275

Fixings


| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi


Available Sizes

| Hanger Width (mm) | Hanger Depth (mm) | | | | | |
|-------------------|-------------------|-----------------|-------------|-------------|-------------|-------------|
| | 195 | 220-235 | 300 | 350 | 375 | 400 |
| 39 | – | HUH-39-220-235 | HUH-39-300 | – | – | – |
| 50 | – | HUH-50-220-235 | HUH-50-300 | HUH-50-350 | HUH-50-375 | HUH-50-400 |
| 61 | – | HUH-61-220-235 | HUH-61-300 | – | – | – |
| 65 | – | HUH-65-220-235 | HUH-65-300 | – | – | – |
| 75 | – | HUH-75-220-235 | HUH-75-300 | HUH-75-350 | HUH-75-375 | HUH-75-400 |
| 78 | – | HUH-78-220-235 | HUH-78-300 | – | – | – |
| 92 | – | HUH-92-220-235 | HUH-92-300 | HUH-92-350 | – | HUH-92-400 |
| 100 | – | HUH-100-220-235 | HUH-100-300 | HUH-100-350 | HUH-100-375 | HUH-100-400 |
| 110 | – | HUH-110-220-235 | HUH-110-300 | – | – | – |
| 122 | – | HUH-122-220-235 | HUH-122-300 | – | – | – |
| 125 | – | HUH-125-220-235 | HUH-125-300 | – | HUH-125-375 | HUH-125-400 |
| 130 | – | HUH-130-220-235 | HUH-130-300 | – | – | – |
| 138 | – | HUH-138-220-235 | HUH-138-300 | – | – | – |
| 144 | – | HUH-144-220-235 | HUH-144-300 | – | – | – |
| 150 | HUH-150-195 | HUH-150-220-235 | HUH-150-300 | HUH-150-350 | HUH-150-375 | HUH-150-400 |
| 183 | – | HUH-183-220-235 | HUH-183-300 | – | – | – |
| 198 | HUH-198-195 | HUH-198-220-235 | HUH-198-300 | – | HUH-198-375 | HUH-198-400 |
| 225 | – | – | – | – | – | – |
| 250 | – | HUH-250-220-235 | HUH-250-300 | – | – | – |
| 300 | – | HUH-300-220-235 | HUH-300-300 | – | – | – |

Dimensions (mm)

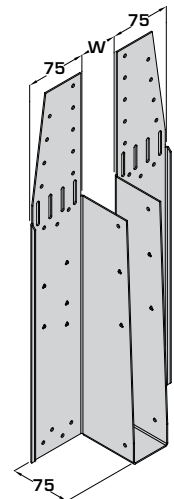


Height Suitability




HUH-195

(To suit 195 – 200mm deep I-joists)

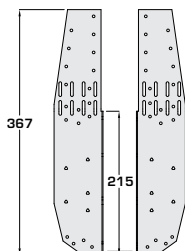


HUH-220-235

(To suit 220-245mm deep I-joists)

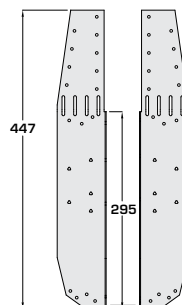


HUH-300

(To suit 300 – 302mm deep I-joists)

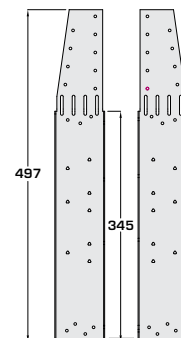

HUH-350

(To suit 350 – 360mm deep I-joists)

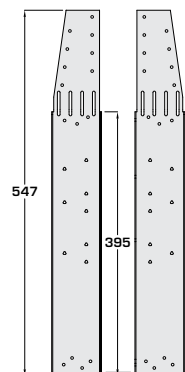


HUH-400

(To suit 400 – 406mm deep I-joists)

HUH (I-Joist Applications)

Heavy Universal Hanger

Standard Installation – I-Joist Header without Backer Block

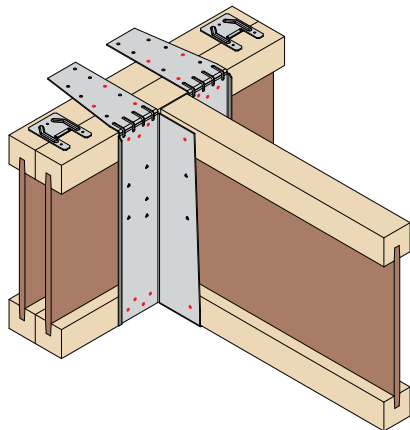

See Page 69 For Installation Instructions


- Fill all red holes as indicated for this installation
- No backer block required
- No web stiffeners required*
- Top tabs to be wiped over and nailed
- Min 2 No fixings into rear ply and 1 No fixing into front ply per leg for double headers
- Additional triangular holes into face only required for solid headers

*Additional triangular holes into incoming joist only required for enhanced uplift.
(for details see page 67)

Load Data

| Joist Depth (mm) | Hanger Depth (mm) | Fixings (3.4 x 35mm) | | | Characteristic Capacity (kN) | | |
|------------------|-------------------|----------------------|-----|----------|------------------------------|----------------|------------|
| | | Header | | Incoming | Uplift | I-Joist Header | |
| | | Face | Top | | | Solid Flange | LVL Flange |
| 195-200 | 195 | 14 | 6 | 4 | 3.97 | 17.30 | 17.83 |
| 220 | 220-235 | 14 | 6 | 4 | 3.97 | 17.30 | 17.83 |
| 235-245 | 220-235 | 14 | 6 | 4 | 3.97 | 18.50 | 18.50 |
| 300 | 300 | 14 | 6 | 4 | 3.97 | 18.50 | 18.50 |
| 350-360 | 350 | 14 | 6 | 4 | 3.97 | 15.50 | 16.15 |
| 400 | 400 | 14 | 6 | 4 | 3.97 | 15.50 | 16.15 |

Enhanced Installation – I-Joist Header with Backer Block

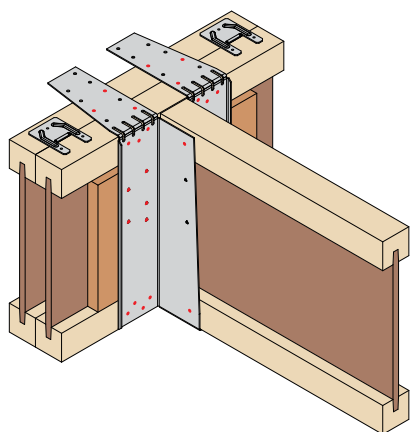

See Page 69 For Installation Instructions

- Fill all red holes as indicated for this installation
- All nail holes filled into backer block (including triangular)
- Backer block required to hanger side only (follow I-joist manufacturer's guidelines)
- Min 2 No fixings into rear ply and 1 No fixing into front ply per leg for double headers
- No web stiffeners required when using same hanger/joist depth*

*Additional triangular holes into incoming joist only required for enhanced uplift.
(for details see page 67)


Load Data

| Joist Depth (mm) | Hanger Depth (mm) | Fixings (3.4 x 35mm) | | | Characteristic Capacity (kN) | | |
|------------------|-------------------|----------------------|-----|----------|------------------------------|----------------|------------|
| | | Header | | Incoming | Uplift | I-Joist Header | |
| | | Face | Top | | | Solid Flange | LVL Flange |
| 195-200 | 195 | 20 | 6 | 4 | 3.97 | 28.50 | 28.50 |
| 220 | 220-235 | 24 | 6 | 4 | 3.97 | 28.50 | 28.50 |
| 235-245 | 220-235 | 24 | 6 | 4 | 3.97 | 28.50 | 28.50 |
| 300 | 300 | 24 | 6 | 4 | 3.97 | 28.50 | 28.50 |
| 350-360 | 350 | 30 | 6 | 4 | 3.97 | 28.50 | 28.50 |
| 400 | 400 | 30 | 6 | 4 | 3.97 | 28.50 | 28.50 |

HUH (I-Joist Applications)

Heavy Universal Hanger

Enhanced Installation – Solid Header

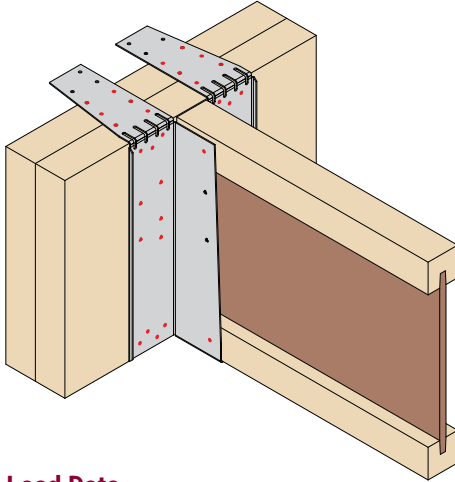


- Fill all red holes as indicated for this installation
- All nail holes filled into solid header (including triangular)
- No web stiffeners required when using same hanger/joist depth*
- Top tabs to be wiped over and nailed
- Min 2 No fixings into rear ply and 1 No fixing into front ply per leg for double headers

*Additional triangular holes into incoming joist only required for enhanced uplift.
(for details see below)

Load Data

| Joist Depth (mm) | Hanger Depth (mm) | Fixings (3.4 x 35mm) | | | Characteristic Capacity (kN) | | |
|------------------|-------------------|----------------------|-----|----------|------------------------------|----------------|-------|
| | | Header | | Incoming | Uplift | Solid Header | |
| | | Face | Top | | | GL (Min GL28h) | LVL |
| 195-200 | 195 | 20 | 6 | 4 | 3.97 | 29.50 | 29.50 |
| 220 | 220-235 | 24 | 6 | 4 | 3.97 | 29.50 | 29.50 |
| 235-245 | 220-235 | 24 | 6 | 4 | 3.97 | 29.50 | 29.50 |
| 300 | 300 | 24 | 6 | 4 | 3.97 | 29.50 | 29.50 |
| 350-360 | 350 | 30 | 6 | 4 | 3.97 | 29.50 | 29.50 |
| 400 | 400 | 30 | 6 | 4 | 3.97 | 29.50 | 29.50 |


Enhanced Uplift

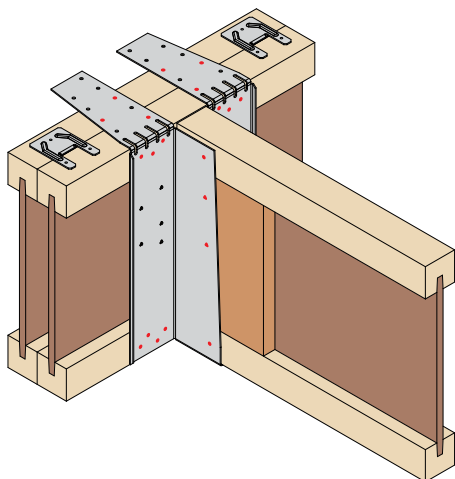

- Fill all red holes as indicated for this installation
- Fixings into the incoming joist are required to resist uplift
- Increased uplift figures can be achieved by nailing the additional triangular nail holes into the incoming member – solid incoming or web stiffeners are required

Load Data

| Hanger Depth (mm) | Fixings (3.4 x 35mm) | Characteristic Capacity (kN) |
|------------------------|----------------------|------------------------------|
| (Depth Dependent Only) | Incoming | Uplift |
| 195 – 400 | 8 | 7.97 |



195 – 400MM

▲ Near side


✕ Far side

HUH (I-Joist Applications)

Heavy Universal Hanger


Standard Installation Instructions – I-Joist Header without Backer Block

Stage 1

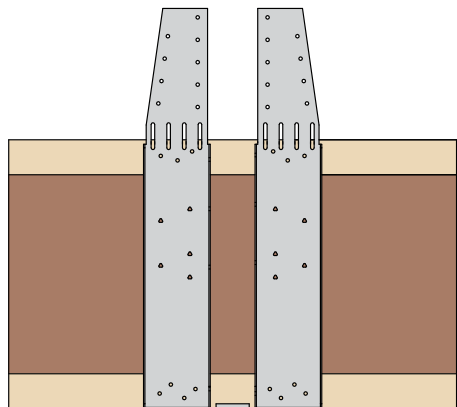


Position hanger flush with underside of joist.

Stage 2

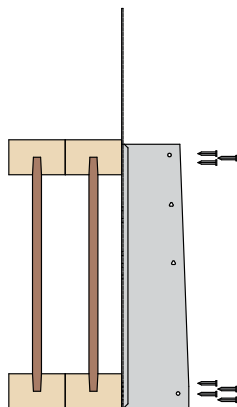


Face nail to top and bottom flanges using 14No 3.4 x 35mm square twist nails in total.

Stage 3

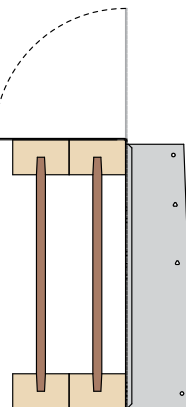

Wipe over top tabs to give a flush fit to the joist.


Stage 4

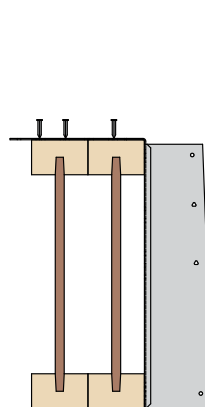

Nail top tabs into top flange of joist – Min 2No 3.4 x 35mm square twist nails into rear ply and 1No 3.4 x 35mm square twist nail into front ply per leg.

Enhanced Installation Instructions – I-Joist Header with Backer Block


Stage 1

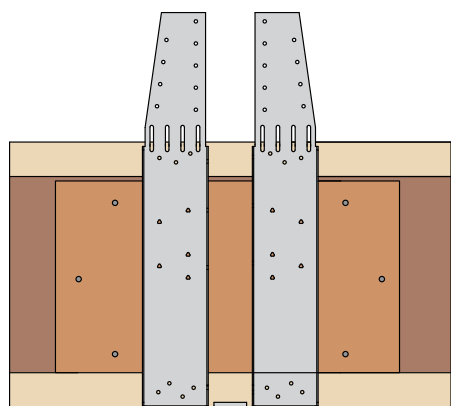

Position hanger flush with underside of joist.


Backer block installed as per I-Joist manufacturer's guidelines.

Stage 2

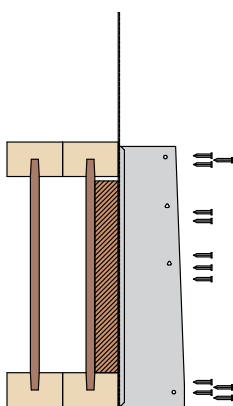


Fill all round and triangular nail holes to header and backer face with 3.4 x 35mm square twist nails.

Stage 3

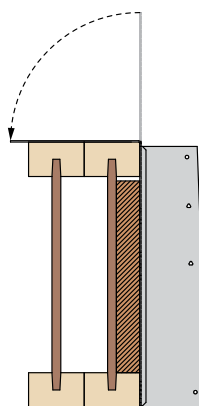

Wipe over top tabs to give a flush fit to the joist.

Stage 4

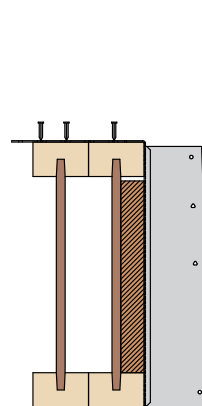


Nail top tabs into top flange of joist – Min 2No 3.4 x 35mm square twist nails into rear ply and 1No 3.4 x 35mm square twist nail into front ply per leg.



HUH (Open Web Applications)

Heavy Universal Hanger

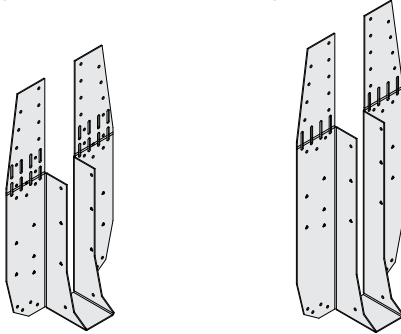

The HUH hanger is designed for any joist to joist, joist to trimmer or joist to steel application in high load applications.

Features & Benefits

- Elongated slots for height adjustment
- No need for plywood gussets or backer blocks
- Additional triangular fixing holes for increased performance on solid members
- Suitable for connections to steel work – see pages 77 – 79

Material Specification

- Galvanised mild steel – Z275

Fixings

| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi

NEW 220-235MM DEEP MERGED PART

- Streamlined range
- From 43 to 22 parts
- Removal of outer bend with no reduced performance


NEW 300MM DEEP DESIGN

- Removal of outer bend with no reduced performance


Available Sizes

| Hanger Width (W) (mm) | Hanger Depth (mm) | | | | | |
|--------------------------|-------------------|-----------------|-------------|-------------|-------------|-------------|
| | 195 | 220-235 | 300 | 350 | 375 | 400 |
| 39 | – | HUH-39-220-235 | HUH-39-300 | – | – | – |
| 50 | – | HUH-50-220-235 | HUH-50-300 | HUH-50-350 | HUH-50-375 | HUH-50-400 |
| 61 | – | HUH-61-220-235 | HUH-61-300 | – | – | – |
| 65 | – | HUH-65-220-235 | HUH-65-300 | – | – | – |
| 75 | – | HUH-75-220-235 | HUH-75-300 | HUH-75-350 | HUH-75-375 | HUH-75-400 |
| 78 | – | HUH-78-220-235 | HUH-78-300 | – | – | – |
| 92 | – | HUH-92-220-235 | HUH-92-300 | HUH-92-350 | – | HUH-92-400 |
| 100 | – | HUH-100-220-235 | HUH-100-300 | HUH-100-350 | HUH-100-375 | HUH-100-400 |
| 110 | – | HUH-110-220-235 | HUH-110-300 | – | – | – |
| 122 | – | HUH-122-220-235 | HUH-122-300 | – | – | – |
| 125 | – | HUH-125-220-235 | HUH-125-300 | – | HUH-125-375 | HUH-125-400 |
| 130 | – | HUH-130-220-235 | HUH-130-300 | – | – | – |
| 138 | – | HUH-138-220-235 | HUH-138-300 | – | – | – |
| 144 | – | HUH-144-220-235 | HUH-144-300 | – | – | – |
| 150 | HUH-150-195 | HUH-150-220-235 | HUH-150-300 | HUH-150-350 | HUH-150-375 | HUH-150-400 |
| 183 | – | HUH-183-220-235 | HUH-183-300 | – | – | – |
| 198 | HUH-198-195 | HUH-198-220-235 | HUH-198-300 | – | HUH-198-375 | HUH-198-400 |
| 225 | – | – | – | – | – | – |
| 250 | – | HUH-250-220-235 | HUH-250-300 | – | – | – |
| 300 | – | HUH-300-220-235 | HUH-300-300 | – | – | – |

Dimensions (mm)

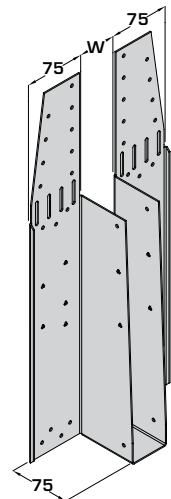


Height Suitability




HUH-195

(To suit 195 – 202mm deep open web joists)

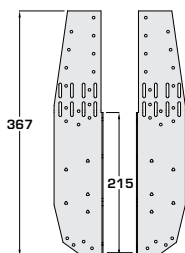


HUH-220-235

(To suit 219 – 254mm deep open web joists)

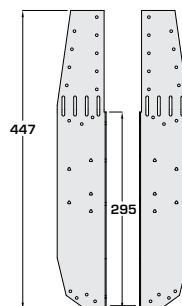


HUH-300

(To suit 304mm deep open web joists)

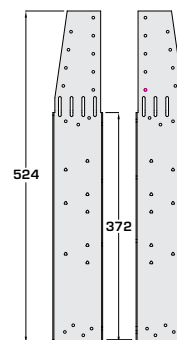

HUH-375

(To suit 373 – 375mm deep open web joists)

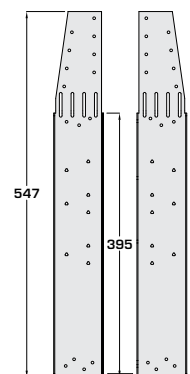


HUH-400

(To suit 417 – 424mm deep open web joists)

HUH (Open Web Applications)

Heavy Universal Hanger

Standard Installation – Open Web Header

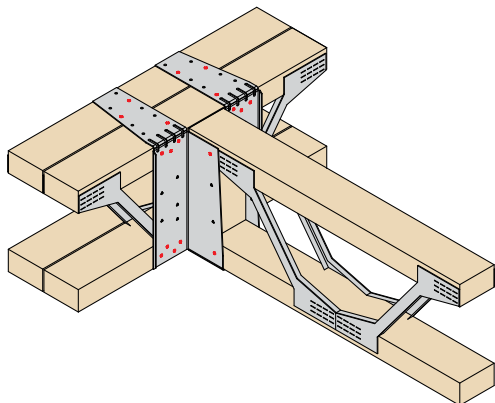

See Page 74 For Installation Instructions


- Fill all red holes as indicated for this installation
- No backer block/plywood gusset required
- Top tabs to be wiped over and nailed
- Min 2 No fixings into rear ply and 1 No fixing into front ply per leg for double headers
- Additional triangular holes into face only required for solid headers

Additional triangular holes into incoming joist only required for enhanced uplift.
(for details see page 72)

Load Data

| Joist Depth (mm) | Hanger Depth (mm) | Fixings (3.4 x 35mm) | | | Characteristic Capacity (kN) | |
|------------------|-------------------|----------------------|-----|----------|------------------------------|-----------------|
| | | Header | | Incoming | Uplift | Open Web Header |
| | | Face | Top | | | |
| 195-207 | 195 | 14 | 6 | 4 | 3.97 | 13.95 |
| 219-225 | 220-235 | 14 | 6 | 4 | 3.97 | 13.95 |
| 250-254 | 220-235 | 14 | 6 | 4 | 3.97 | 18.60 |
| 300-304 | 300 | 14 | 6 | 4 | 3.97 | 18.60 |
| 373-380 | 375 | 14 | 6 | 4 | 3.97 | 18.60 |
| 400-424 | 400 | 14 | 6 | 4 | 3.97 | 18.60 |

Standard Installation With Blocking – Open Web Header

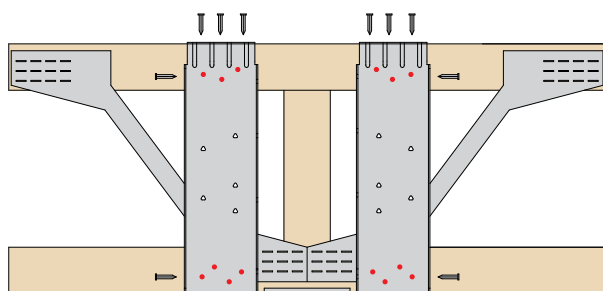

See Page 75 For Installation Instructions

- Fill all red holes as indicated for this installation
- Blocking piece required within joist, centred on hanger and minimum 47 x 72mm
- No backer block/plywood gusset required
- Top tabs to be wiped over and nailed
- Min 2 No fixings into rear ply and 1 No fixing into front ply per leg for double headers

Additional triangular holes into incoming joist only required for enhanced uplift.
(for details see page 72)


Load Data

| Joist Depth (mm) | Hanger Depth (mm) | Fixings (3.4 x 35mm) | | | Characteristic Capacity (kN) | |
|------------------|-------------------|----------------------|-----|----------|------------------------------|-------------------------------|
| | | Header | | Incoming | Uplift | Open Web Header With Blocking |
| | | Face | Top | | | |
| 195-207 | 195 | 14 | 6 | 4 | 3.97 | 24.00 |
| 219-225 | 220-235 | 14 | 6 | 4 | 3.97 | 24.00 |
| 250-254 | 220-235 | 14 | 6 | 4 | 3.97 | 24.00 |
| 300-304 | 300 | 14 | 6 | 4 | 3.97 | 24.00 |
| 373-380 | 375 | 14 | 6 | 4 | 3.97 | 24.00 |
| 400-424 | 400 | 14 | 6 | 4 | 3.97 | 24.00 |

HUH (Open Web Applications)

Heavy Universal Hanger

Enhanced Installation – Solid Header

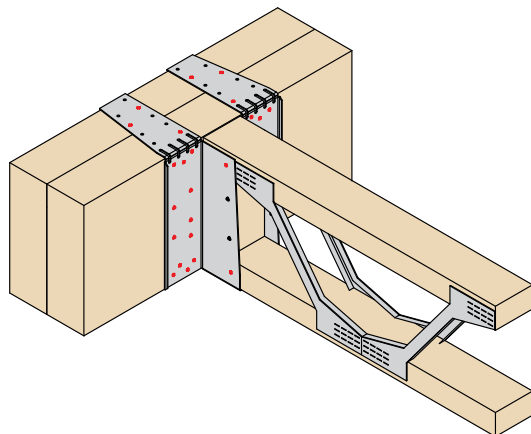

See Page 74 For Installation Instructions


- Fill all red holes as indicated for this installation
- All nail holes filled into solid header (including triangular)
- Top tabs to be wiped over and nailed
- Min 2No fixings into rear ply and 1No fixing into front ply per leg for double headers

Additional triangular holes into incoming joist only required for enhanced uplift.
(for details see page 72)

Load Data

| Joist Depth (mm) | Hanger Depth (mm) | Fixings (3.4 x 35mm) | | | Characteristic Capacity (kN) | | |
|------------------|-------------------|----------------------|-----|----------|------------------------------|----------------|-------|
| | | Header | | Incoming | Uplift | Solid Header | |
| | | Face | Top | | | GL (Min GL28h) | LVL |
| 195-207 | 195 | 20 | 6 | 4 | 3.97 | 29.50 | 29.50 |
| 219-225 | 220-235 | 24 | 6 | 4 | 3.97 | 29.50 | 29.50 |
| 250-254 | 220-235 | 24 | 6 | 4 | 3.97 | 29.50 | 29.50 |
| 300-304 | 300 | 24 | 6 | 4 | 3.97 | 29.50 | 29.50 |
| 373-380 | 375 | 30 | 6 | 4 | 3.97 | 29.50 | 29.50 |
| 400-424 | 400 | 30 | 6 | 4 | 3.97 | 29.50 | 29.50 |

Enhanced Installation – Open Web Header With Plywood Gusset

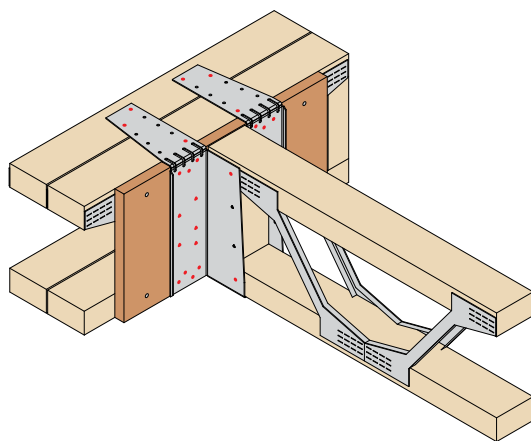

See Page 76 For Installation Instructions

- Fill all red holes as indicated for this installation
- 18mm plywood gusset should be screwed into open web header with the appropriate screws – see installation instructions for more information
- All nail holes filled into plywood gusset (including triangular)
- Top tabs to be wiped over and nailed
- Min 2No fixings into rear ply and 1No fixing into front ply per leg for double headers

Additional triangular holes into incoming joist only required for enhanced uplift.
(for details see page 72)



Load Data

| Joist Depth (mm) | Hanger Depth (mm) | Fixings (3.4 x 35mm) | | | Characteristic Capacity (kN) | |
|------------------|-------------------|----------------------|-----|----------|------------------------------|---------------------------------------|
| | | Header | | Incoming | Uplift | Open Web Header / 18mm Plywood Gusset |
| | | Face | Top | | | |
| 195-207 | 195 | 20 | 6 | 4 | 3.97 | 29.50 |
| 219-225 | 220-235 | 24 | 6 | 4 | 3.97 | 29.50 |
| 250-254 | 220-235 | 24 | 6 | 4 | 3.97 | 29.50 |
| 300-304 | 300 | 24 | 6 | 4 | 3.97 | 29.50 |
| 373-380 | 375 | 30 | 6 | 4 | 3.97 | 29.50 |
| 400-424 | 400 | 30 | 6 | 4 | 3.97 | 29.50 |

HUH (Open Web Applications)

Heavy Universal Hanger

Enhanced Uplift

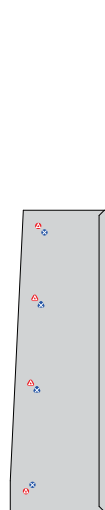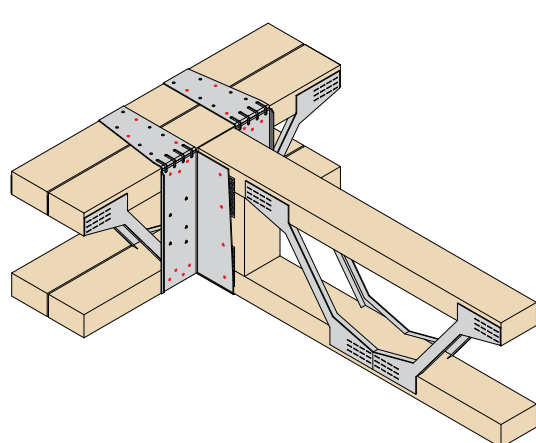


195 – 400MM

- Fill all red holes as indicated for this installation
- Fixings into the incoming joist are required to resist uplift
- Increased uplift figures can be achieved by nailing the additional triangular nail holes into the incoming member – solid incoming or full width vertical required


▲ Near side

● Far side

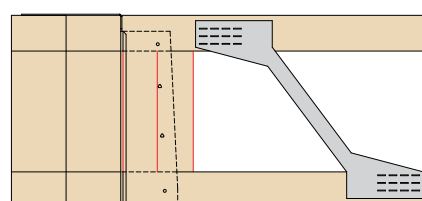

Hanger side flanges/plates omitted for clarity

2 No end verticals required to achieve full uplift capacity.

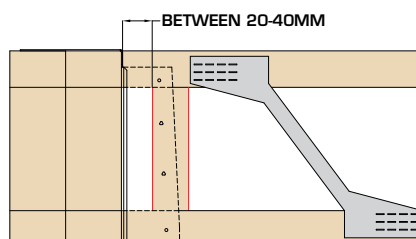


Hanger side flanges/plates omitted for clarity

Single end verticals can be used if the gap between the back of the hanger and the vertical is between 20 – 40mm.



Incorrect Installation

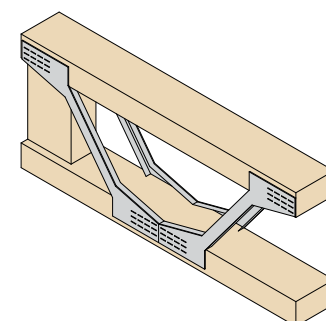

Do not use HUH for enhanced uplift when using trimmable ends

Load Data


| Hanger Depth (mm) | Fixings (3.4 x 35mm) | Characteristic Capacity (kN) |
|------------------------|----------------------|------------------------------|
| (Depth Dependent Only) | Incoming | Uplift |
| 195 – 400 | 8 | 7.97 |

HUH (Open Web Applications)

Heavy Universal Hanger


Standard Installation Instructions – Open Web Header

Stage 1

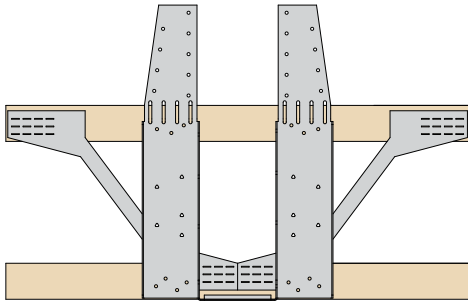


Position hanger flush with underside of joist.

Stage 2

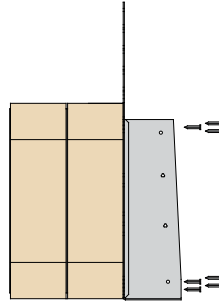


Face nail to top and bottom chords using 14No 3.4 x 35mm square twist nails in total.

Stage 3

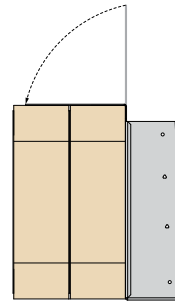

Wipe over top tabs to give a flush fit to the joist.


Stage 4

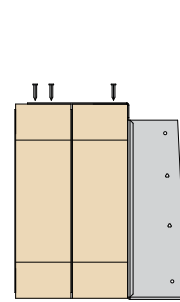

Nail top tabs into top chord of joist – Min 2No 3.4 x 35mm square twist nails into rear ply and 1No 3.4 x 35mm square twist nail into front ply per leg.


Enhanced Installation Instructions – Solid Header

Stage 1

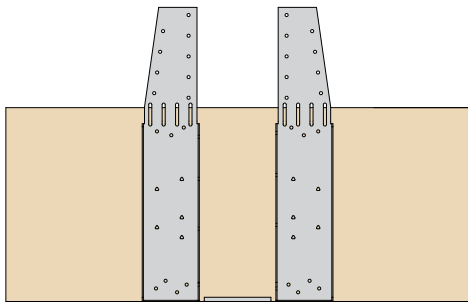


Position hanger flush with underside of joist.

Stage 2

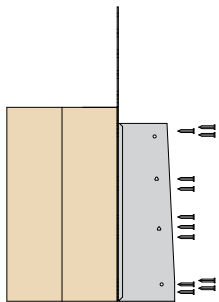


Fill all round and triangular nail holes to header joist with 3.4 x 35mm square twist nails.

Stage 3

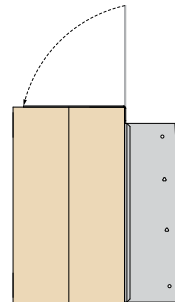

Wipe over top tabs to give a flush fit to the joist.

Stage 4


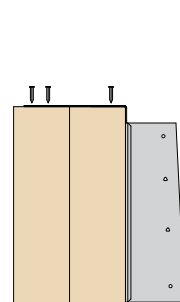


Nail top tabs into top chord of joist – Min 2No 3.4 x 35mm square twist nails into rear ply and 1No 3.4 x 35mm square twist nail into front ply per leg.

HUH (Open Web Applications)

Heavy Universal Hanger


Standard Installation With Blocking Instructions – Open Web Header

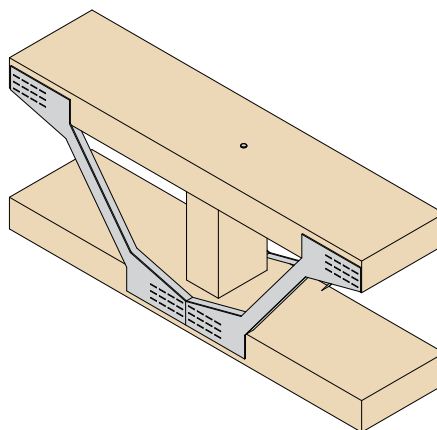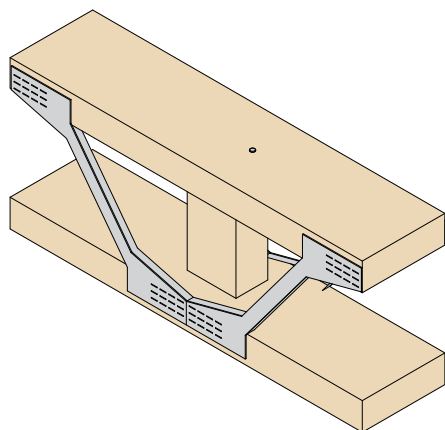

Applying a high load to the top flange of an open web joist can lead to failure of the joist itself (i.e metal webs buckling)

Adding a vertical blocking piece to the open web joist prevents buckling and helps transfer the load, therefore allowing the hanger to perform to a greater capacity.

Stage 1

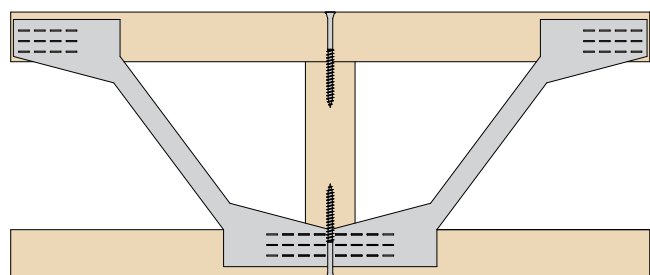


Vertical blocking piece to be built into Open Web Joist, centred on incoming hanger position.

Vertical blocking piece to be minimum 47 x 72mm C16 timber.


Fixed using Paslode 3.1 x 90mm annular ring shank nails.

Stage 2

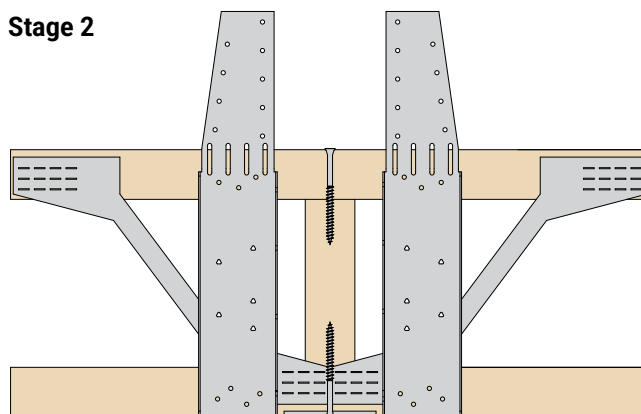


Position hanger against face of Open Web Joist with locating tab tight to underside of joist.

Stage 3

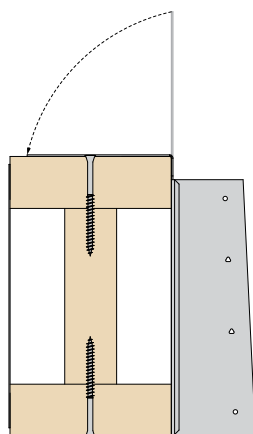

Wipe over top tabs to give a flush fit to the joist.

Stage 4

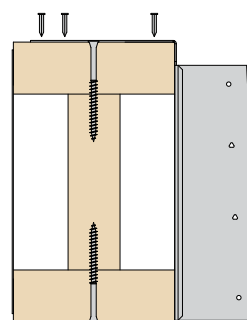


Nail top tabs into top chord of joist – Min 2No 3.4 x 35mm square twist nails into rear ply and 1No 3.4 x 35mm square twist nail into front ply per leg.

HUH (Open Web Applications)

Heavy Universal Hanger

Open Web Header With Plywood Gusset Instructions

Stage 1

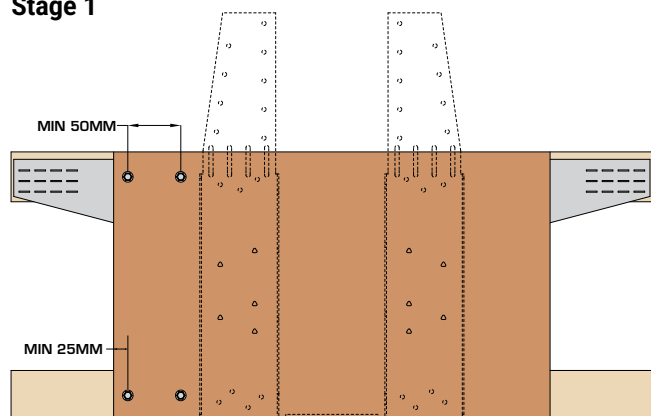


18mm plywood should be fixed to the face of the open web joist with 4No PSTS 6.5mm into the top chord and 4No PSTS 6.5mm into the bottom chord.

Plywood should be the full depth of the open web and of a width to give the screws the appropriate edge distance.


Paslode Structural Timber Screws should be used to fix the plywood to the open web joist. The screw length is dependant on the joist thickness.

Stage 3

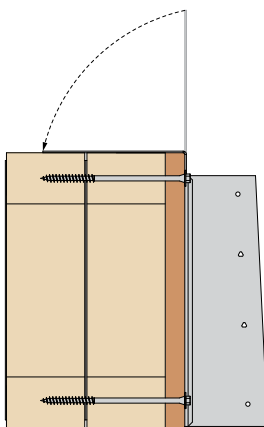

Wipe over top tabs to give a flush fit to the joist.

Stage 2

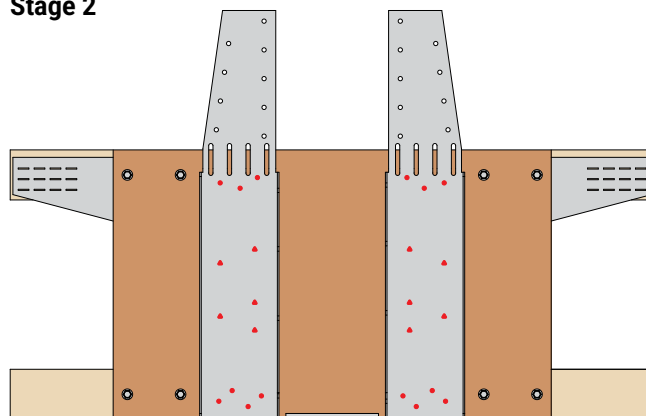

Position hanger flush with underside of joist.

Circular nail holes filled from bottom to top ensuring hanger side flanges are plumb.


All fixings are 3.4 x 35mm square twist nails.

Triangular nail holes should also be filled.



Fixings may clash with metalweb behind and this installation may only be suitable for PPN installation only.

Stage 4

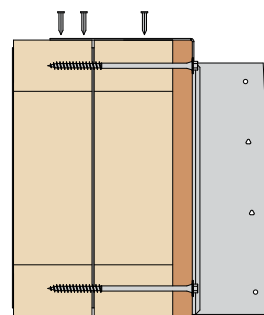

Nail top tabs into top chord of joist – Min 2No 3.4 x 35mm square twist nails into rear ply and 1No 3.4 x 35mm square twist nail into front ply per leg.

Screw Specification

| Header Joist Thickness | Fixing Ref | Product Code | Box Qty |
|------------------------|-------------|--------------|---------|
| Single 72mm | PSTS6.5X65 | 551105 | 100 |
| Single 97mm | PSTS6.5X100 | 551106 | 100 |
| Single 122mm | PSTS6.5X100 | 551106 | 100 |
| Single 147mm | PSTS6.5X115 | 551102 | 100 |
| Double 72mm | PSTS6.5X150 | 551107 | 100 |
| Double 97mm | PSTS6.5X200 | 551108 | 100 |
| Double 122mm | PSTS6.5X200 | 551108 | 100 |
| Double 147mm | PSTS6.5X250 | 551109 | 100 |


Steel Connections

Scan or click to view
installation videos




FACE FIXED ONLY TO PACKER WITHIN STEEL – JOIST/TRUSS LINING THROUGH WITH BOTTOM OF STEEL


PARTIAL FIXING CAPACITY

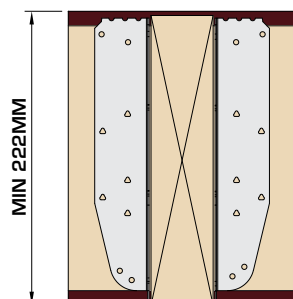

UH OR HUH* – 220MM DEEP
(219–225mm deep joists)

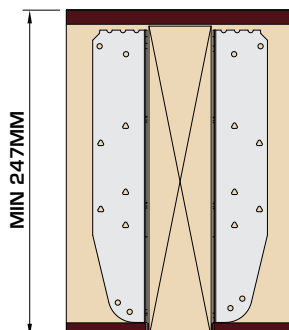

UH OR HUH* – 235MM DEEP
(235–254mm deep joists)

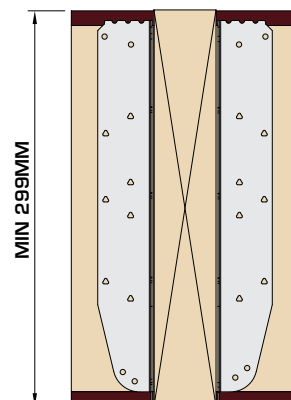

UH OR HUH* – 300MM DEEP
(300–304mm deep joists)

| Fixings (3.4 x 35mm Square Twist Nails) | | Characteristic Capacity (kN) | |
|---|----------|------------------------------|------------|
| Face | Incoming | Uplift | C16 Timber |
| 14 | 2 | 1.98 | 13.20 |

| Fixings (3.4 x 35mm Square Twist Nails) | | Characteristic Capacity (kN) | |
|---|----------|------------------------------|------------|
| Face | Incoming | Uplift | C16 Timber |
| 18 | 2 | 1.98 | 15.20 |


| Fixings (3.4 x 35mm Square Twist Nails) | | Characteristic Capacity (kN) | |
|---|----------|------------------------------|------------|
| Face | Incoming | Uplift | C16 Timber |
| 18 | 2 | 1.98 | 15.20 |

Timber packer to be securely fixed to web of steel beam, packer to be fixed tightly to bottom flange of steelwork. Timber packer to be a minimum of C16 grade timber. Fixing of timber packer to steelwork by Building Designer.


*HUH hanger top tabs are not required to be fixed for these load capacities. Tabs may be folded or cut to suit.

FACE FIXED TO PACKER WITHIN STEEL – JOIST/TRUSS DROPPED BELOW BOTTOM OF STEEL


PARTIAL FIXING CAPACITY

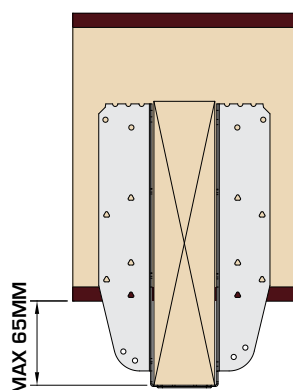

UH OR HUH* – 220MM DEEP

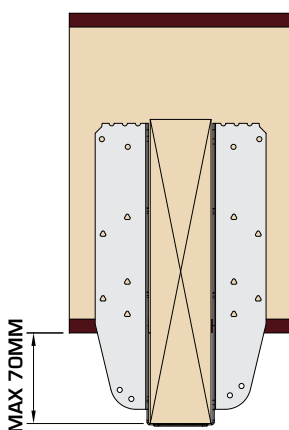

UH OR HUH* – 235MM DEEP

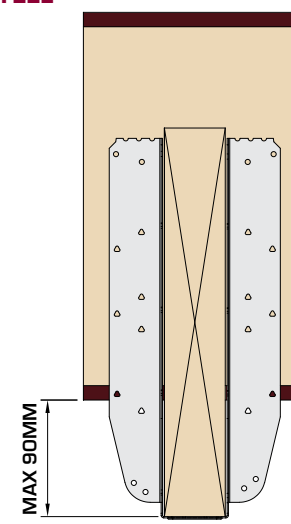

UH OR HUH* – 300MM DEEP

| Fixings (3.4 x 35mm Square Twist Nails) | | Characteristic Capacity (kN) | |
|---|----------|------------------------------|------------|
| Face | Incoming | Uplift | C16 Timber |
| 10 | 2 | 1.98 | 12.40 |

| Fixings (3.4 x 35mm Square Twist Nails) | | Characteristic Capacity (kN) | |
|---|----------|------------------------------|------------|
| Face | Incoming | Uplift | C16 Timber |
| 10 | 2 | 1.98 | 12.40 |

| Fixings (3.4 x 35mm Square Twist Nails) | | Characteristic Capacity (kN) | |
|---|----------|------------------------------|------------|
| Face | Incoming | Uplift | C16 Timber |
| 14 | 2 | 1.98 | 13.20 |

Timber packer to be securely fixed to web of steel beam, packer to be fixed tightly to bottom flange of steelwork. Timber packer to be a minimum of C16 grade timber. Fixing of timber packer to steelwork by Building Designer.


*HUH hanger top tabs are not required to be fixed for these load capacities. Tabs may be folded or cut to suit.

FOR CONNECTIONS OUTWITH THIS SCOPE PLEASE CONTACT TECHNICAL SUPPORT FOR GUIDANCE


Steel Connections

FACE FIXED ONLY TO PACKER WITHIN STEEL – JOIST/TRUSS LINING THROUGH WITH TOP OF STEEL


PARTIAL FIXING CAPACITY

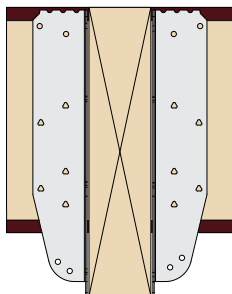

UH OR HUH* – 220MM DEEP
(219–225mm deep joists)

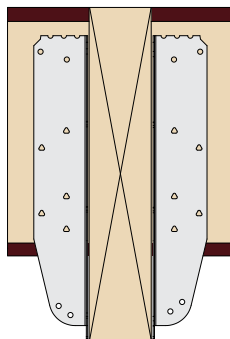

UH OR HUH* – 235MM DEEP
(235–254mm deep joists)

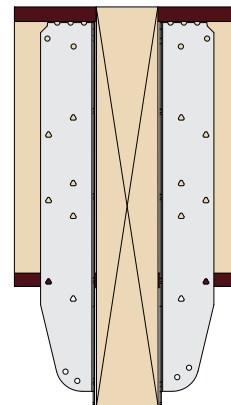

UH OR HUH* – 300MM DEEP
(300–304mm deep joists)

| Fixings (3.4 x 35mm Square Twist Nails) | | Characteristic Capacity (kN) | |
|---|----------|------------------------------|------------|
| Face | Incoming | Uplift | C16 Timber |
| 14 | 2 | 1.98 | 13.20 |





| Fixings (3.4 x 35mm Square Twist Nails) | | Characteristic Capacity (kN) | |
|---|----------|------------------------------|------------|
| Face | Incoming | Uplift | C16 Timber |
| 14 | 2 | 1.98 | 13.20 |

| Fixings (3.4 x 35mm Square Twist Nails) | | Characteristic Capacity (kN) | |
|---|----------|------------------------------|------------|
| Face | Incoming | Uplift | C16 Timber |
| 14 | 2 | 1.98 | 13.20 |

Timber packer to be securely fixed to web of steel beam, packer to be fixed tightly to bottom flange of steelwork. Timber packer to be a minimum of C16 grade timber. Fixing of timber packer to steelwork by Building Designer.

*HUH hanger top tabs are not required to be fixed for these load capacities. Tabs may be folded or cut to suit.

FACE FIXED TO PACKER WITHIN STEEL & FIXED TO TOP – JOIST LINING THROUGH WITH TOP FULLY FIXED TO STEEL

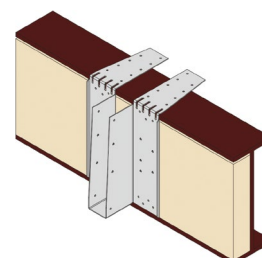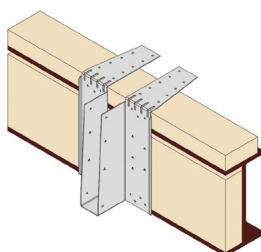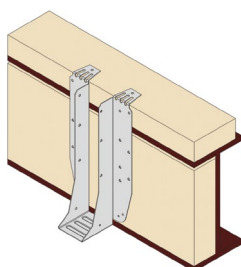

Hanger fixed to timber wallplate / packer secured to top flange and web of steel beam using 3.4 x 35mm square twist nails. Timber packer fixed to web of beam (as per Building Designers instructions) to prevent hanger rotation. Timber wallplate / packer must be a minimum of 35 x 72mm C16 grade timber.

Hanger fixed directly to top flange of steel beam using 4no. Spit Spitfire P370 Cartridge tool using SC9 nails or equivalent, into the hanger flanges. Hanger fixed to timber packer secured to web of steel beam using 3.4 x 35mm square twist nails. Timber packer fixed to web of beam (as per Building Designers instructions) to prevent hanger rotation. Timber packers must be a minimum of 35 x 72mm C16 grade timber.

| Product Code | Hanger Width (mm) | Hanger Depth (mm) | Fixings | | | Characteristic Capacity (kN) | |
|--------------|-------------------|-------------------|---------|-----|----------|------------------------------|-------|
| | | | Face | Top | Incoming | Uplift | Down |
| | | 220 | 18 | | | 3.97 | 13.20 |
| | | 235 | 18 | | | | 15.20 |
| | | 300 | 22 | | | | 15.20 |
| | | 220–235 | 24 | 6 | 4 | 3.97 | 23.30 |
| HUH | 39–300 | 300 | | | | | |

*HUH hanger top tabs are not required to be fixed for these load capacities. Tabs may be folded or cut to suit.

FOR CONNECTIONS OUTWITH THIS SCOPE PLEASE CONTACT TECHNICAL SUPPORT FOR GUIDANCE


Steel Connections

TOP FIXED TO STEEL WITH OR WITHOUT MASONRY ABOVE

PARTIAL FIXING CAPACITY



MASONRY HANGERS MUST BE USED WHEN MASONRY BEING CONSTRUCTED ABOVE STEEL FLANGE

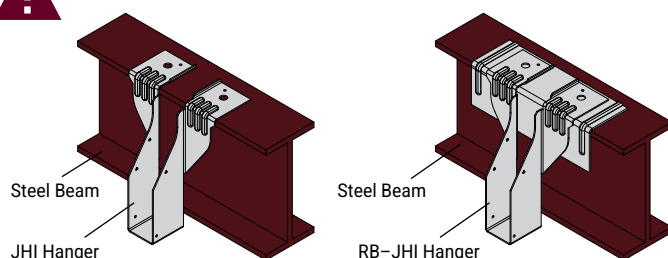


| Hanger Type | Hanger Width (mm) | Hanger Depth (mm) | Top | Incoming | Characteristic Capacity (kN) | |
|-------------|-------------------|-------------------|-----|----------|------------------------------|-------|
| | | | | | Uplift | Down |
| JHI | 39-100 | All depths | 4 | 2 | 2.00 | 23.04 |
| JHI | 122-198 | All depths | 4 | 2 | 2.00 | 13.97 |
| RB-JHI | 39-250 | All depths | 4 | 2 | 2.00 | 28.31 |

Hanger shot fired to steel beam with SC9 nails or equivalent per leg using SPIT P370 Cartridge Tool.

TOP FIXED TO STEEL WITH NO MASONRY ABOVE

PARTIAL FIXING CAPACITY


Hanger must be folded above the snap line

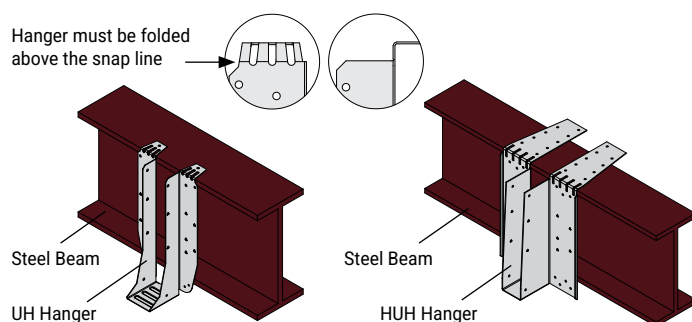

| Hanger Type | Hanger Width (mm) | Hanger Depth (mm) | Top | Incoming | Characteristic Capacity (kN) | |
|-------------|-------------------|-------------------|-----|----------|------------------------------|-------|
| | | | | | Uplift | Down |
| UH | 39-100 | 220/235/300 | 2 | 4 | 3.97 | 10.80 |
| HUH | 39-300 | All depths | 6 | 4 | 3.97 | 13.20 |

Hanger shot fired to steel beam with SC9 nails or equivalent per leg using SPIT P370 Cartridge Tool.

Hanger must be folded above the snap line

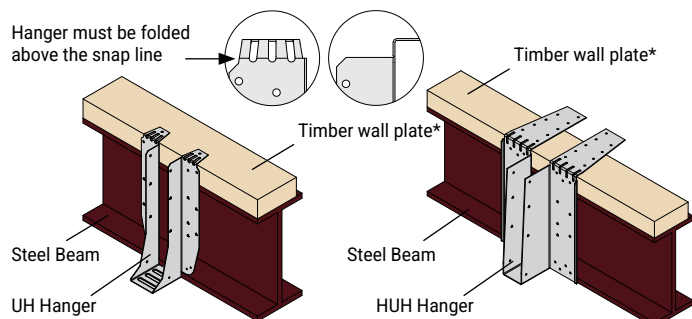


| Hanger Type | Hanger Width (mm) | Hanger Depth (mm) | Face | Top | Incoming | Characteristic Capacity (kN) | |
|-------------|-------------------|-------------------|------|-----|----------|------------------------------|-------|
| | | | | | | Uplift | Down |
| UH | 39-100 | 220/235/300 | 4 | 2 | 4 | 3.97 | 10.80 |
| HUH | 39-300 | All depths | 6 | 6 | 4 | 3.97 | 13.20 |


*Min 35x72 C16 fixed to steel as per Building Designer's specification.

Hanger nailed to timber wallplate with 3.4x35mm Square Twist Nails.


PREVENTING HANGER ROTATION FOR TIMBER & MASONRY HANGERS

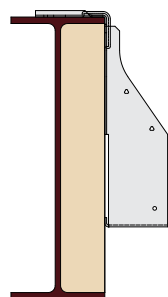

Where hanger does not extend past or rest on the bottom of the steel flange a timber packer is required to prevent rotation.

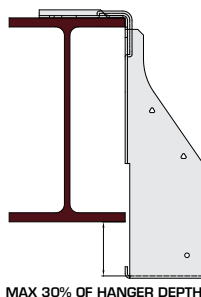

Where hanger extends past bottom of steel flange the drop must not exceed 30% of the hanger depth to prevent rotation.

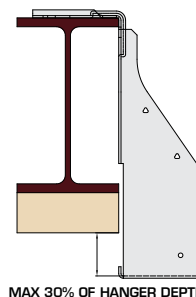


Where hanger extends past bottom of steel flange and drops >30% of the hanger depth a timber packer fixed as per building designers details can be used to reduce drop depth to <30%.

FOR CONNECTIONS OUTWITH THIS SCOPE PLEASE CONTACT TECHNICAL SUPPORT FOR GUIDANCE

MH RANGE

Multi Hanger

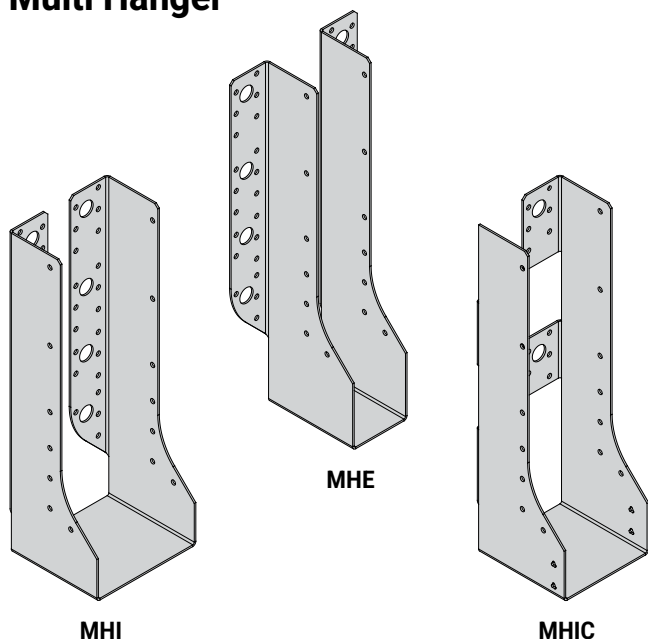

The MH hanger range is designed to support timber to timber connections in medium to high load situations.

Features & Benefits

- External and internal flange options allow for multifunctional use
- Range of sizes and potential fixing options allows for greater design flexibility
- Partial fixing options available on request. Contact Technical Support.

Material Specification

- Galvanised mild steel – Z275

Fixings

| Code | Description | Box Qty |
|-------------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |
| See page 10 | M12 Bolts | Each |

*For use with Paslode PPNXi

Available Sizes

| Hanger Width (W) (mm) | MHE380 | MHI/MHIC380 | MHE490 | MHI/MHIC490 | MHE620 | MHI/MHIC620 |
|-----------------------|----------------|----------------|----------------|----------------|----------------|----------------|
| 39 | MHE380-39-170 | MHIC380-39-170 | MHE490-39-225 | MHIC490-39-225 | – | MHIC620-39-290 |
| 50 | MHE380-50-165 | MHIC380-50-165 | MHE490-50-220 | MHIC490-50-220 | MHE620-50-285 | MHIC620-50-285 |
| 55 | – | – | – | MHIC490-55-217 | – | – |
| 61 | – | – | – | MHIC490-61-214 | – | MHIC620-61-279 |
| 65 | – | – | – | MHIC490-65-212 | – | – |
| 75 | MHE380-75-152 | MHIC380-75-152 | MHE490-75-207 | MHIC490-75-207 | MHE620-75-272 | MHIC620-75-272 |
| 78 | – | – | MHE490-78-206 | MHIC490-78-206 | MHE620-78-271 | – |
| 92 | MHE380-92-144 | MHI380-92-144 | MHE490-92-199 | MHI490-92-199 | MHE620-92-264 | MHI620-92-264 |
| 100 | MHE380-100-140 | MHI380-100-140 | MHE490-100-195 | MHI490-100-195 | MHE620-100-260 | MHI620-100-260 |
| 110 | – | – | MHE490-110-190 | – | – | – |
| 118 | – | – | MHE490-118-186 | – | – | – |
| 122 | – | – | MHE490-122-184 | – | MHE620-122-249 | – |
| 125 | – | – | MHE490-125-182 | MHI490-125-182 | MHE620-125-247 | MHI620-125-247 |
| 130 | – | – | – | – | MHE620-130-245 | – |
| 135 | – | – | MHE490-135-177 | MHI490-135-177 | – | – |
| 138 | – | – | MHE490-138-176 | MHI490-138-176 | MHE620-138-241 | MHI620-138-241 |
| 144 | – | – | – | MHI490-144-173 | MHE620-144-238 | – |
| 150 | MHE380-150-115 | MHI380-150-115 | MHE490-150-170 | MHI490-150-170 | MHE620-150-235 | MHI620-150-235 |

| Hanger Width (W) (mm) | MHE620 | MHI620 | MHE670 | MHE720 |
|-----------------------|----------------|----------------|----------------|----------------|
| 183 | MHE620-183-218 | MHI620-183-218 | – | – |
| 198 | MHE620-198-211 | MHI620-198-211 | – | – |
| 210 | – | – | MHE670-210-230 | – |
| 225 | – | – | MHE670-225-222 | – |
| 230 | – | – | MHE670-230-220 | – |
| 250 | – | – | MHE670-250-210 | – |
| 300 | – | – | – | MHE720-300-210 |

Example: **MHIC620-50-285**

L W H
L = length W = width H = height





The hanger depth must be at least 60% of the carried member depth to prevent rotation.

MH RANGE


Multi Hanger

Hanger Coding

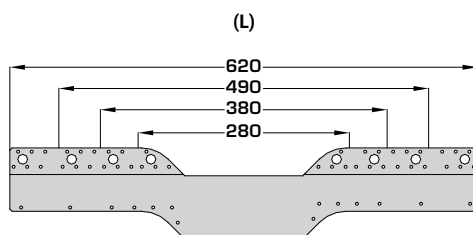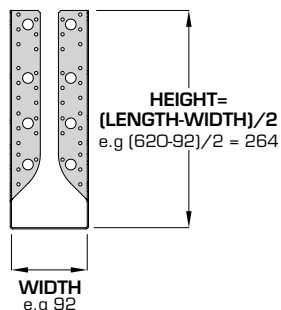


MHE/MHI FLAT BLANK

(280 - 620)

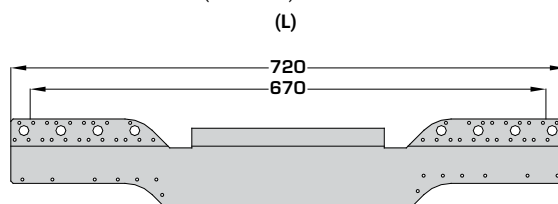

MHE/MHI FLAT BLANK

(670 - 720)

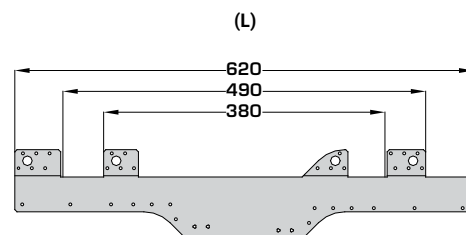


MHIC FLAT BLANK


Example: **MHI620-92-264**
 $\frac{L}{W} \frac{H}{H}$
 L = length W = width H = height

Dimensions (mm)

MHE

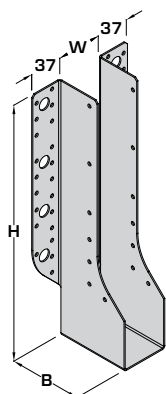


MHI/MHIC

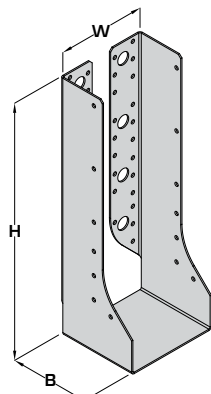


In Situ

MHI Installed onto Solid Header with Open Web incoming

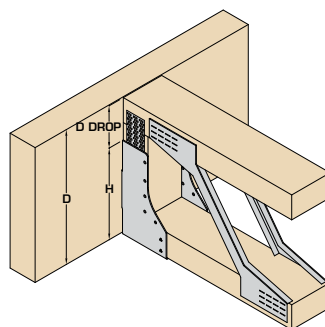

Applies to MHE/MHI/MHIC –
 Hanger height (H) must be minimum 60%
 of joist depth (D).
 Where hanger drop (D DROP) exceeds 32mm
 a solid end block is required with max 25mm
 horn.

MHI Installed onto Solid Header with I-Joist incoming

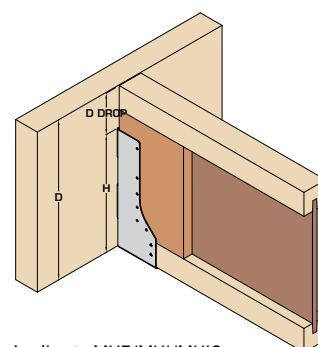

Applies to MHE/MHI/MHIC –
 Hanger height (H) must be minimum 60%
 of joist depth (D).
 Where hanger drop (D DROP) exceeds
 values below web stiffeners are required.

Load Data

| Product Code | Dimensions (mm) | | | Fixings (3.4 x 35mm) | | Characteristic Capacity (kN) | | | |
|--------------|-----------------|-----|----|----------------------|----------|------------------------------|---|-------------------------------------|------------------------------------|
| | W | | B | Header | Incoming | Uplift | I-Joist Header With Backer Block (Solid/LVL Flange) | Open Web Header With Plywood Gusset | Solid Timber Header (Min TR26/C27) |
| | Min | Max | | | | | | | |
| MHIC380 | 39 | 78 | 82 | 9 | 10 | 8.49 | 10.55 | 10.55 | 10.55 |
| MHE/MHI380 | 39 | 150 | 85 | 18 | 10 | 8.49 | 20.07 | 20.07 | 20.07 |
| MHIC490 | 39 | 78 | 82 | 16 | 12 | 14.72 | 16.76 | 16.76 | 16.76 |
| MHE/MHI490 | 39 | 150 | 85 | 30 | 12 | 14.72 | 25.66 | 25.66 | 25.66 |
| MHIC620 | 39 | 78 | 82 | 21 | 14 | 14.72 | 21.26 | 21.26 | 21.26 |
| MHE/MHI620 | 39 | 100 | 85 | 42 | 14 | 14.72 | 32.77 | 29.50 | 32.77 |
| MHE/MHI620 | 122 | 150 | 85 | 42 | 14 | 14.72 | 25.92 | 25.92 | 25.92 |
| MHE/MHI620 | 183 | 198 | 85 | 42 | 14 | 14.72 | 32.77 | 29.50 | 32.77 |
| MHE670 | 210 | 250 | 85 | 42 | 14 | 14.72 | 32.77 | 29.50 | 32.77 |
| MHE720 | 300 | 300 | 85 | 42 | 14 | 14.72 | 32.77 | 29.50 | 32.77 |

| Flange Depth (mm) | D Drop (mm) |
|-------------------|-------------|
| 36 | 26 |
| 39 | 29 |
| 45 | 35 |


Where full uplift capacities are not required a minimum of 2No fixings are required into the incoming joist.

| Fixings (3.4 x 35mm) | Characteristic Capacity (kN) |
|----------------------|------------------------------|
| Incoming | Uplift |
| 2 | 1.98 |

See Page 76 for plywood fixing details. See Page 113 for MHE bolted values to solid timber.

KM


Mini Hanger

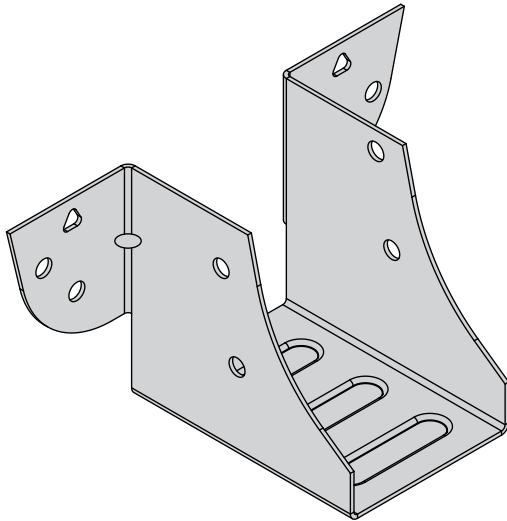

Available Sizes

| Product Code | Hanger Width (W) (mm) | Hanger Depth (H) (mm) |
|--------------|-----------------------|-----------------------|
| KM-50 | 50 | 43 |

Dimensions (mm)

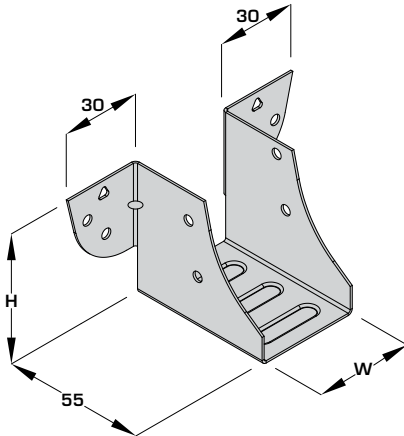

Load Data

| Product Code | Fixings (3.4 x 35mm) | | Characteristic Capacity (kN)** | |
|--------------|----------------------|----------|--------------------------------|----------------------------|
| | Header | Incoming | Uplift | I-Joist (LVL/Solid Flange) |
| KM-50 | 4 | 4 | 5.16 | 5.16 |

**Values obtained from tests carried out by ITW Construction Products Offsite and calculated in accordance with ETAG 015

Values apply to new design only. Please contact Technical Support for further information if required.

The KM hanger is used to support joists where a compact economical connector is required.

Features & Benefits

- New and improved design achieves higher load carrying capacities
- Additional side fixings allow for increased uplift capacity
- Optional triangular holes for increased performance on solid headers
- Rear location tab to assist with installation

Material Specification

- Galvanised mild steel – Z275

Approvals


- Meets NHBC Technical Requirements

Fixings

| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |


*For use with Paslode PPNXi

In Situ

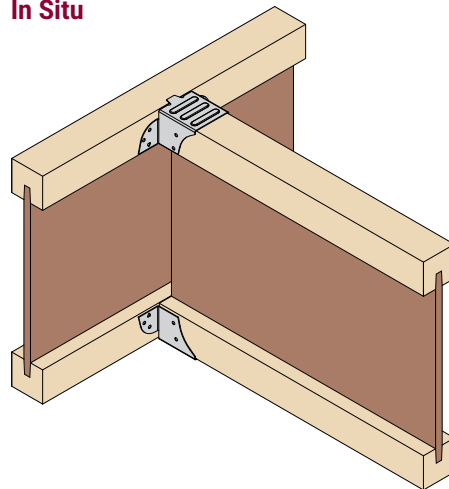

FTHI

Flexible Timber Hanger

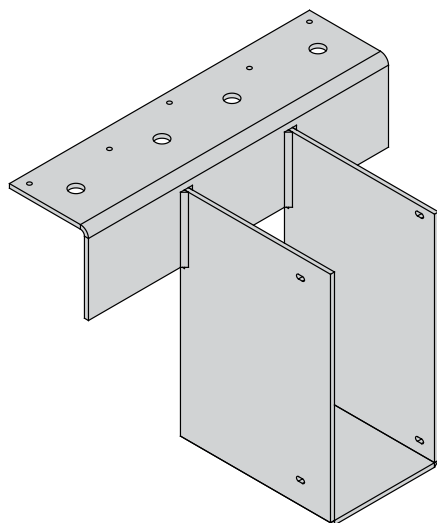

The FTHI hanger is designed to support joists, trussed rafters and solid timber members in a top fix only application for high load situations.

Features & Benefits

- Increased top flange to allow for greater load distribution
- Options available for skewed, offset, dropped and straddle connections

Material Specification

- 4mm mild steel with zinc phosphate undercoat with an organic bituminous top coat to BS EN845-1:2013+A1:2016

Fixings

| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi

Available Sizes


Hanger Widths (mm):

39, 46, 50, 61, 65, 72, 75, 78, 92, 100, 122, 125, 130, 138, 144, 150, 183, 198, 222, 225, 250, 300

Hanger Depths (mm):

140, 165, 195, 200, 210, 220, 225, 230, 235, 241, 245, 253, 280, 302, 350, 356, 380, 393, 400, 418, 450


FTHI

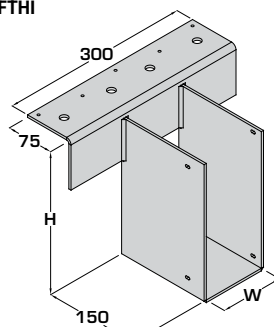

FTHI-W-H

Example:
FTHI-100-245

FTHIS – SKEW

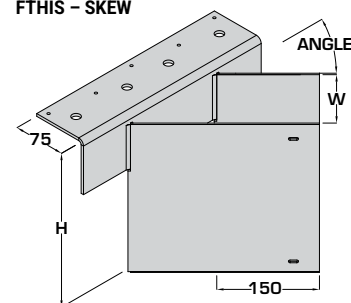


FTHIS-W-H-OFFSET DIRECTIONAL-ANGLE

Example:
FTHIS-100-245-L-45

(skews from 30-87.5° in 2.5° increments, with 5mm automatically added to ordered width to allow for tolerance)

FTHIO – OFFSET

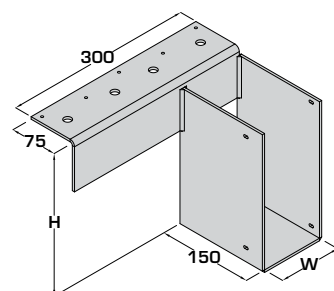


Left hand version shown

FTHIO-W-H-OFFSET DIRECTION

Example:
FTHIO-100-245-L / FTHIO-100-245-R


FTHID – DROPPED

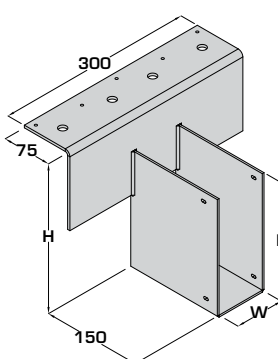

FTHID-W-H-F

Example:
FTHID-100-245-220

FTHIST – STRADDLE

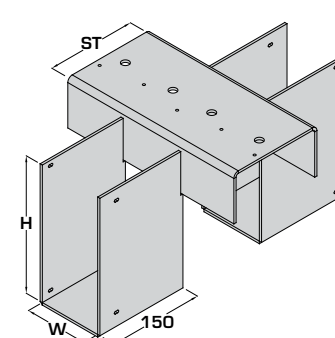

FTHIST-W-H-ST

Example:
FTHIST-100-245-140

Load Data


| Product Code | Fixings (3.4 x 35mm) | | Characteristic Capacity (kN) | |
|---------------|----------------------|----------|------------------------------|-----------------------|
| | Header | Incoming | Uplift | LVL or GL (Min GL28h) |
| FTHI/S/O/D/ST | 5 | 2 | 2.00 | 42.00 |

Hanger can be used when supported on an open web header given solid blocking is provided in the joist. I-Joist members require backer blocks

12mm diameter holes to top-plate do not require fixings for this application

VS

Variable Skewed Timber Hanger

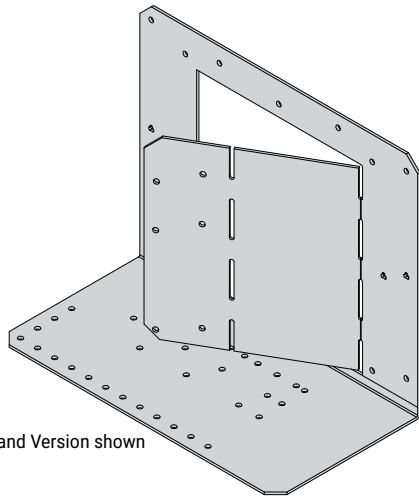

Right Hand Version shown

The VS hanger is used to support joists and trusses up to 97mm wide from solid timber members in skewed applications between 30 – 90°.

Features & Benefits

- Unique hanger design provides a variable skew angle between 30 – 90°
- No need to mitre cut joists
- Angle scale on base to ease adjustment

Material Specification

- Galvanised mild steel – Z275

Fixings

| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |



*For use with Paslode PPNXi

Available Sizes


| Min Joist Width (mm) | Max Joist Width (mm) | Handing | Hanger Depth (mm) | | | |
|----------------------|----------------------|---------|----------------------|----------|----------|----------|
| | | | 195 | 220 | 240 | 300 |
| 38 | 97 | Right | VS-195-R | VS-220-R | VS-240-R | VS-300-R |
| 38 | 97 | Left | VS-195-L | VS-220-L | VS-240-L | VS-300-L |
| >97 | | | See FTHIS on page 83 | | | |

Left Hand


Right Hand

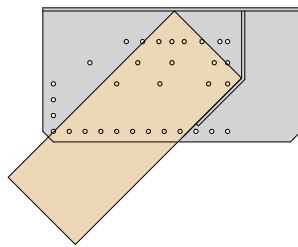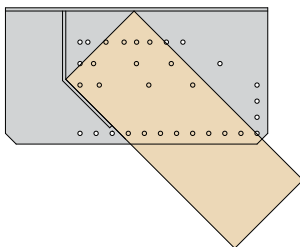

Dimensions (mm)

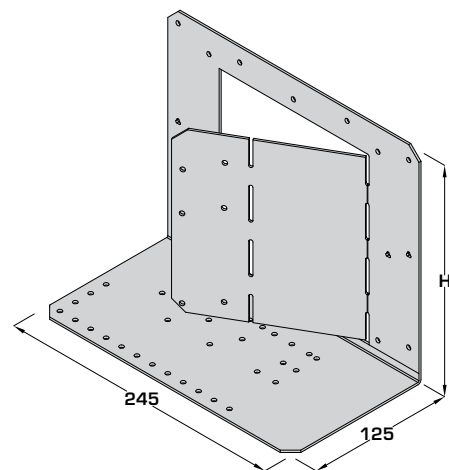


In Situ

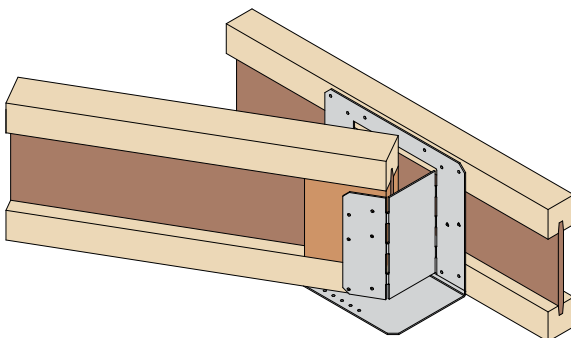

- Web stiffeners required for incoming I-Joist
- Backer blocks only required for enhanced capacity

| Joist Depth (mm) | Hanger Depth (mm) |
|------------------|-------------------|
| 195/200 | 195 |
| 220/235 | 220 |
| 240/245 | 240 |
| 300 | 300 |

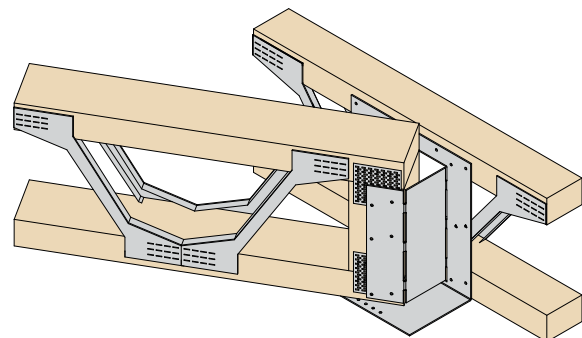

- Adequate end blocking required to allow fixings into incoming Open Web Joist

| Joist Depth (mm) | Hanger Depth (mm) |
|------------------|-------------------|
| 195/202 | 195 |
| 219/225 | 220 |
| 253/254 | 240 |
| 304 | 300 |

VS

Variable Skewed Timber Hanger

Load Data

| Hanger Depth (mm) | Fixings (3.4 x 35mm) | | Characteristic Capacity (kN) | | |
|-------------------|----------------------|----------|------------------------------|------------------------------|--------------------------------|
| | Header | Incoming | Uplift | I-Joist Header (all flanges) | Open Web Header |
| 195/220/240 | 11 | 6 | 3.75 | 5.90 | 5.90 |
| 300 | 11 | 6 | 3.75 | 6.39 | 6.39 |
| | | | | I-Joist Header With Backer | Glulam (Min GL28h)/LVL* Header |
| 195/220/240/300 | 15 | 6 | 3.75 | 6.37 | 7.23 (7.28*) |

Installation Instructions

Stage 1


Adjust side plate to approximate angle between 30° and 90° using scale on base of hanger, bending only once. Please refer to the angle table below to determine if one or two bends are required.

| | Joist Width (mm) | Double Bend | Single Bend |
|-------------|------------------|-------------|-------------|
| Single Bend | 35 | 30-90° | n/a |
| | 38 | 30-90° | n/a |
| | 44 | 30-90° | n/a |
| | 45 | 30-90° | n/a |
| | 47 | 30-90° | n/a |
| Double Bend | 51 | >32-90° | 30-32° |
| | 53 | >32-90° | 30-32° |
| | 58 | >34-90° | 30-34° |
| | 59 | >34-90° | 30-34° |
| | 60 | >35-90° | 30-34° |
| | 63 | >37-90° | 30-37° |
| | 70 | >39-90° | 30-39° |
| | 72 | >40-90° | 30-40° |
| | 76 | >42-90° | 30-42° |
| | 88 | >46-90° | 30-46° |
| | 89 | >46-90° | 30-46° |
| | 90 | >46-90° | 30-46° |
| | 94 | >48-90° | 30-48° |
| | 97 | >49-90° | 30-49° |

Stage 2


Position hanger against face of joist/truss and face nail using 11(15*)No nails in total.

*For solid headers

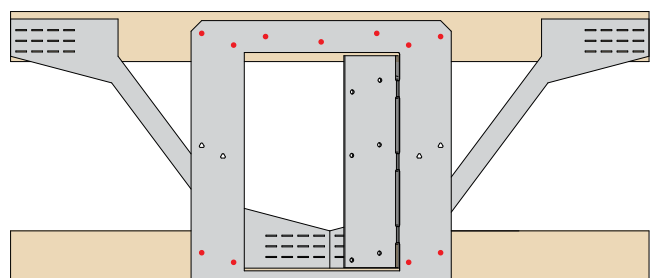


Stage 3

Locate incoming member and adjust side plate to correct angle, ensuring maximum gap between incoming joist/truss and back plate is no greater than 3mm.

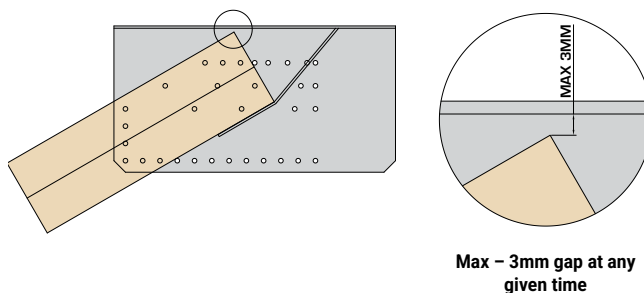


Stage 4

Fix to incoming member using 6No 3.4 x 35mm square twist nails. Where incoming member is an I-Joist, web stiffeners must be fixed as per the I-Joist manufacturer's guidelines.

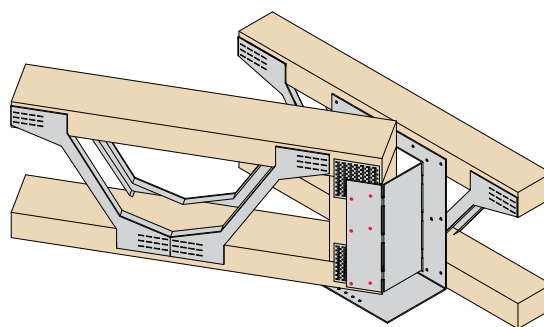


Please ensure that 1No inner nail hole (indicated in red) and 1No outer nail hole (indicated in red) are filled on the underside with 3.4 x 35mm square twist nails.

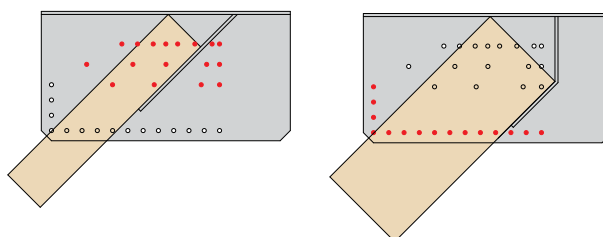

VRC

Variable Ridge Connector

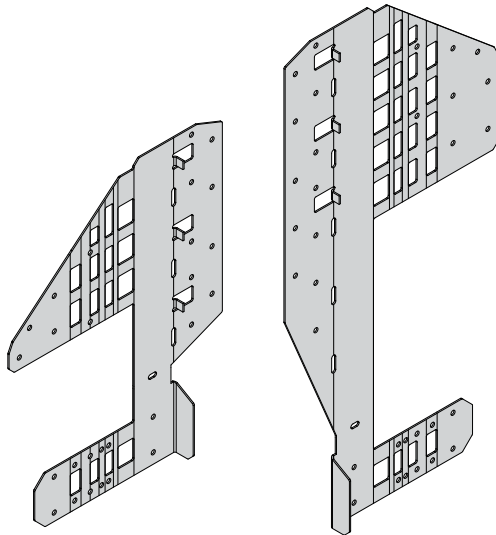

VRC-195-L

VRC-350-R

Available Sizes

| Min Joist Width (mm) | Max Joist Width (mm) | Handing | Timber Depth (mm) | |
|----------------------|----------------------|---------|--------------------------|-----------|
| | | | 195 – 300 | 350 – 450 |
| 38 | 97 | Right | VRC-195-R | VRC-350-R |
| 38 | 97 | Left | VRC-195-L | VRC-350-L |
| >97 | | – | Contact Cullen Technical | |

The VRC connects solid timber and I-Joist rafters to ridge beams.

Features & Benefits

- Innovative design allows the part to be flexible for slopes between -35° and $+45^{\circ}$ and skews between 30° and 90°

Material Specification



- Galvanised mild steel – Z275

Fixings


| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi


Dimensions (mm)

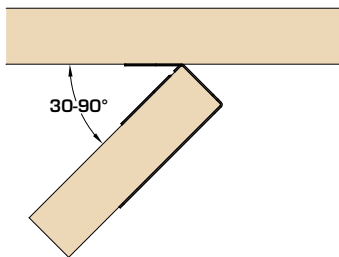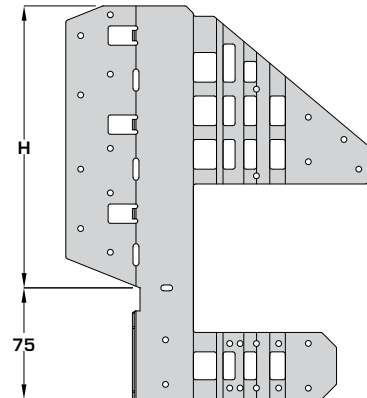

Right hand skew
(skews between $30-90^{\circ}$)

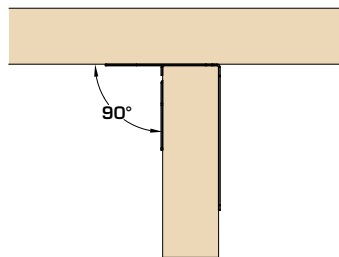


90 degrees
(left or right hand can be specified)

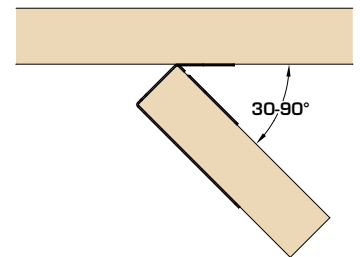


Left hand skew
(skews between $30-90^{\circ}$)

In Situ

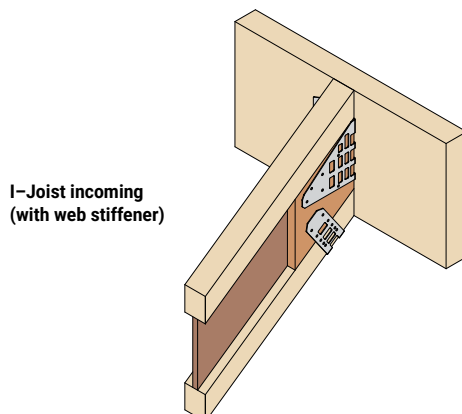

I-Joist incoming
(with web stiffener)

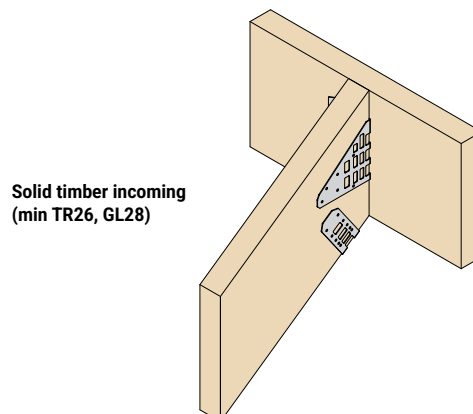

Solid timber incoming
(min TR26, GL28)

VRC

Variable Ridge Connector


Load Data

| Hanger Depth (mm) | Dimensions (mm) | Fixings (3.4x35mm) | | Angles | | Characteristic Capacity (kN) | |
|---------------------------|--------------------|--------------------|----------|----------------|--------------|------------------------------|--|
| | | | | | | Uplift | Header Specification |
| | | | | | | | Solid Timber (Min TR26), Glulam (Min GL28h), LVL & I-Joist ⁽¹⁾ |
| (Depth Dependant Only) | H | Header | Incoming | Slope | Skew | | |
| 195 | 190 | 9 | 8 | 0° | n/a (90°) | 2.59 | 6.85 |
| | | | | 0° | 30° to 87.5° | 2.59 | 6.40 |
| | | | | (-35° to +45°) | n/a (90°) | 2.59 | 10.20 |
| | | | | (-35° to +45°) | 30° to 87.5° | 2.59 | 8.54 |
| 350 | 345 | 12 | 8 | 0° | n/a (90°) | 2.59 | 6.85 |
| | | | | 0° | 30° to 87.5° | 2.59 | 6.40 |
| | | | | (-35° to +45°) | n/a (90°) | 2.59 | 10.20 |
| | | | | (-35° to +45°) | 30° to 87.5° | 2.59 | 8.54 |

(1) I-Joist headers require backer blocks to be installed as per joist manufacturer's instructions.


Installation Instructions

Stage 1

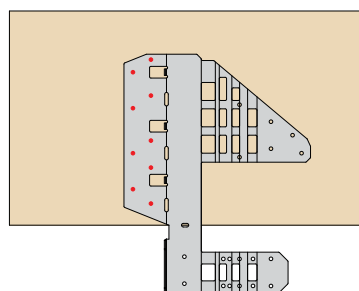


Face fix VRC to solid header using 9No 3.4 x 35mm square twist nails.
Adjust angle of base plate if slope is required.

Stage 2

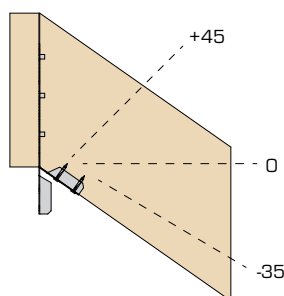


Offer incoming member and fix using 2No 3.4 x 35mm square twist nails to the underside of the incoming member.

Stage 3

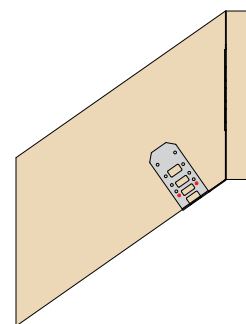

Wipe up the bottom side flange at the appropriate crease line and fill the 2No nail holes closest to the bend line with 3.4 x 35mm square twist nails.


Stage 4

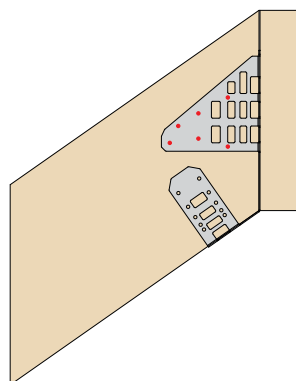


Wipe round the top side flange at the appropriate crease line and fill all the nail holes into the incoming joist.
Minimum 4No 3.4 x 35mm square twist nails.

Stage 5 (For skewed applications only)

Right hand version

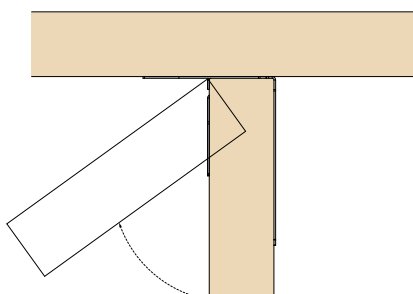


Left hand version

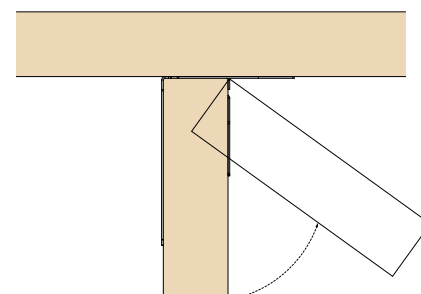

Rotate hanger to angle required. Correct hand must be used.
Please ensure the correct hanger has been selected prior to installing.

ACE

Adjustable Connector Eaves

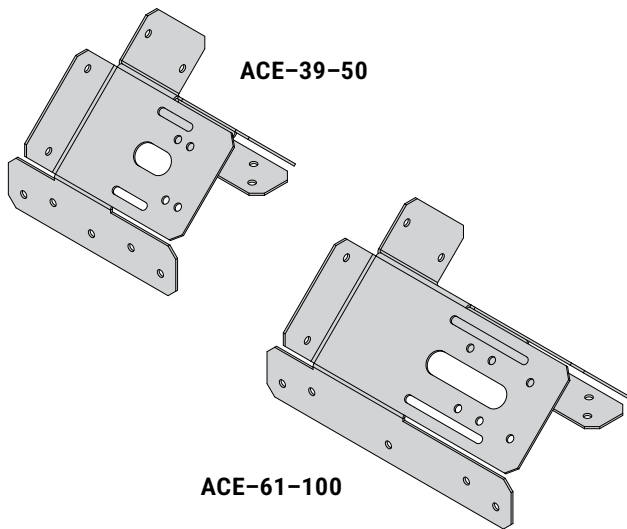


Available Sizes


| Product Code | Min Rafter Width (mm) | Max Rafter Width (mm) |
|--------------|-----------------------|-----------------------|
| ACE-39-50 | 38 | 47 |
| ACE-61-100 | 58 | 97 |

Dimensions (mm)

ACE-39-50

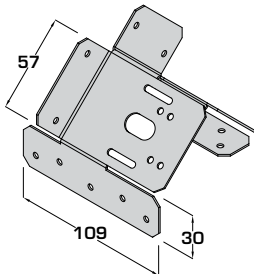

ACE-61-100

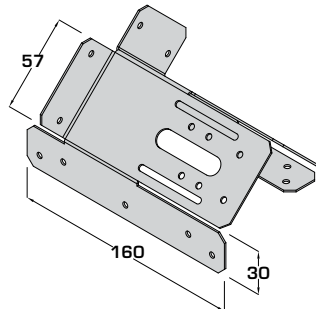

Load Data

| Product Code | Fixings (3.4 x 35mm) | | Load Direction | Characteristic Capacity (kN)** |
|--------------|----------------------|-----------|----------------|--------------------------------|
| | Wallplate | Supported | | Solid Timber Header (Min C16) |
| ACE-39-50 | 9 | 4 | 1 | 2.92 |
| | | | 2 | 5.64 |
| | | | 3 | 2.72 |
| | | | 4 | 2.78 |
| ACE-61-100 | 9 | 4 | 1 | 2.92 |
| | | | 2 | 6.10 |
| | | | 3 | 2.72 |
| | | | 4 | 2.78 |

**Values obtained from tests carried out by ITW Construction Products Offsite and calculated in accordance with ETAG 015.



When pitch is less than 30 degrees a 140mm wall plate will be required. 100mm wall plate suitable for pitches greater than 30 degrees.

The ACE is used to provide a secure connection between the EWP rafter and the wall plate at the eaves.

Features & Benefits

- Eliminates the need for a bevelled wall plate
- Unique part design allows 2 parts to accommodate rafter widths between 38 – 97mm wide

Material Specification

- Galvanised mild steel – Z275


Fixings

| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi


Installation Instructions

Stage 1

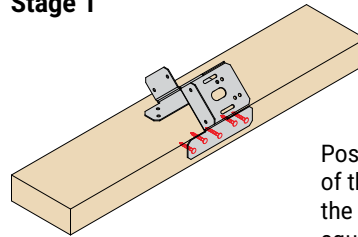


Position the ACE to the outside of the wall plate and nail to the face with 5No 3.4 x 35mm square twist nails.

Stage 2

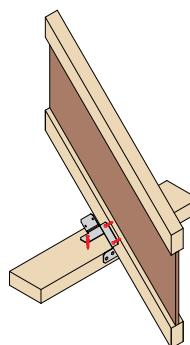

Position the I-Joist rafter and fix into the bottom flange with 2No 3.4 x 35mm square twist nails. On the same side fix into the top of the wall plate with 2No 3.4 x 35mm square twist nails.

Stage 3

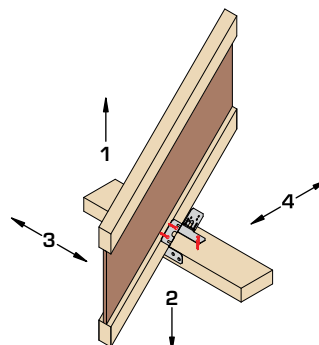


On the opposite side the ACE should be wiped up and nailed into the bottom flange with 2No 3.4 x 35mm square twist nails.

An additional 2No 3.4 x 35mm square twist nails should be fixed into the top of the wall plate.

45L/R

Face Fix 45° Hanger

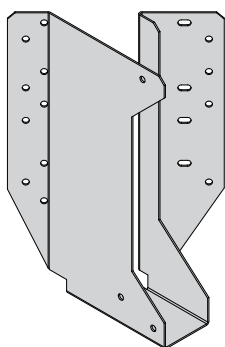

220 – 300MM DEEP



The 45L/R is a pre-skewed 45 degree hanger for timber to timber connections.

Features & Benefits

- Economical solution provides set angle for ease of installation

Material Specification

- Galvanised mild steel – Z275

Fixings

| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |


*For use with Paslode PPNXi

Available Sizes


| Hanger Width (W) (mm) | Hanger Depth (H) (mm) | | | |
|-----------------------|-----------------------|-------------|-------------|-------------|
| | 220 | | 300 | |
| | Left | Right | Left | Right |
| 39 | 45-L-39-220 | 45-R-39-220 | 45-L-39-300 | 45-R-39-300 |
| 50 | 45-L-50-220 | 45-R-50-220 | 45-L-50-300 | 45-R-50-300 |
| 61 | 45-L-61-220 | 45-R-61-220 | – | – |
| 75 | 45-L-75-220 | 45-R-75-220 | 45-L-75-300 | 45-R-75-300 |
| 92 | 45-L-92-220 | 45-R-92-220 | | |

See VS (pages 84 – 85) or VRC (pages 86 – 87) for skewers outwith 45°


Left Hand:

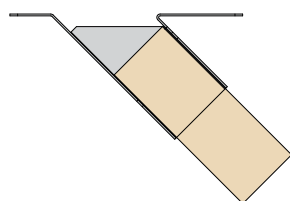

Right Hand:


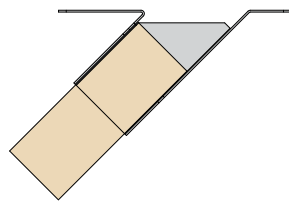


In Situ

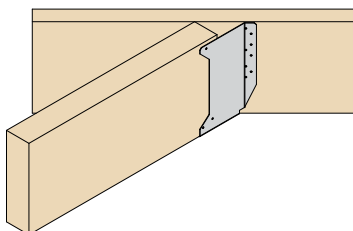

Dimensions (mm)

220–300mm Deep

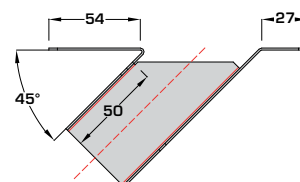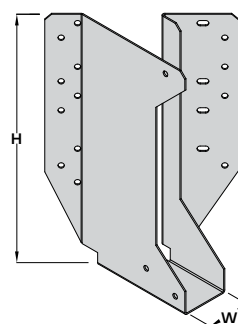


Load Data

| Hanger Depth (H) (mm) | Fixings (3.4 x 35mm) | | Characteristic Capacity (kN) | | | |
|------------------------|----------------------|----------|------------------------------|---|----------------|-------|
| (Depth Dependant Only) | Header | Incoming | Uplift | I-Joist Header With Backer Block (Solid/LVL Flange) | GL (Min GL28h) | LVL |
| 220 | 17 | 3 | 0.99 | 14.92 | 15.48 | 15.48 |
| 300 | 21 | 3 | 0.99 | 17.54 | 16.31 | 16.31 |

UZ CLIP

Noggin Support

Scan or click to view
installation videos

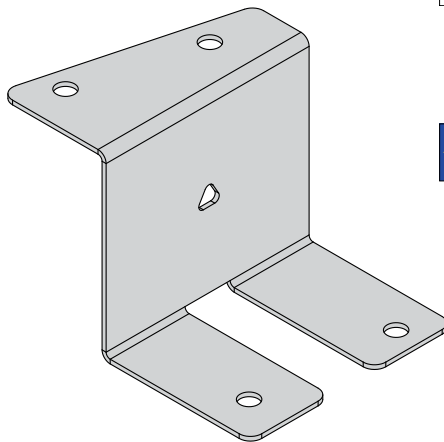

The UZ Clip is a multifunctional connector for supporting solid timber and I-Joist noggins.

Features & Benefits

- Suitable for supporting noggins in various applications
- Adjacent noggins can be aligned without clashing

Material Specification

- Galvanised mild steel – Z275

Fixings


| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi



Available Sizes

| Product Code | Height (H) (mm) |
|--------------|-----------------|
| UZ-35 | 35 |
| UZ-38 | 38 |
| UZ-45 | 45 |
| UZ-47 | 47 |

Dimensions (mm)


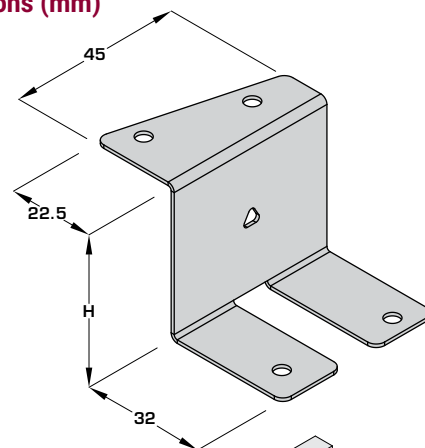


In Situ

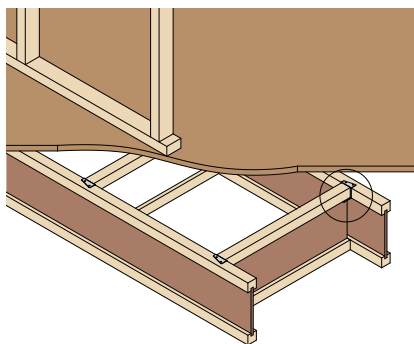



PARTITION NOGGINS

I-Joists / Open Webs Supporting
Lightweight Partitions

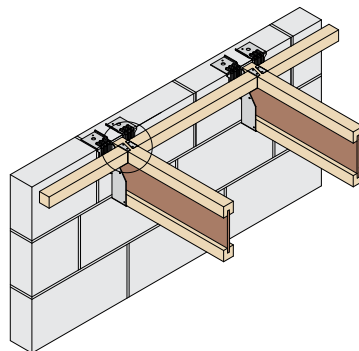

PERIMETER NOGGINS

Support for decking and plasterboard

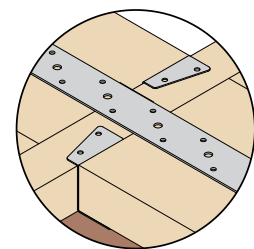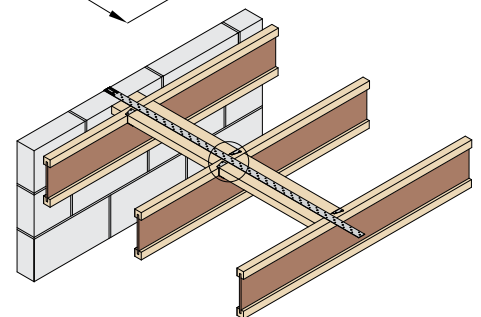

RESTRAINT STRAP NOGGINS

Fixing for perpendicular restraint straps

Refer to manufacturer's guidelines and NHBC Standards for noggin requirements

UZ CLIP

Noggin Support

Load Data


| Noggin Type | Fixings (3.4 x 35mm) | | Characteristic Capacity (kN) |
|--------------|----------------------|----------|------------------------------|
| | Header | Incoming | |
| Solid Timber | 2 | 3 | 2.28 |
| I-Joist | 2 | 2 | 2.73 |

Installation Instructions

Stage 1


I-Joist Noggin

Fix UZ Clip to underside of I-Joist top flange with 2No 3.4 x 35mm square twist nails.

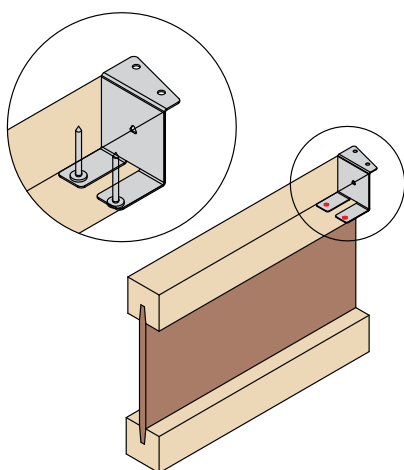


Solid Timber Noggin <50mm Wide

Fix UZ Clip to underside of noggin with 2No 3.4 x 35mm square twist nails. An additional 1No 3.4 x 35mm square twist nail is required in the timber end.

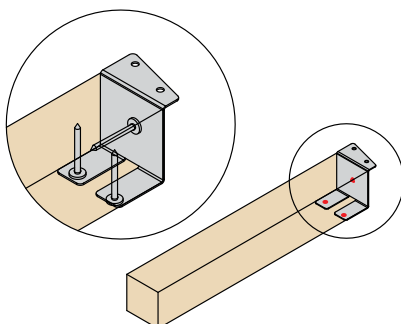

Solid Timber Noggin >50mm Wide


Fix UZ Clip to underside of noggin with 2No 3.4 x 35mm square twist nails. An additional 1No 3.4 x 35mm square twist nail is required in the timber end. UZ Clips should be staggered.

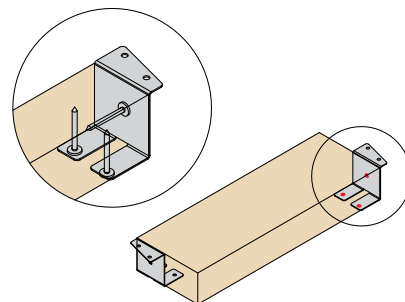

Stage 2


I-Joist Noggin

Nail the UZ Clip to the top of the header joist with 2No 3.4 x 35mm square twist nails.

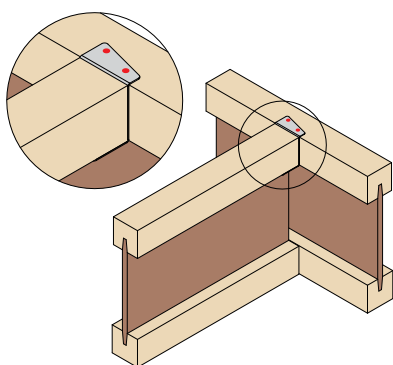

Solid Timber Noggin <50mm Wide


Nail the UZ Clip to the top of the header joist with 2No 3.4 x 35mm square twist nails.

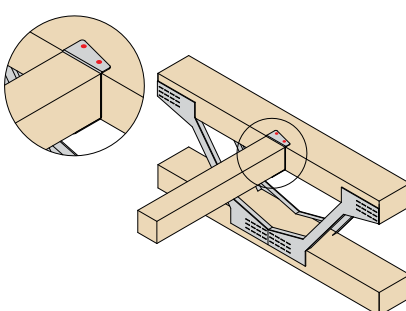

Solid Timber Noggin >50mm Wide

Nail the UZ Clip to the top of the header joist with 2No 3.4 x 35mm square twist nails.


A skew nail fixing will be required on the opposite side (approx. 75mm long).

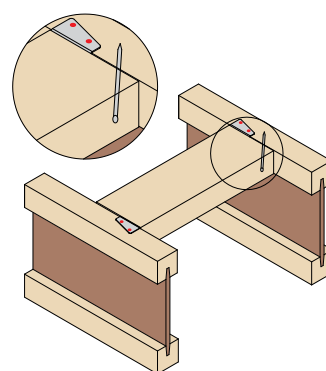

UZ CLIP


Noggin Support with Buttress Wall

In Situ

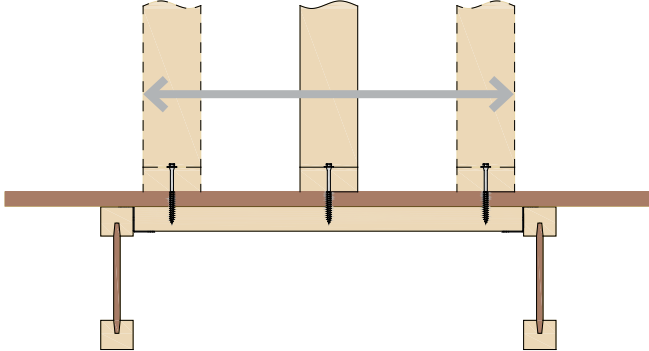

Buttress Wall to Noggin

Bottom rail is secured to the noggin through the floorboard using a PSTS-8x85mm screw.

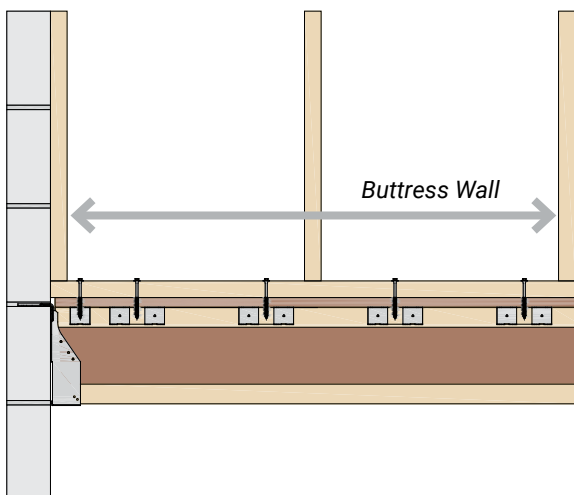

Noggins are evenly spaced between the joists (excluding perimeter noggin) and installed using UZ clips.

Example Calculation

1no. Noggin minimum **38x63mm** fixed with 2no.UZ-clips (1 each end)

Instantaneous design value (Wind kmod 1.1) for noggin (centre or end)

= 1.269kN

Instantaneous design value (Wind kmod 1.1) for Screw fixing PSTS8x85mm (assume panel has 38mm bottom member)


= 1.684kN

Buttress wall with 4 noggins maximum loading

1.269* 4 = 5.076kN

| Noggin Size (mm) | No. of UZ Clips | Characteristic Value (kN) (Horizontal Direction) |
|--------------------|-----------------|--|
| 38 x 63 to 38 x 89 | 2 | 1.5 |
| 38 x 120 | 4 | 2.5 |

*Values are of partition positioned anywhere on the noggin.

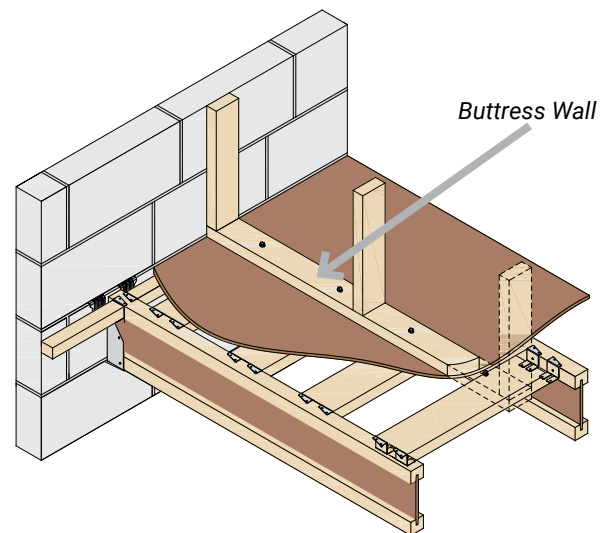

Buttress wall can be positioned off-centre on the noggins.

1no. Noggin minimum **38x120mm** fixed with 4no.UZ-clips (2 each end)

Instantaneous design value (Wind kmod 1.1) for noggin (centre or end)

= 2.115kN

Instantaneous design value (Wind kmod 1.1) for Screw fixing PSTS8x85mm (assume panel has 38mm bottom member)

= 1.684kN


Buttress wall with 4 noggins maximum loading

1.684* 4 = 6.736kN

*Lowest Value of clip/screw used for calculation

I-CLIP

Multiple I-Joist Connector

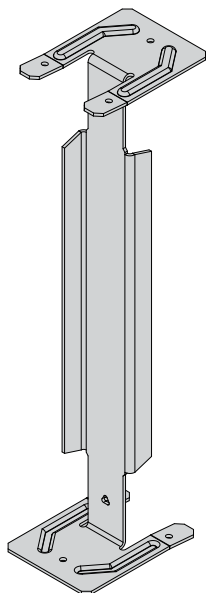

The I-Clip is a single piece connector for joining 2 ply I-Joists together eliminating the need for filler blocks.

Features & Benefits

- Quick and simple to install with flared end for ease of install
- Safely joins joists together allowing them to act as a single unit
- Visible connections to ensure compliance

Material Specification


- Galvanised mild steel – Z275

Fixings


| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi

In Situ

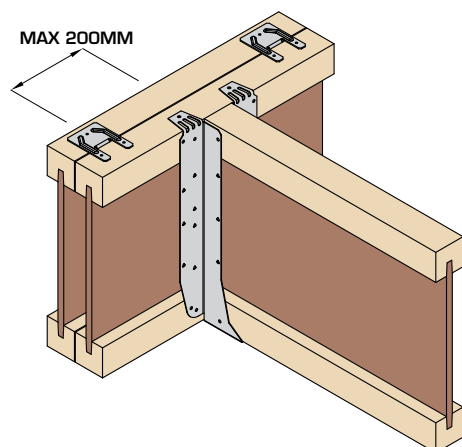


Installation either side of incoming point load to be maximum 200mm from joist edge.

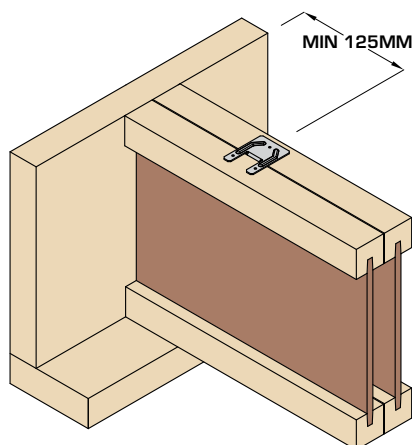

Installation on joist end to be minimum 125mm away from the end of the joist to allow adequate space for fixing.

Dimensions (mm)

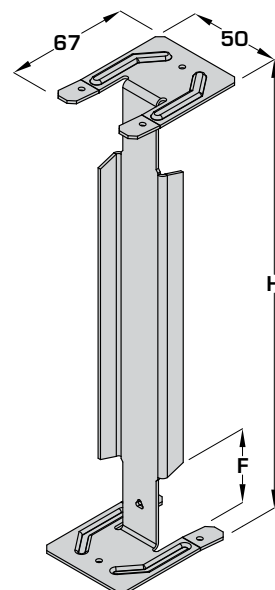

Available Sizes

| Joist Manufacturer | Flange Depth (F) (mm) | | | | | | | |
|---------------------|--------------------------|----------|----------|----------|----------|----------|----------|----------|
| | | 200 | 220 | 235 | 240/241 | 245 | 300/302 | 350 |
| James Jones (JJJ) | 45 | – | I-220-46 | I-235-46 | – | I-245-46 | I-301-46 | I-350-46 |
| Metsawood (FJI) | 36 & 39 | I-200-38 | I-220-38 | – | I-241-38 | – | I-301-38 | – |
| Steico (SJI) | 39 | I-200-38 | I-220-38 | – | I-241-38 | – | I-301-38 | – |
| Masonite/Staircraft | 47 | – | I-220-47 | – | I-241-47 | – | I-301-47 | – |

Part is not width dependent

I-CLIP


Multiple I-Joist Connector



TO BE USED WITH 2 PLY JOISTS ONLY


Load Data

Concentrated Point Load – 1 Pair

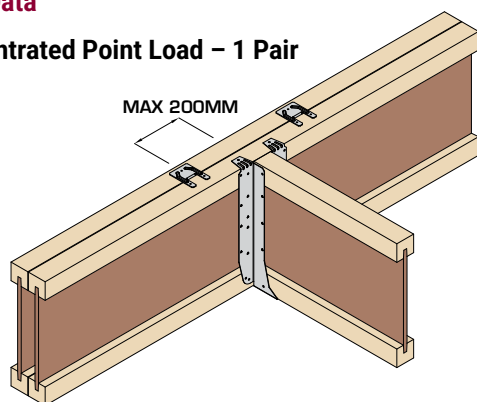


| Fixings (3.4 x 35mm) | | Characteristic Capacity (kN) | |
|-------------------------|---------------------------|------------------------------|-----------------------------|
| Header (per anchor) | Supported (per anchor) | LVL Flange I-Joist | Solid Timber Flange I-Joist |
| 3 | 3 | 18.08 | 14.84 |

Concentrated Point Load – 2 Pairs

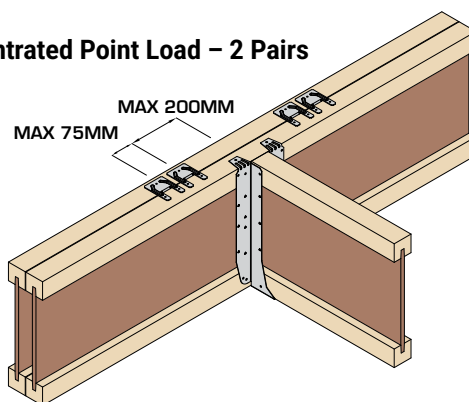


| Fixings (3.4 x 35mm) | | Characteristic Capacity (kN) | |
|-------------------------|---------------------------|------------------------------|-----------------------------|
| Header (per anchor) | Supported (per anchor) | LVL Flange I-Joist | Solid Timber Flange I-Joist |
| 3 | 3 | 27.12 | 22.26 |

Regular Point Loads – 1 Pair

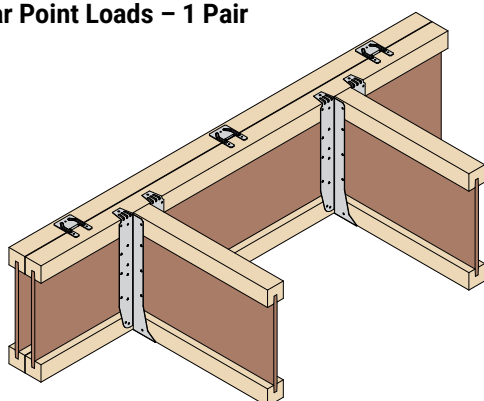

| Fixings (3.4 x 35mm) | | Characteristic Capacity (kN) | |
|-------------------------|---------------------------|------------------------------|-----------------------------|
| Header (per anchor) | Supported (per anchor) | LVL Flange I-Joist | Solid Timber Flange I-Joist |
| 3 | 3 | 9.04 | 7.42 |


Regular Point Loads – 2 Pairs

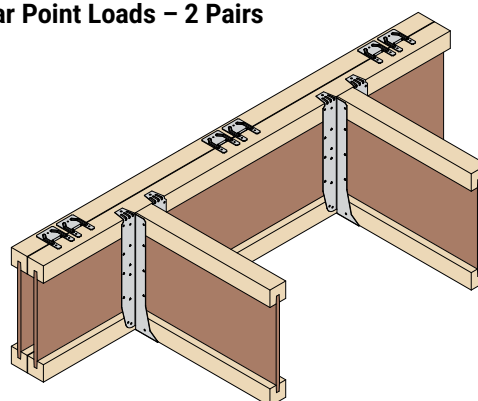

| Fixings (3.4 x 35mm) | | Characteristic Capacity (kN) | |
|-------------------------|---------------------------|------------------------------|-----------------------------|
| Header (per anchor) | Supported (per anchor) | LVL Flange I-Joist | Solid Timber Flange I-Joist |
| 3 | 3 | 13.56 | 11.13 |


Installation Instructions

Stage 1

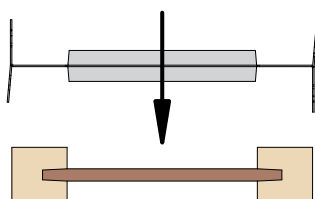


Lay I-Joist flat and mark location of I-Clips, press clips into position on top face of I-Joist.

Stage 2

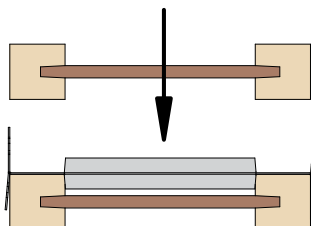

Position second ply of multiple joist on top of I-Clips and tap together with a hammer to ensure a tight fit.

Stage 3

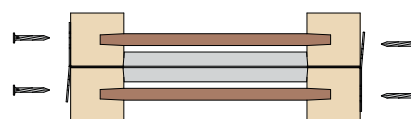

Fix I-Clips to top and bottom flanges of multiple I-Joist using 6No 3.4 x 35mm square twist nails ensuring that I-Joists are fitted tightly together.


OW-CLIP

Multiple Joist Connector

European Community Registered Design



UK
CA

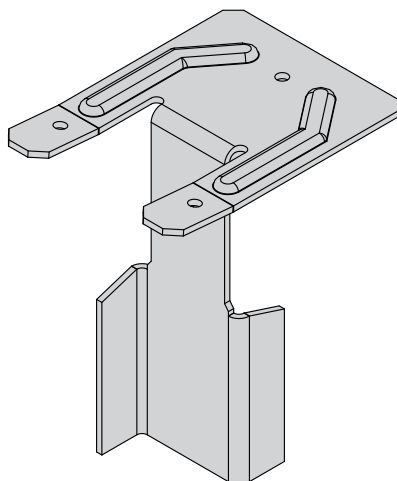

The OW-Clip enables the connection of 2 ply joists allowing them to act as a single unit.

Features & Benefits

- One part can be used for all joist depths and widths
- Flared end for ease of install
- Visible connections to verify compliance

Material Specification

- Galvanised mild steel – Z275

Fixings


| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi

Available Sizes


| Product Code | Flange Depth (F) (mm) |
|--------------|-----------------------|
| OW-Clip-47 | 47 |

Dimensions (mm)

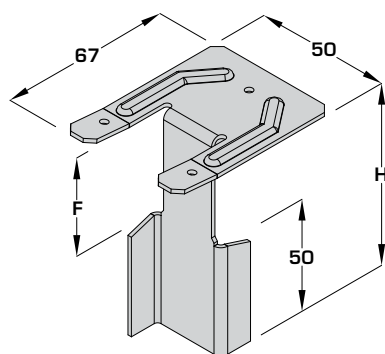

In Situ


2 ply Open Web Connections

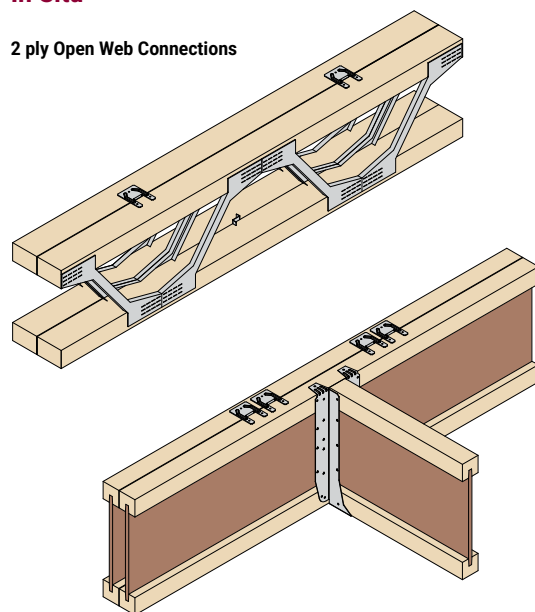

2 ply I-Joist Connections (Masonite & James Jones I-Joists)

Installation Instructions


Stage 1



Lay joist flat and mark location of OW-Clips, press clips into position.


Fix clips to the face of the joist using 1No 3.4 x 35mm square twist nail per clip.

Stage 2

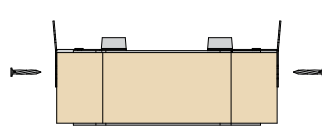


Fix clips to the top of the joist using 1No 3.4 x 35mm square twist nail per clip.

Stage 3



Position second ply of multiple joist on top of the OW-Clips and tap together with a hammer to ensure a tight fit.

Stage 4

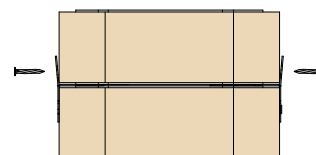


Fix OW-Clips to top and bottom chords of the multiple joist using 2No 3.4 x 35mm square twist nails per clip, ensuring that joists are fitted tightly together.

OW-CLIP

Multiple Joist Connector


Load Data

Concentrated Point Load (Open Web Joists)

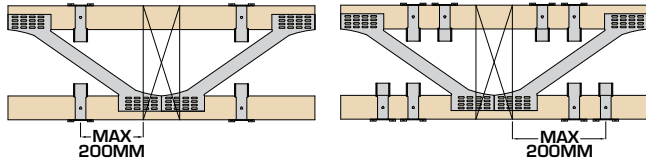


| No of OW- Clips | Fixings (3.4 x 35mm) | | Characteristic Capacity (kN) | |
|-----------------|----------------------|------------------------|------------------------------|-------------------------|
| | Header (per anchor) | Supported (per anchor) | 195 – 280mm Deep Joists | 304 – 424mm Deep Joists |
| 4 | 2 | 2 | 15.60 | 18.90 |
| 8 | 2 | 2 | 23.40 | 28.40 |

Regular Point Loads / UDL (Open Web Joists) (Incoming Joists @400C/C, Clips @600C/C)

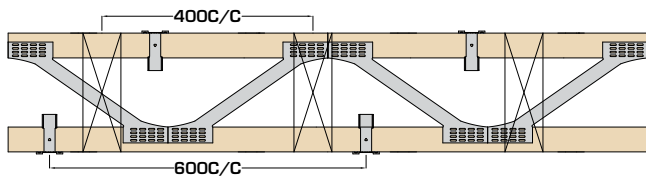

| Fixings (3.4 x 35mm) | | Characteristic Capacity (kN) | | | |
|----------------------|------------------------|------------------------------|----------------|-------------------------|----------------|
| Header (per anchor) | Supported (per anchor) | 195 – 280mm Deep Joists | | 304 – 424mm Deep Joists | |
| | | Max Point Load (kN) | Max UDL (kN/m) | Max Point Load (kN) | Max UDL (kN/m) |
| 2 | 2 | 5.20 | 13.00 | 6.32 | 15.80 |

Regular Point Loads / UDL (Open Web Joists) (Incoming Joists @600C/C, Clips @600C/C)

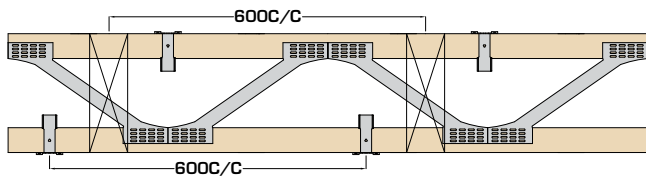


| Fixings (3.4 x 35mm) | | Characteristic Capacity (kN) | | | |
|----------------------|------------------------|------------------------------|----------------|-------------------------|----------------|
| Header (per anchor) | Supported (per anchor) | 195 – 280mm Deep Joists | | 304 – 424mm Deep Joists | |
| | | Max Point Load (kN) | Max UDL (kN/m) | Max Point Load (kN) | Max UDL (kN/m) |
| 2 | 2 | 7.80 | 13.00 | 9.48 | 15.80 |




TO BE USED WITH 2 PLY JOISTS ONLY

Concentrated Point Load (Masonite I-Joists)

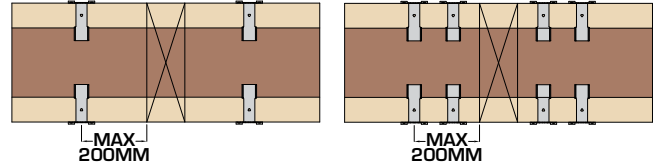


| No of OW- Clips | Fixings (3.4 x 35mm) | | Characteristic Capacity (kN) |
|-----------------|----------------------|------------------------|------------------------------|
| | Header (per anchor) | Supported (per anchor) | |
| 4 | 2 | 2 | 12.36 |
| 8 | 2 | 2 | 18.54 |

Regular Point Loads / UDL (Masonite I-Joists) (Incoming Joists @400C/C, Clips @600C/C)

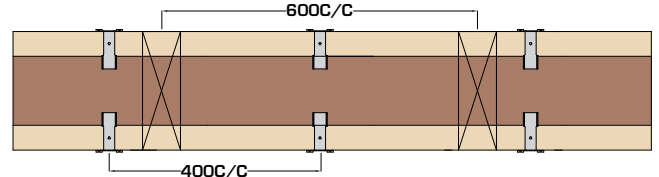

| Fixings (3.4 x 35mm) | | Characteristic Capacity (kN) | |
|----------------------|------------------------|------------------------------|--------------|
| Header (per anchor) | Supported (per anchor) | Max Point Load (kN) | Max UDL (kN) |
| 2 | 2 | 6.18 | 15.45 |

Regular Point Loads / UDL (Masonite I-Joists) (Incoming Joists @600C/C, Clips @600C/C)

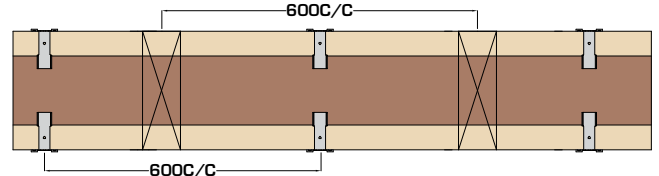

| Fixings (3.4 x 35mm) | | Characteristic Capacity (kN) | |
|----------------------|------------------------|------------------------------|--------------|
| Header (per anchor) | Supported (per anchor) | Max Point Load (kN) | Max UDL (kN) |
| 2 | 2 | 6.18 | 10.30 |

PSTS

Multiple Connections




The Paslode Structural Screws are for use in various applications in timber frame where multiple members are required; typically trimmer joists, multiple floor joists, lintels and multiple girders.



Features & Benefits

- Requires no pre-drilling
- Quick and easy to install
- Connect up to 4ply joists and trusses from one side only
- Upgraded to improve withdrawal and shear load capabilities, increase speed of installation and to meet the design requirements of Eurocode 5
- Large diameter flanges under heads ensure very high resistance to pull-through loads

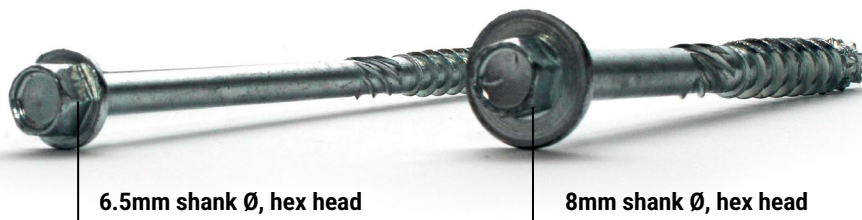

6.5mm shank Ø, hex head

8mm shank Ø, hex head

Available Sizes


| Product Code | Reference | Length (L) (mm) | Box Qty* |
|--------------|-------------|-----------------|----------|
| 551124 | PSTS6.5x35 | 35 | 100 |
| 551105 | PSTS6.5x65 | 65 | 100 |
| 551106 | PSTS6.5x100 | 100 | 100 |
| 551102 | PSTS6.5x115 | 115 | 100 |
| 551107 | PSTS6.5x150 | 150 | 100 |
| 551108 | PSTS6.5x200 | 200 | 100 |
| 551109 | PSTS6.5x250 | 250 | 100 |

| Product Code | Reference | Length (L) (mm) | Box Qty* |
|--------------|-----------|-----------------|----------|
| 551110 | PSTS8x65 | 65 | 100 |
| 551103 | PSTS8x85 | 85 | 100 |
| 551111 | PSTS8x100 | 100 | 100 |
| 551112 | PSTS8x135 | 135 | 100 |
| 551116 | PSTS8x175 | 175 | 100 |

Dimensions (mm)

Hex Head Screws

| | PSTS6.5 (mm) | | PSTS8.0 (mm) |
|----------------|--------------|-----------|--------------|
| | 35 – 65 | 100 – 250 | |
| d | 6.50 | | 8.00 |
| d ₁ | 4.40 | | 5.25 |
| d ² | 4.80 | | 5.85 |
| d _h | 11.50 | | 16.00 |
| l _g | 30.00 | 50.00 | 52.00 |

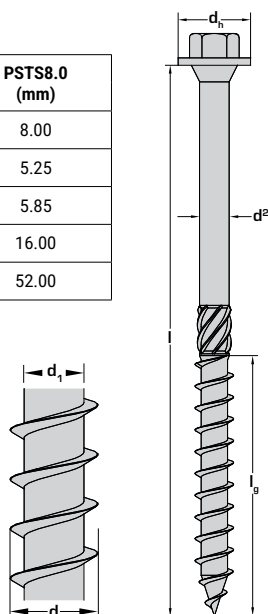

PSTS

Multiple Connections

Characteristic Parameters For Calculation To Eurocode 5

| | PSTS 6.5mm | PSTS 8.0mm |
|---|-------------------------|-------------------------|
| Characteristic yield moment ($M_{y,k}$) | 16.78 kN/mm | 25.29 kN/mm |
| Characteristic withdrawal parameter ($f_{ax,k}$) | 16.02 N/mm ² | 15.98 N/mm ² |
| Characteristic head pull through parameter ($f_{head,k}$) | 26.63 N/mm ² | 26.22 N/mm ² |

1. All data included is based on tests in accordance with EN14592.

2. Paslode Structural Tests are CE marked in accordance with EN14592 following testing at TRADA Technology. For applications outside the scope of those specified please contact our Technical Department.


Connecting Multiple Open Web Joists With PSTS 6.5mm Ø

- Screws must be installed precisely at the vertical centre of the chord.
- Washer head should meet flush with the face of the timber.
- All load values assume TR26 timber.



TO BE USED WITH 2 PLY JOISTS ONLY WITH A MINIMUM CHORD DEPTH OF 47mm



Regular Points Loads / UDL

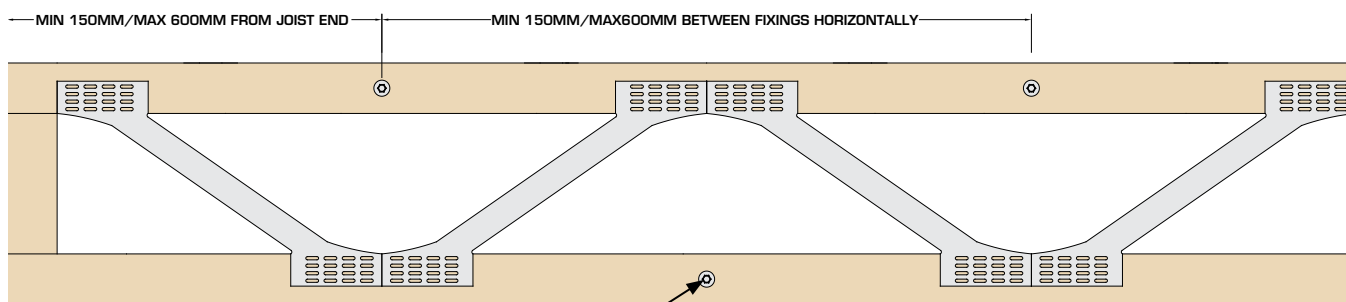

PSTS screws should be installed into both top and bottom chords ensuring a fastener is located within each V section.

| Open Web Connection – Fasteners to Top & Bottom Chords* | Length of Paslode STS 6.5mm | Characteristic Capacity (kN) Per Fixing |
|---|-----------------------------|--|
| 2-ply 72mm wide Open Web Joists | 115 | 2.28 |
| 2-ply 97mm wide Open Web Joists | 150 | 2.28 |
| 2-ply 122mm wide Open Web Joists | 200 | 1.65 |
| 2-ply 147mm wide Open Web Joists | 250 | 1.65 |

Concentrated Point Load

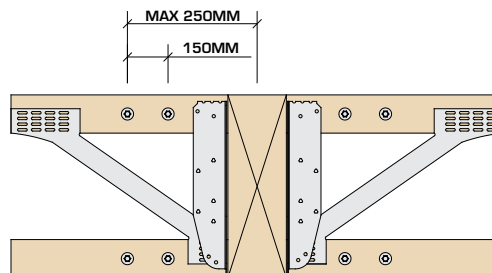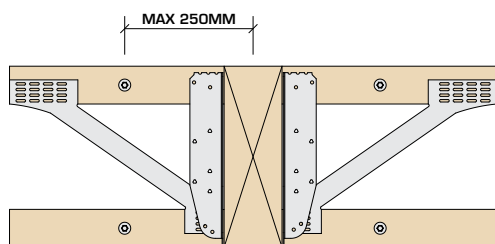


| Open Web Connection – Fasteners to Top & Bottom Chords | Length of Paslode STS 6.5mm | Characteristic Capacity (kN) | |
|--|-----------------------------|------------------------------|----------|
| | | 4 screws | 8 screws |
| 2-ply 72mm wide Open Web Joists | 115 | 18.24 | 36.48 |
| 2-ply 97mm wide Open Web Joists | 150 | 18.24 | 36.48 |
| 2-ply 122mm wide Open Web Joists | 200 | 13.20 | 26.40 |

PSTS

Multiple Connections

Connecting Multiple Glulam & Solid Timber Members With PSTS 8mm Ø

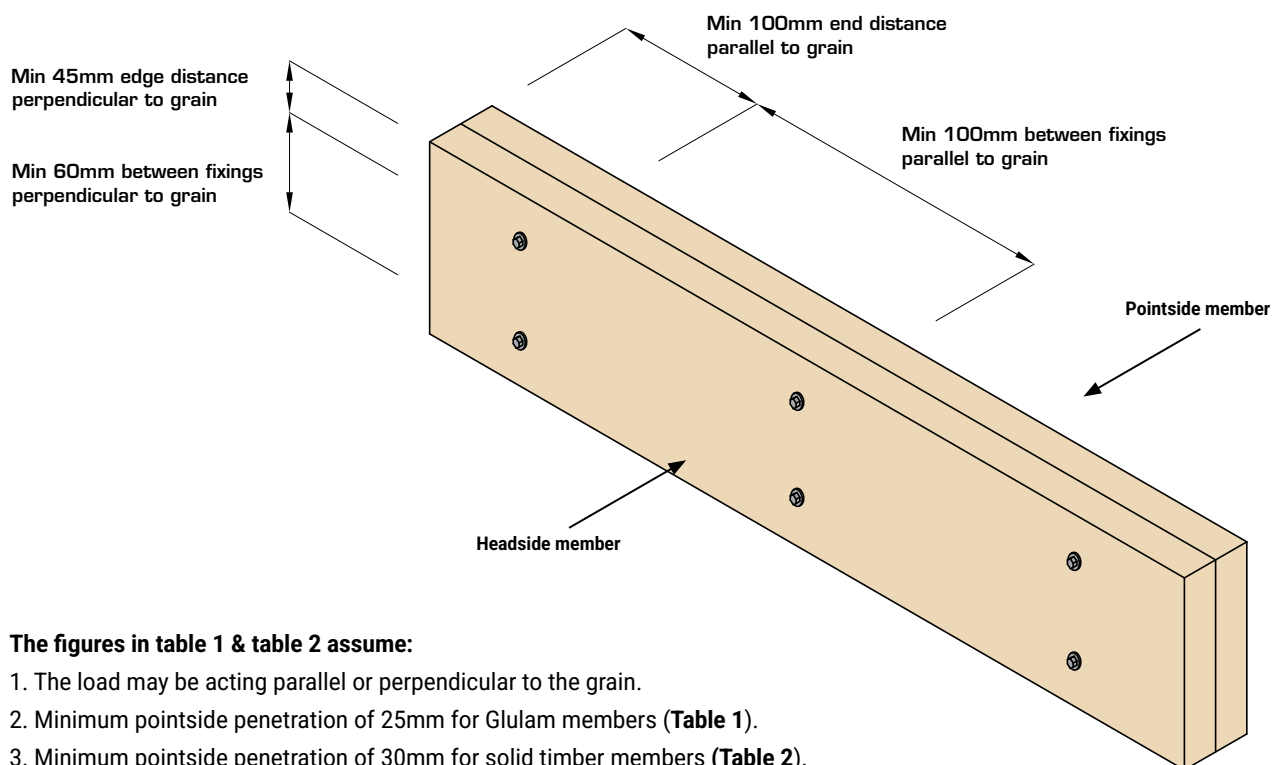

The figures in table 1 & table 2 assume:

1. The load may be acting parallel or perpendicular to the grain.
2. Minimum pointside penetration of 25mm for Glulam members (Table 1).
3. Minimum pointside penetration of 30mm for solid timber members (Table 2).

PSTS 8.0mm – Lateral Load-carrying Capacities – Glulam (Table 1)

Long-term permissible lateral load for a single Paslode STS 8.0mm for common combinations of 2 member joints in Glulam (GL28).

| Thickness of Headside Member (mm) | Thickness of Pointside Member (mm) | Length of Paslode STS 8.0mm | Long-Term Permissible Lateral Load-Carrying Capacity (kN) Per Fixing Characteristic Capacity |
|-----------------------------------|------------------------------------|-----------------------------|--|
| 38 | 38 | 65 | 2.18 |
| 45 | 45 | 85 | 2.92 |
| 38 | 75 | 100 | 2.99 |
| 75 | 75 | 135 | 3.51 |

PSTS 8.0mm – Lateral Load-carrying Capacities – Solid Timber (Table 2)

Long-term permissible lateral load for a single Paslode STS 8.0mm for common combinations of 2 member joints in solid timber (TR26).

| Thickness of Headside Member (mm) | Thickness of Pointside Member (mm) | Length of Paslode STS 8.0mm | Long-Term Permissible Lateral Load-Carrying Capacity (kN) Per Fixing Characteristic Capacity |
|-----------------------------------|------------------------------------|-----------------------------|--|
| 35 | 35 | 65 | 2.07 |
| 45 | 45 | 85 | 2.72 |
| 47 | 47 | 85 | 2.69 |
| 75 | 75 | 135 | 3.32 |

PSTS

Multiple Connections

Layout of Paslode STS 8.0mm In Bottom Chords

Figure 1 – Bottom Chords Depths of 72mm, 84mm or 97mm




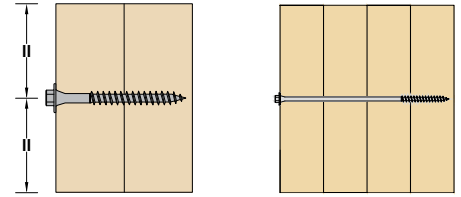


Figure 2 – Bottom Chords Depths of 122mm, 147mm, 172mm, 197mm or 222mm

Figure 4 – Top Chords/Webs of Depths 122mm, 147mm, 172mm, 197mm or 222mm

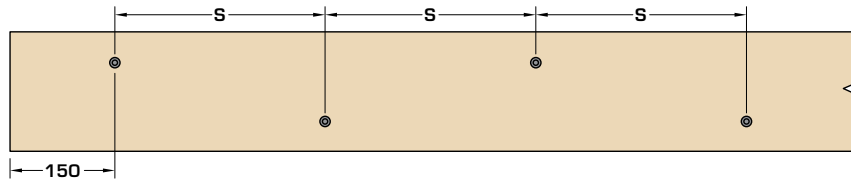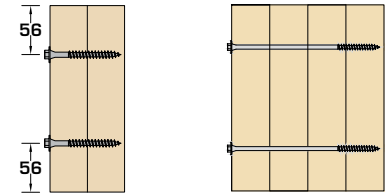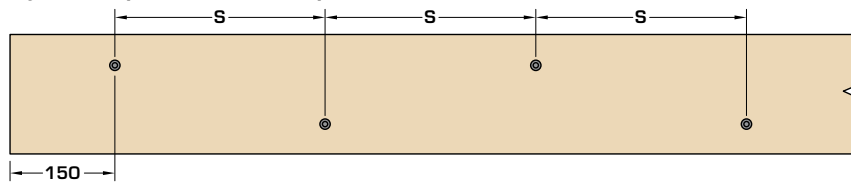

Layout of Paslode STS 8.0mm In Webs & Top Chords

Figure 3 – Top Chords/Webs of Depths 72mm, 84mm or 97mm




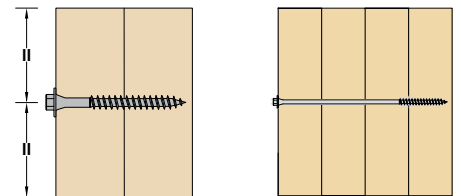



Figure 4 – Top Chords/Webs of Depths 122mm, 147mm, 172mm, 197mm or 222mm

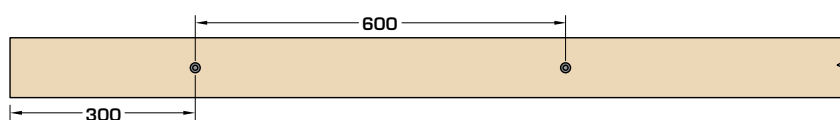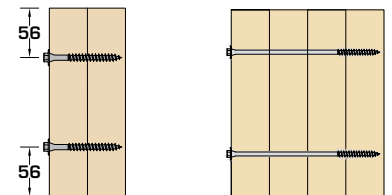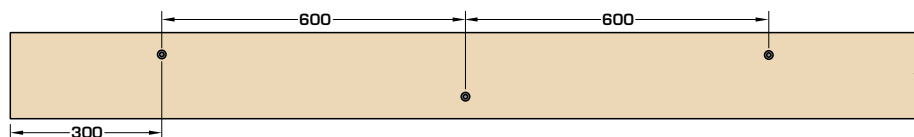

FASTENERS CAN BE INSTALLED FROM ONE SIDE OF GIRDER TRUSS
For further information please contact Technical Support.


Installation Instructions

Stage 1

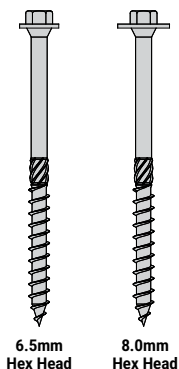


Select the correct fastener type and size.

Stage 2

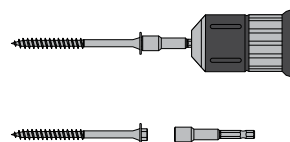


Install using an impact driver.

Stage 3

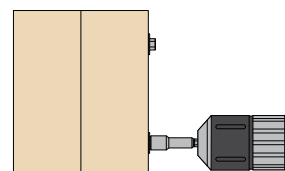

Bring the underside of the washer head flush with the timber surface.

Stage 4

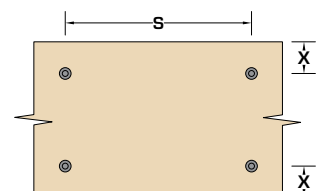

Always maintain the required minimum edge distance and spacing.



Do not countersink or overdrive.




These values vary – please refer to relevant details.

SHI

Service Hole I-Joist

GB Patent: 2496059B

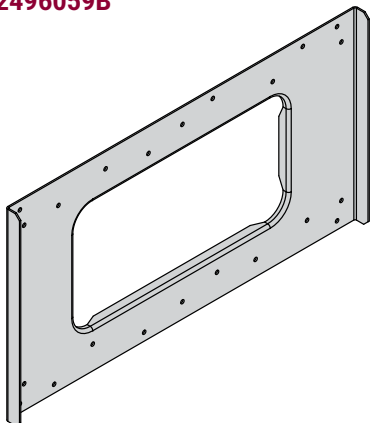

The SHI plate is a reinforcement plate that allows large apertures to be cut into an I-Joist web to accommodate service runs.

Features & Benefits

- Allows larger apertures to be cut into I-Joist web whilst providing additional strength and stiffness to the I-Joist
- Potential remedial solution for damaged webs (Contact your system provider for further information)

Material Specification

- Galvanised mild steel – Z275

Fixings

| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi

Available Sizes

| Product Code | Product Description | I-Joist Depth (mm) | Dimensions (mm) | |
|--------------|---------------------|--------------------|-----------------|-----|
| | | | H | F |
| 548377 | SHI-220-1 | 220 | 215 | 127 |
| 548380 | SHI-240-1 | 240/245 | 240 | 152 |
| 548381 | SHI-300-1 | 300 | 300 | 207 |

Suitable for use with JJI (45mm flange), SJI (39mm flange) and FJI (36 & 39mm flange). Contact Technical Support for use with multiple ply members.


The use of SHI plates must be assessed for suitability by a qualified design professional.



Please contact your system provider for further information on assessing joist suitability.

Product is not suitable for use on solid timber / solid engineered timber sections.

Dimensions (mm)

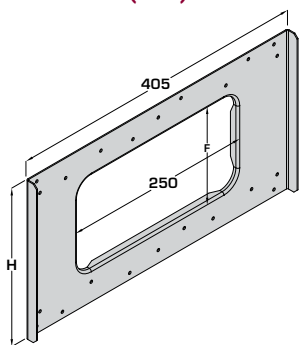

In Situ


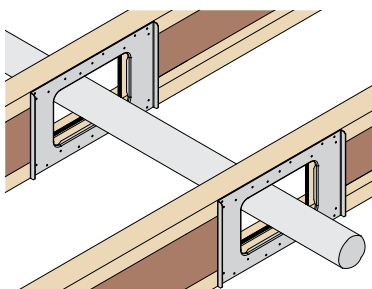


Plate required each side of aperture.




Position SHI plate at least 90mm from joist end to ensure it does not clash with masonry hanger or end seal (suitable for use with Hi-Vis Gripper).

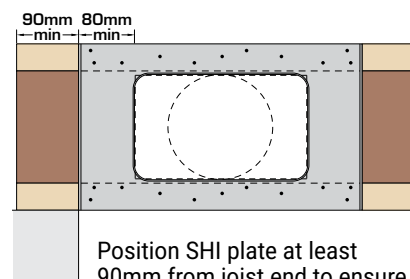

Please ensure the SHI plates are not installed within the masonry wall/mortar


Installation Instructions

Stage 1

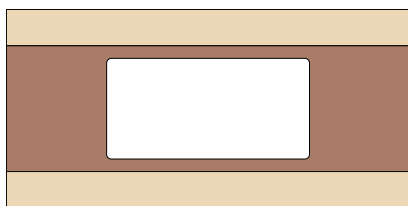


Using the SHI plate as a template, drill 4No holes and cut inner aperture to suit.

Stage 2

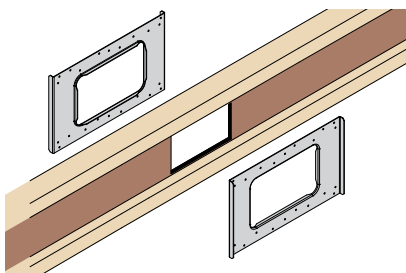


Place 1No SHI plate either side of the aperture.

Stage 3

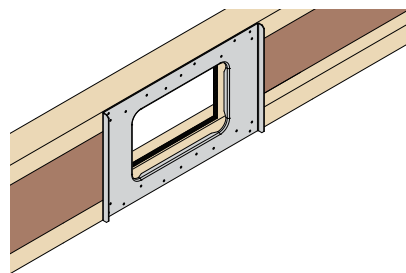


Fix the SHI plates to the I-Joist with 22No 3.4 x 35mm square twist nails per plate.

Solid Timber/Roof Truss Overview

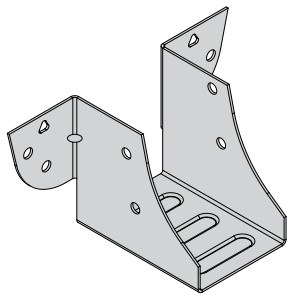


KM
Page 104

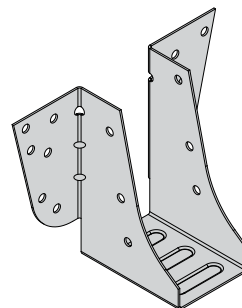


TM
Page 105


COMPACT SOLUTIONS

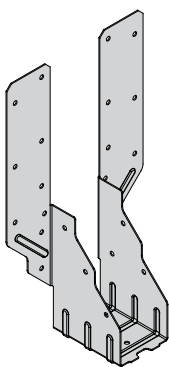


TS
Page 106

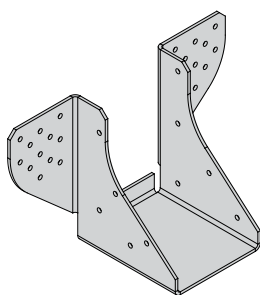

HMH
Page 107

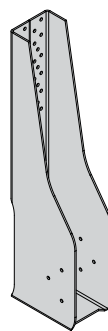

HGG
Page 108

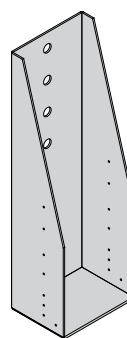


VHGG
Page 109


STANDARD TRUSS

HIGH LOAD TRUSS

VERY HIGH LOAD TRUSS

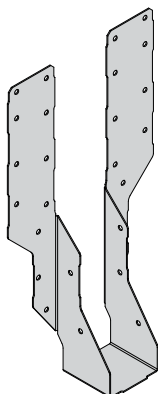


KH
Page 110

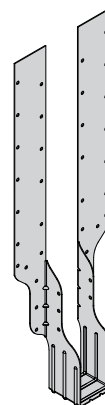


KHL
Page 111

KWIKI

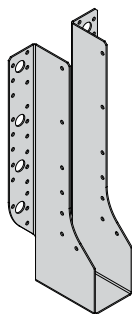


MHE
Pages 112 – 113

FACE FIX

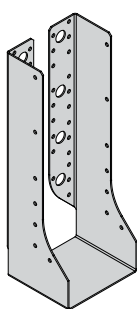


MHI
Pages 112 – 113

INTERNAL FLANGE

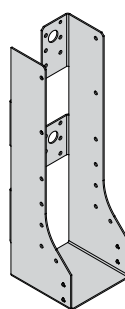


MHIC
Pages 112 – 113

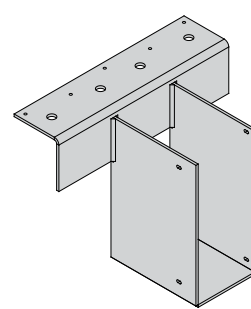


FTHI
Page 114

HIGH LOAD TRUSS

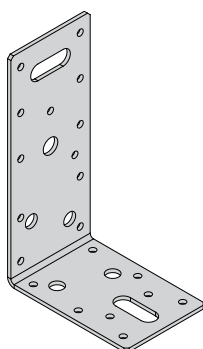


LAB
Page 115

ANGLE BRACKETS

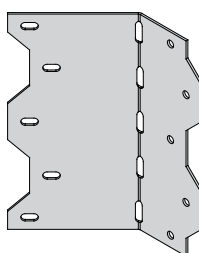


SA-45
Page 116

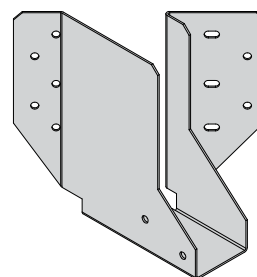


45L/R
Page 117


SKEWED

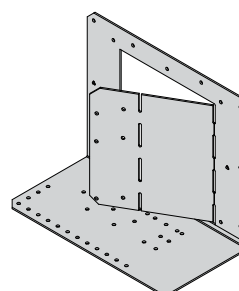

VS
Pages 118 – 119

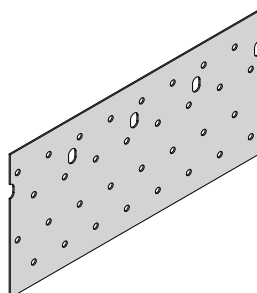

NP
Page 120

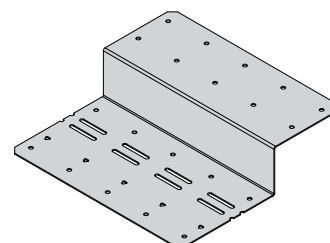


SB
Page 121

ANCILLARY

KM

Mini Hanger

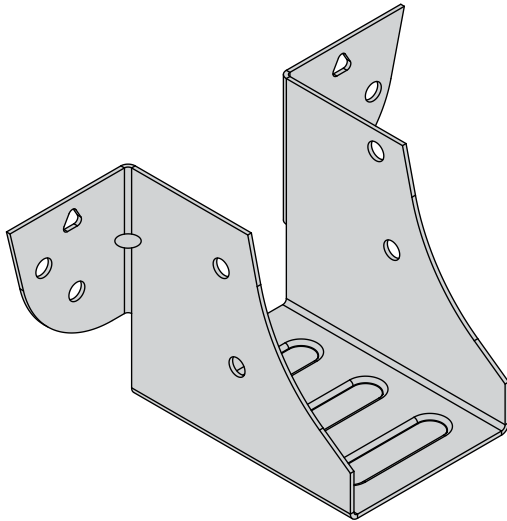

The KM hanger is used to support joists and trusses where a compact economical connector is required.

Features & Benefits

- New and improved design achieves higher load carrying capacities
- Additional side fixings allow for increased uplift capacity
- Optional triangular holes for increased performance on solid headers
- Rear location tab to assist with installation

Material Specification

- Galvanised mild steel – Z275

Fixings


| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi


Available Sizes

| Product Code | Hanger Width (W) (mm) | Hanger Depth (H) (mm) |
|--------------|-----------------------|-----------------------|
| KM-38 | 38 | 49 |
| KM-44 | 44 | 46 |
| KM-50 | 50 | 43 |

In Situ

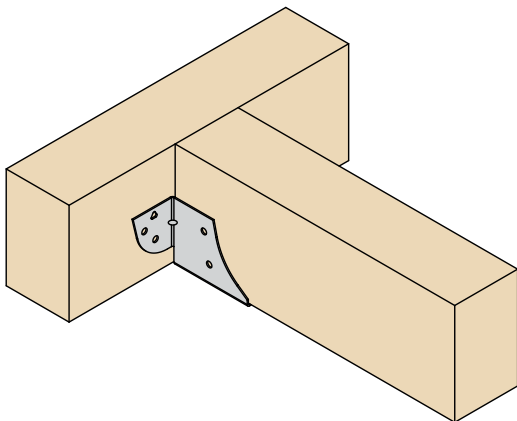

Dimensions (mm)

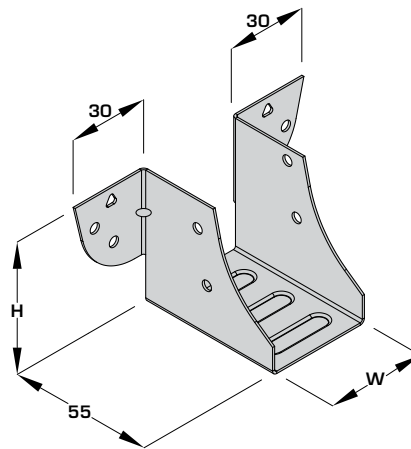

Load Data


| Product Code | Fixings (3.4 x 35mm) | | Characteristic Capacity (kN)** | | Minimum Supporting Depth (mm) | Minimum Supported Depth (mm) to achieve Full Uplift Capacity |
|--------------|----------------------|----------|--------------------------------|------------------------------------|-------------------------------|--|
| | Header | Incoming | Uplift | Solid Timber Header (Min TR26/C27) | | |
| KM-38 | 6 | 4 | 2.20 | 3.41 | 49 | 49 |
| KM-44 | | | | | 46 | 46 |
| KM-50 | | | | | 43 | 43 |

**Values obtained from tests carried out by ITW Construction Products Offsite and calculated in accordance with ETAG 015.

Values apply to new design only. Please contact Technical Support for further information if required.

TM

Midi Shoe

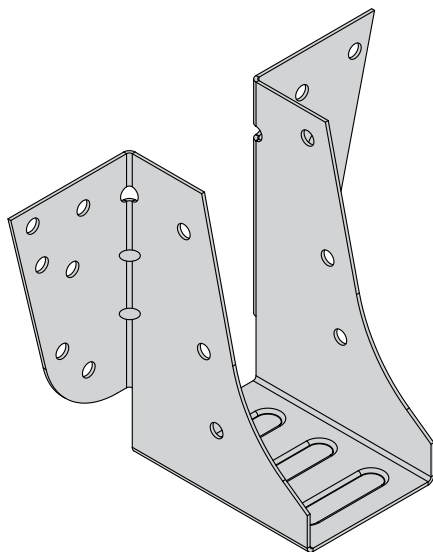

The TM hanger is used to support trusses in lower load applications from bottom chord depths 97mm and above.

Features & Benefits

- New and improved design achieves higher load carrying capacities
- Additional side fixings allow for increased uplift capacity
- Rear location tab to assist with installation
- Economical solution for lower load applications

Material Specification

- Galvanised mild steel – Z275

Fixings


| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi

Available Sizes


| Product Code | Hanger Width (W) (mm) | Hanger Depth (H) (mm) |
|--------------|-----------------------|-----------------------|
| TM-38 | 38 | 81 |
| TM-44 | 44 | 78 |
| TM-50 | 50 | 75 |

Dimensions (mm)

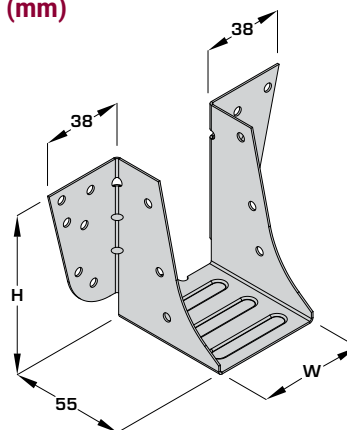

New 45 degree skew nailing
(other nails omitted for clarity)

In Situ

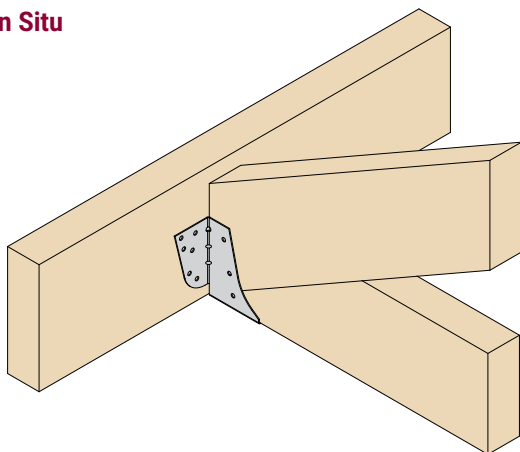

(plates omitted for clarity)

Load Data


| Product Code | Fixings (3.4 x 35mm) | | | Characteristic Capacity (kN)** | | Minimum Supporting Depth (mm) | Minimum Supported Depth (mm) to achieve Full Uplift Capacity |
|--------------|----------------------|------------|----------|--------------------------------|-------------------------------|-------------------------------|--|
| | Header | Skew Nails | Incoming | Uplift | Solid Timber Header (Min C16) | | |
| TM-38 | 12 | 2 | 6 | 3.32 | 9.54 | 81 | 81 |
| TM-44 | | | | | | 78 | 78 |
| TM-50 | | | | | | 75 | 75 |

**Values obtained from tests carried out by ITW Construction Products Offsite and calculated in accordance with ETAG 015.

Values apply to new design only. Please contact Technical Support for further information if required.

TS

Truss Shoe

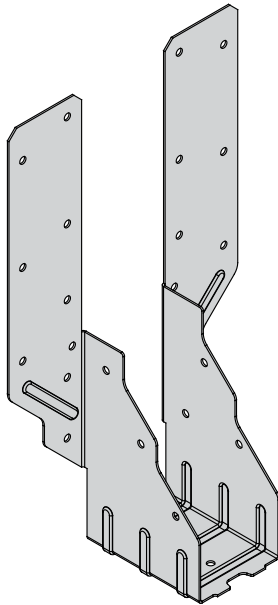

The TS hanger is designed to support trussed rafters from primary girders.

Features & Benefits

- 4 sizes available to suit standard single or double trussed rafters
- Allows design loading to be effectively transferred without local over stressing
- The high performance nail configuration minimises any direct deflection or rotation caused by the incoming truss not abutting the primary girder

Material Specification

- Galvanised mild steel – Z275

Fixings

| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi


Available Sizes

| Product Code | Minimum Header Depth* (mm) | Dimensions (mm) | | |
|--------------|----------------------------|-----------------|-----|-----|
| | | (W) | (H) | (F) |
| TS-38 | 120 | 38 | 256 | 120 |
| TS-50 | 120 | 50 | 250 | 114 |
| TS-75 | 120 | 75 | 237 | 101 |
| TS-100 | 89 | 100 | 225 | 89 |

**When timber depth is shallower than 'F' dimension a timber packer is required.


Nail packer to truss with 3No fixings into front ply, 3No fixings into rear ply using Paslode annular ring shank 2.8 x 63mm.

Dimensions (mm)

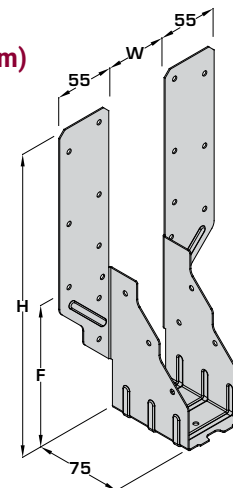


In Situ

Standard Installation:

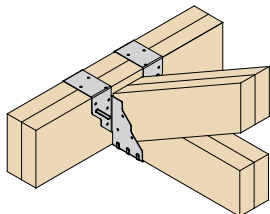


Timber depth greater than 'F' dimension


Face Fix Installation:

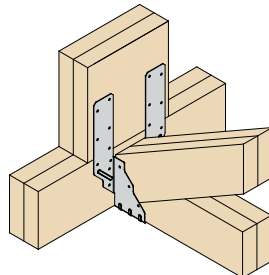

Single Leg Face Fix Installation:

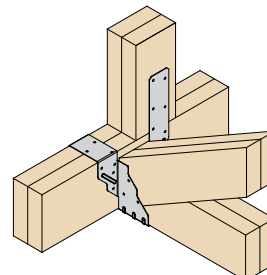

With Packer Installation**:

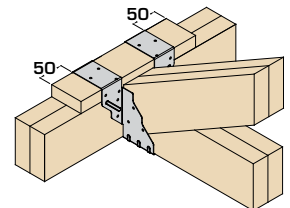


Load Data


| Product Code | Fixings (3.4 x 35mm) | | Characteristic Capacity (kN) | |
|-----------------------------|----------------------|----------|------------------------------|-------------------------------|
| | Header | Incoming | Uplift | Solid Timber Header (Min C20) |
| TS-38, TS-50, TS-75, TS-100 | 18 | 6 | 5.62 | 15.52 |

HMH

Heavy Multi Hanger

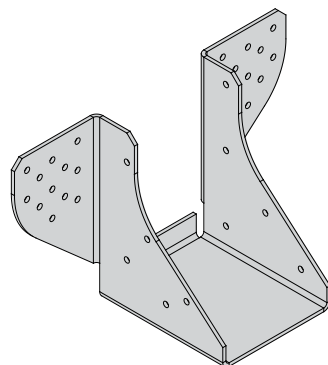

122 & 147mm Deep

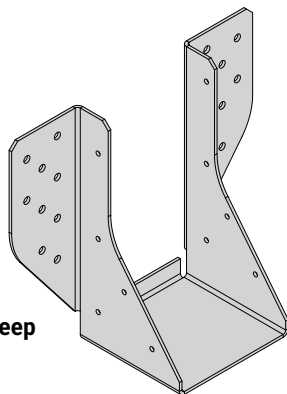

197mm Deep



The HMH hanger is designed to support multiple trusses connecting to girders in medium to high load situations.

Features & Benefits

- High load capacity can be achieved with fixings into the bottom chord only
- A variety of fixing details allows increased performance

Material Specification

- Galvanised mild steel – Z275

Fixings

All fixings supplied with hanger

| Depth | Description |
|-------|--------------------------------------|
| 122mm | 3.35 x 50mm Annular Ring Shank Nails |
| 147mm | 3.35 x 50mm Annular Ring Shank Nails |
| 197mm | Paslode PSTS 6.5 x 65mm |


Available Sizes

| Hanger Width (W) (mm) | Hanger Depth (mm) | | |
|--------------------------|-------------------|-------------|-------------|
| | 122 | 147 | 197 |
| 80 | HMH-80-122 | HMH-80-147 | HMH-80-197 |
| 102 | HMH-102-122 | HMH-102-147 | HMH-102-197 |
| 118 | – | HMH-118-147 | HMH-118-197 |
| 153 | – | HMH-153-147 | HMH-153-197 |
| 198 | – | – | HMH-198-197 |

Dimensions (mm)


122 & 147mm deep – 4mm Ø holes

197mm deep – 6mm Ø holes

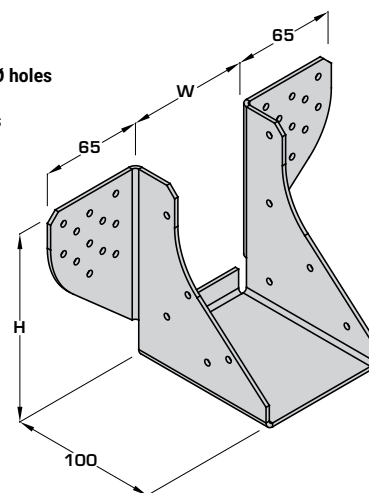


In Situ

Bottom Chord Fixing:

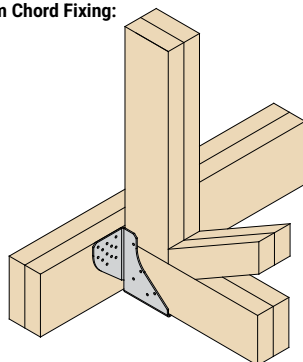

Ridge Connections:

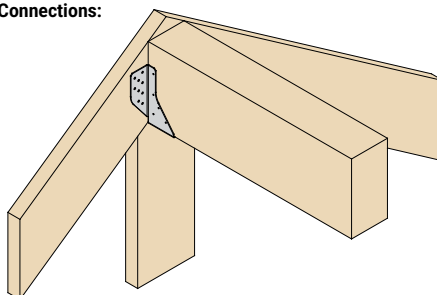

Please discuss suitability with Technical Support

Load Data


| Hanger Depth (mm) | Dimensions (mm) | Fixings | | Characteristic Capacity (kN) | |
|-------------------|-----------------|-----------------------------|--------------------------|------------------------------|-----------------------------------|
| | H | Header (3.35 x 50mm) | Incoming (3.4 x 35mm) | Uplift** | Solid Timber Header (Min TR26) |
| 122 | 122 | 24 | 10 | 9.83 | 26.08 |
| 147 | 145 | 34 | 10 | 9.83 | 32.45 |
| | | Header (PSTS 6.5 x 65mm) | Incoming (3.4 x 35mm) | | |
| 197 | 195 | 18* | 10 | 9.83 | 39.49 |

**Supported timber must be at least hanger height to achieve full uplift capacity. For reduced fixing capacity please contact Cullen Technical. Incoming trusses must be connected together to act as a single unit.

*Screw has an outer diameter of 6.5mm to be driven through 6mm diameter hole.

HGG

Heavy Girder To Girder

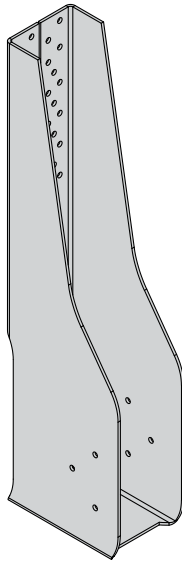

The HGG hanger is designed to support multiple ply girder trusses from a vertical web in high load situations.

Features & Benefits

- New and improved design using PSTS screws simplifies the installation
- Allows fixings into vertical web only
- Additional side fixings allows for greater uplift capacity


Material Specification

- Galvanised mild steel – Z275

Fixings

40No Paslode PSTS 6.5 x 65mm supplied with hanger

Dimensions (mm)

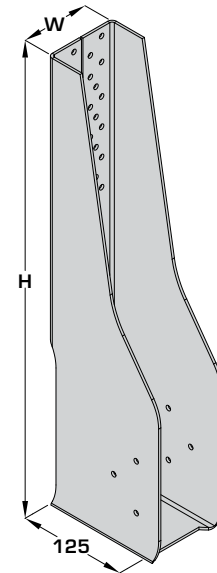


Available Sizes

| Product Code | Incoming Truss Width | Minimum Header Width (mm) | Hanger Width (W) (mm) | Hanger Depth (H) (mm) |
|--------------|----------------------|---------------------------|-----------------------|-----------------------|
| HGG-80 | 2No 35 | 97 | 80 | 519 |
| HGG-102 | 2No 47 | 122 | 102 | 508 |
| HGG-153 | 3No 47 | 147 | 153 | 542 |
| HGG-200 | 4No 47 | 197 | 200 | 519 |

Incoming and header trusses must be connected together to act as a single unit

In Situ

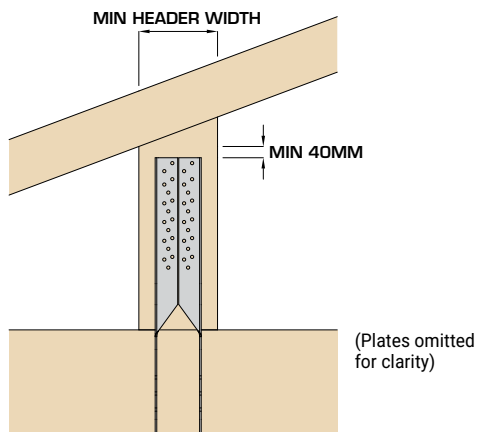

- Minimum edge distances must be met to achieve full capacity.
- Please ensure vertical end members are stepped back to allow room for screw heads.
- Supported member should be positioned to the back of the hanger.
- Maximum allowable gap of 3mm.


Load Data

| Product Code | Fixings | | Characteristic Capacity (kN) | |
|-----------------------------------|-----------------|----------|------------------------------|--------------------------------|
| | PSTS 6.5 x 65mm | | Uplift | Solid Timber Header (Min TR26) |
| | Header | Incoming | | |
| HGG-80, HGG-102, HGG-153, HGG-200 | 34 | 6 | 11.40* | 64.60 |

*Minimum 122mm deep bottom chord required to achieve the full uplift capacity

VHGG

Very Heavy Girder To Girder

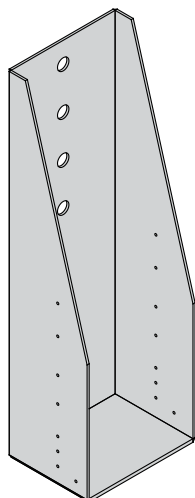


Available Sizes

| Product Code | Incoming Truss Width | Hanger Width (W) (mm) |
|--------------|-----------------------|-----------------------|
| VHGG-80 | 2No 35 ⁽²⁾ | 80 |
| VHGG-102 | 2No 47 ⁽²⁾ | 102 |
| VHGG-118 | 3No 35 ⁽³⁾ | 118 |
| VHGG-153 | 3No 47 ⁽³⁾ | 153 |
| VHGG-200 | 4No 47 ⁽⁴⁾ | 200 |

⁽²⁾/⁽³⁾/⁽⁴⁾Trusses must be connected together to act as a single unit

In Situ

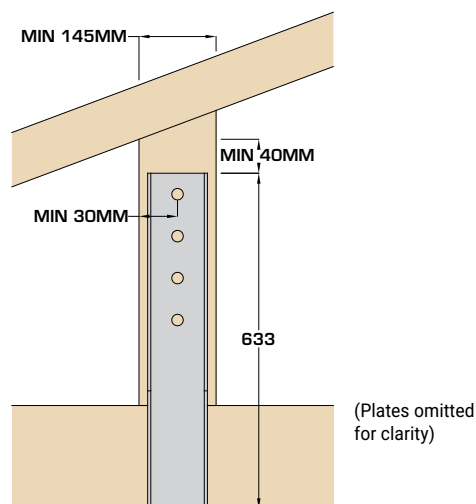

- Minimum edge distances must be met to achieve full capacity.
- Please ensure vertical end members are stepped back to allow room for bolt heads.
- Supported member should be positioned to the back of the hanger.
- Maximum allowable gap of 3mm.

Load Data

| Product Code | Fixings | | Characteristic Capacity (kN) | | | | |
|---|-----------|--------------------|------------------------------|--------------------------------|-----------------------|----------------------------|------------------------|
| | Header | Incoming | Uplift | Solid Timber Header (Min TR26) | | | |
| | Bolts M20 | Nails (3.4 x 35mm) | | 2 Ply 35mm (70mm min) | 2 Ply 47mm (94mm min) | 3 Ply 35/ 47mm (105mm min) | 4 Ply 47mm (188mm min) |
| VHGG-80, VHGG-102, VHGG-118, VHGG-153, VHGG-200 | 4 | 8 | 4.67 | 66.5 | 88.2 | 88.2 | 94.6 |

The VHGG hanger is designed to support multiple ply girder trusses from a vertical web in very high load situations.

Features & Benefits

- Fixings into vertical web only therefore no requirement for increased bottom chord depths
- Additional side fixings allows for greater uplift capacity

Material Specification

- Zinc undercoated

Fixings


4No M20 Bolts – 180mm long fully threaded (inc nut, round washer, form G washer) supplied with part**

| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |


*For use with Paslode PPNXi

**Please specify 240mm long bolts when connecting to 4 ply 47mm header members

Enhanced Uplift

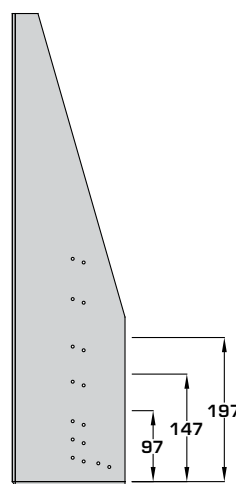


Dimensions (mm)

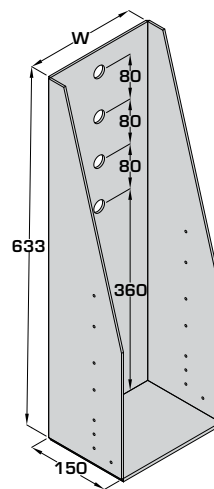

| Minimum Truss Bottom Chord Depth (mm) | Fixing (3.4 x 35mm) | Characteristic Capacity (kN) |
|---------------------------------------|---------------------|------------------------------|
| | Incoming | Uplift |
| 97 | 8 | 4.67 |
| 147 | 10 | 8.49 |
| 197 | 12 | 14.72 |
| Vertical | 12 | 14.72 |

KH

Kwiki Hanger Standard Leg

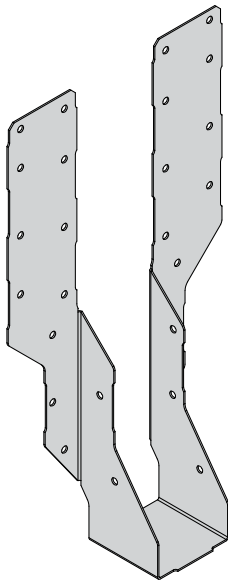

The KH hanger is designed for simple solid timber to timber connections.

Features & Benefits

- Adjustable leg length accommodates varying timber depths
- Light gauge steel eliminates the need for notching timber

Material Specification

Galvanised mild steel – Z275

Fixings


| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi


Available Sizes

| Product Code | Minimum Header Depth (mm) | Hanger Width (W) (mm) | Hanger Depth (H) (mm) | Stirrup Height (F) (mm) |
|--------------|---------------------------|-----------------------|-----------------------|-------------------------|
| KH-38 | 140 | 38 | 271 | 140 |
| KH-44 | 140 | 44 | 268 | 137 |
| KH-50 | 140 | 50 | 265 | 134 |
| KH-75 | 140 | 75 | 277 | 122 |
| KH-100 | 120 | 100 | 265 | 109 |

Dimensions (mm)

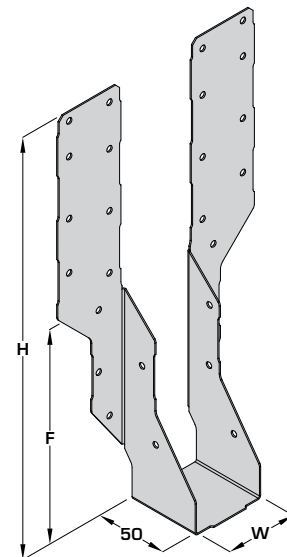

In Situ

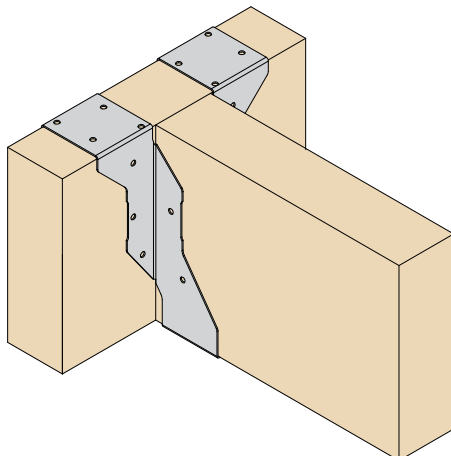

Product not suitable for use with I-Joists or Open Web Joists.

'F' dimension does not support 60% of the joist depth.

Load Data


| Product Code | Fixings (3.4 x 35mm) | | Characteristic Capacity (kN) | |
|---|----------------------|----------|------------------------------|------------------------------------|
| | Header | Incoming | Uplift** | Solid Timber Header (Min TR26/C27) |
| KH-38, KH-44, KH-47, KH-50, KH-63, KH-75, KH-92, KH-100, KH-125, KH-150 | 24 | 5 | 4.64 | 12.48 |

**Supported timber must be at least stirrup height to achieve full uplift capacity. For reduced fixing capacity please contact Cullen Technical.

KHL

Kwiki Hanger Long Leg

European Community
Registered Design

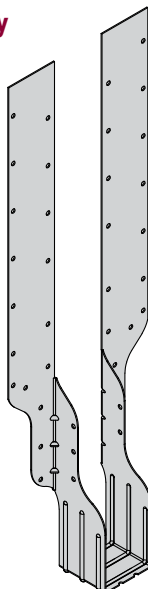

The KHL hanger is a long leg hanger designed for simple solid timber to timber connections.

Features & Benefits

- Adjustable leg length accommodates varying timber depths
- Solution for dropped/underslung applications

Material Specification

- Galvanised mild steel – Z275

Fixings


| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi

Available Sizes


| Product Code | Minimum Header Depth (mm) | Hanger Width (W) (mm) | Hanger Depth (H) (mm) | Stirrup Height (F) (mm) |
|--------------|---------------------------|-----------------------|-----------------------|-------------------------|
| KHL-39 | 190 | 38 | 481 | 182 |
| KHL-50 | 190 | 50 | 475 | 176 |
| KHL-75 | 170 | 75 | 462 | 163 |
| KHL-92 | 170 | 92 | 454 | 156 |
| KHL-100 | 170 | 100 | 450 | 151 |
| KHL-125 | 140 | 125 | 437 | 138 |
| KHL-150 | 140 | 150 | 425 | 126 |

Dimensions (mm)

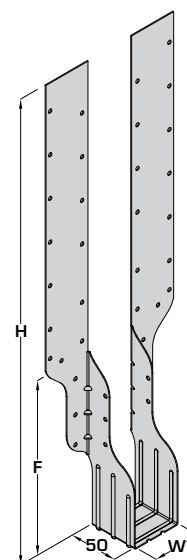


In Situ

Standard Installation

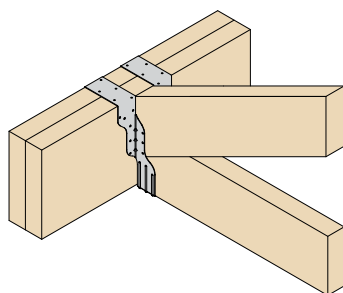

(plates omitted for clarity)

Dropped Installation

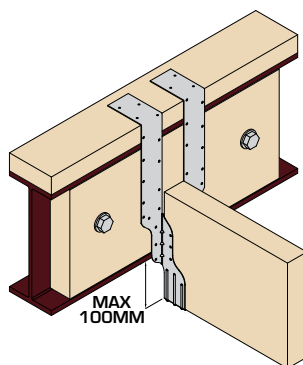

Product not suitable for use with I-Joists.

When supporting open web joists the side flanges (F) must support at least 60% of the joist depth.

Contact Technical Support for further information.


Load Data

| Product Code | Fixings (3.4 x 35mm) | | Characteristic Capacity (kN) | |
|---|----------------------|----------|------------------------------|------------------------------------|
| | Header | Incoming | Uplift** | Solid Timber Header (Min TR26/C27) |
| KHL-39, KHL-44, KHL-47, KHL-50, KHL-63, KHL-75, KHL-92, KHL-100 | 34 | 5 | 4.64 | 18.00 |
| KHL-125, KHL-150 | 34 | 5 | 4.64 | 15.04 |

**Supported timber must be at least stirrup height to achieve full uplift capacity. For reduced fixing capacity please contact Cullen Technical.

MH RANGE

Multi Hanger

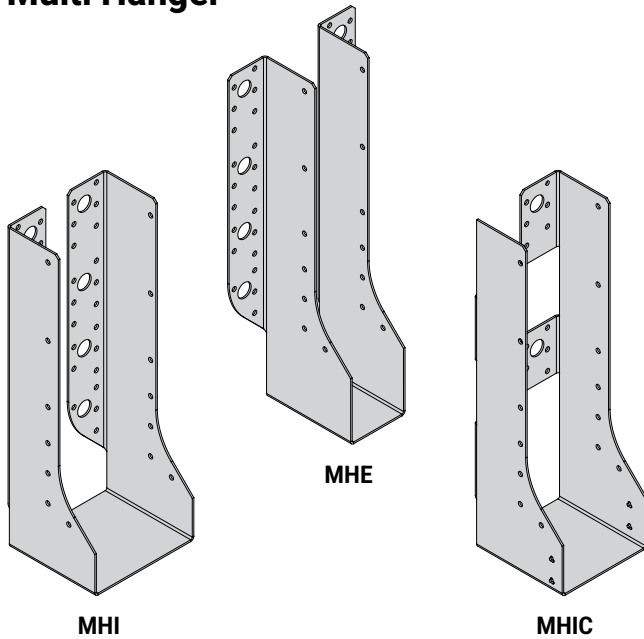

The MH hanger range is designed to support timber to timber connections in medium to high load situations.

Features & Benefits

- External and internal flange options allow for multifunctional use.
- Range of sizes and potential fixing options allows for greater design flexibility.
- Partial fixing options available on request. Contact Technical Support.

Material Specification

- Galvanised mild steel – Z275

Fixings

| Code | Description | Box Qty |
|-------------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |
| See page 10 | M12 Bolts | Each |

*For use with Paslode PPNxi

Available Sizes

| Hanger Width (W) (mm) | MHE280 | MHE380 | MHI/MHIC380 | MHE490 | MHI/MHIC490 | MHE620 | MHI/MHIC620 |
|-----------------------|---------------|----------------|----------------|----------------|----------------|----------------|----------------|
| 39 | MHE280-39-120 | MHE380-39-170 | MHIC380-39-170 | MHE490-39-225 | MHIC490-39-225 | – | MHIC620-39-290 |
| 50 | MHE280-50-115 | MHE380-50-165 | MHIC380-50-165 | MHE490-50-220 | MHIC490-50-220 | MHE620-50-285 | MHIC620-50-285 |
| 55 | – | – | – | – | MHIC490-55-217 | – | – |
| 61 | – | – | – | – | MHIC490-61-214 | – | MHIC620-61-279 |
| 65 | – | – | – | – | MHIC490-65-212 | – | – |
| 75 | MHE280-75-102 | MHE380-75-152 | MHIC380-75-152 | MHE490-75-207 | MHIC490-75-207 | MHE620-75-272 | MHIC620-75-272 |
| 78 | – | – | – | MHE490-78-206 | MHIC490-78-206 | MHE620-78-271 | – |
| 92 | – | MHE380-92-144 | MHI380-92-144 | MHE490-92-199 | MHI490-92-199 | MHE620-92-264 | MHI620-92-264 |
| 100 | MHE280-100-90 | MHE380-100-140 | MHI380-100-140 | MHE490-100-195 | MHI490-100-195 | MHE620-100-260 | MHI620-100-260 |
| 110 | – | – | – | MHE490-110-190 | – | – | – |
| 118 | – | – | – | MHE490-118-186 | – | – | – |
| 122 | – | – | – | MHE490-122-184 | – | MHE620-122-249 | – |
| 125 | – | – | – | MHE490-125-182 | MHI490-125-182 | MHE620-125-247 | MHI620-125-247 |
| 130 | – | – | – | – | – | MHE620-130-245 | – |
| 135 | – | – | – | MHE490-135-177 | MHI490-135-177 | – | – |
| 138 | – | – | – | MHE490-138-176 | MHI490-138-176 | MHE620-138-241 | MHI620-138-241 |
| 144 | – | – | – | – | MHI490-144-173 | MHE620-144-238 | – |
| 150 | – | MHE380-150-115 | MHI380-150-115 | MHE490-150-170 | MHI490-150-170 | MHE620-150-235 | MHI620-150-235 |

| Hanger Width (W) (mm) | MHE620 | MHI620 | MHE670 | MHE720 |
|-----------------------|----------------|----------------|----------------|----------------|
| 183 | MHE620-183-218 | MHI620-183-218 | – | – |
| 198 | MHE620-198-211 | MHI620-198-211 | – | – |
| 210 | – | – | MHE670-210-230 | – |
| 225 | – | – | MHE670-225-222 | – |
| 230 | – | – | MHE670-230-220 | – |
| 250 | – | – | MHE670-250-210 | – |
| 300 | – | – | – | MHE720-300-210 |

Example: **MHIC620-50-285**

L W H

L = length W = width H = height






The hanger depth must be at least 60% of the carried member depth to prevent rotation in a floor or flat/non braced roof structure

MH RANGE

Multi Hanger



Hanger Coding

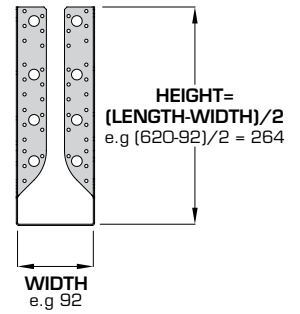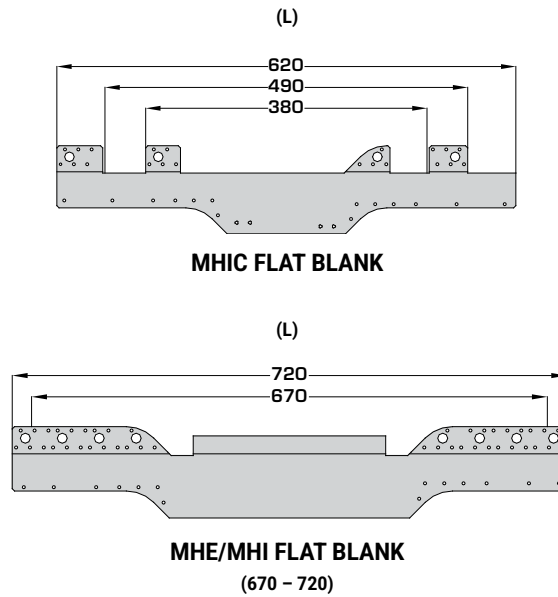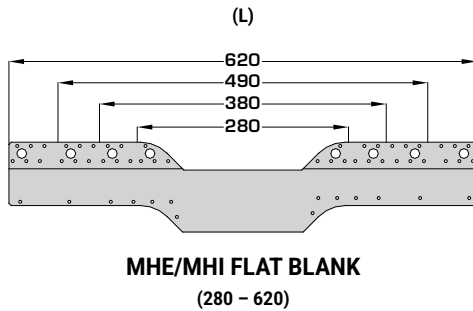



Example: **MHI620-92-264**

L = length W = width H = height

Dimensions (mm)

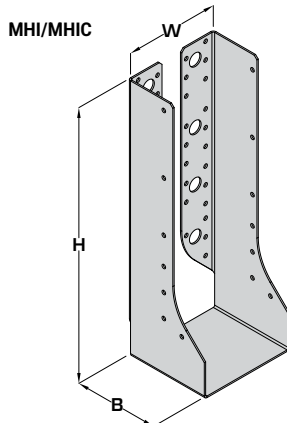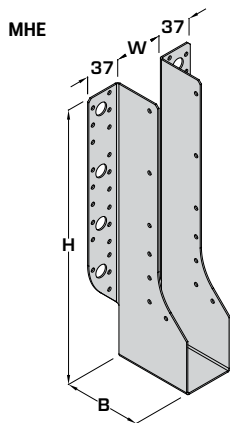

In Situ

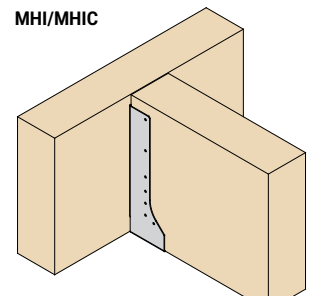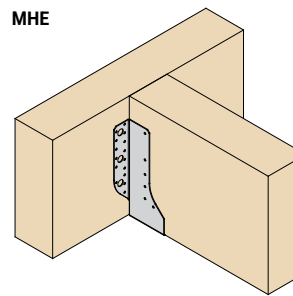

(Incoming member must be notched to accommodate bolts heads when bolting)

Load Data

| Product Code | Dimensions (mm) | | | Fixings | | | Characteristic Capacity (kN) | |
|--------------|-----------------|-----|----|--------------------|-------------|----------|------------------------------|--------------------------------------|
| | W | | B | Header | | Incoming | Uplift | Solid Timber Header (Min TR26 / C27) |
| | Min | Max | | Nails (3.4 x 35mm) | Bolts (M12) | | | |
| MHE/MHI280 | 39 | 100 | 85 | 8 | 0 | 6 | 4.67 | 10.12 |
| | | | | 0 | 2 | 6 | | 10.33* |
| MHE/MHI380 | 39 | 150 | 85 | 18 | 0 | 10 | 8.49 | 20.07 |
| | | | | 0 | 4 | 10 | | 17.13* |
| MHE/MHI490 | 39 | 100 | 85 | 30 | 0 | 12 | 14.72 | 25.66 |
| | | | | 0 | 6 | 12 | | 33.21** |
| MHE/MHI490 | 110 | 150 | 85 | 30 | 0 | 12 | 14.72 | 25.66 |
| | | | | 0 | 6 | 12 | | 27.65** |
| MHE/MHI620 | 39 | 100 | 85 | 42 | 0 | 14 | 14.72 | 32.77 |
| | | | | 0 | 8 | 14 | | 35.12** |
| MHE/MHI620 | 122 | 150 | 85 | 42 | 0 | 14 | 14.72 | 25.92 |
| | | | | 0 | 8 | 14 | | 35.12** |
| MHE/MHI620 | 183 | 198 | 85 | 42 | 0 | 14 | 14.72 | 32.77 |
| | | | | 0 | 8 | 14 | | 35.12** |
| MHE/MHI670 | 210 | 250 | 85 | 42 | 0 | 14 | 14.72 | 32.77 |
| | | | | 0 | 8 | 14 | | 35.12** |
| MHE/MHI720 | 300 | 300 | 85 | 42 | 0 | 14 | 14.72 | 32.77 |
| | | | | 0 | 8 | 14 | | 35.12** |
| MHIC380 | 39 | 78 | 82 | 9 | 0 | 10 | 8.49 | 10.55 |
| MHIC490 | 39 | 78 | 82 | 16 | 0 | 12 | 14.72 | 16.76 |
| MHIC620 | 39 | 78 | 82 | 21 | 0 | 14 | 14.72 | 21.26 |


*For bolt values header to be minimum width of 70mm TR26.

**For bolt values header to be minimum width of 94mm TR26, for header widths less than these, please calculate bolt values using EC5 and use the lower of the calculated or published above.

Note: MHE/MHI bolt values can be applied to bolting to masonry but the masonry fixings must be specified by the Building Designer and will be limited dependent on the type, strength and location into the masonry.

FTHI

Flexible Timber Hanger

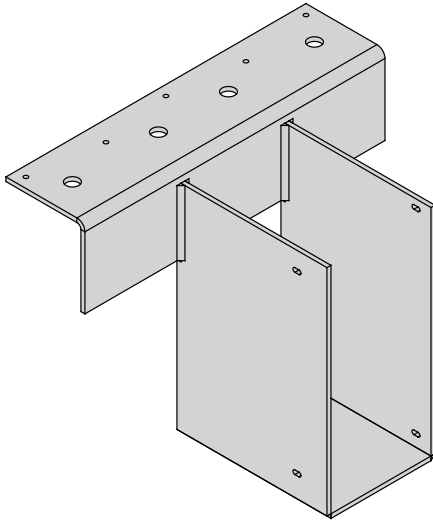

The FTHI hanger is designed to support joists, trussed rafters and solid timber members in a top fix only application for high load situations.

Features & Benefits

- Increased top flange to allow for greater load distribution
- Options available for skewed, offset, dropped and straddle connections

Material Specification

- 4mm mild steel with zinc phosphate undercoat with an organic bituminous top coat to BS EN845-1:2013+A1:2016

Fixings

| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi

Available Sizes


Hanger Widths (mm):

39, 46, 50, 61, 65, 72, 75, 78, 92, 100, 122, 125, 130, 138, 144, 150, 183, 198, 222, 225, 250, 300

Hanger Depths (mm):


140, 165, 195, 200, 210, 220, 225, 230, 235, 241, 245, 253, 280, 302, 350, 356, 380, 393, 400, 418, 450

FTHI

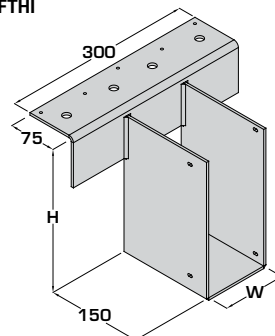

FTHI-W-H
Example:
FTHI-100-245


FTHIS – SKEW

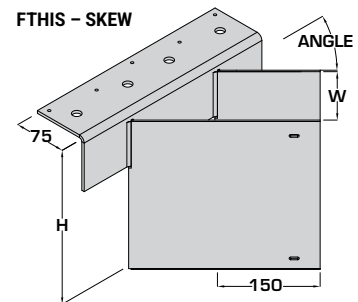

FTHIS-W-H-OFFSET DIRECTIONAL-ANGLE
Example: FTHIS-100-245-L-45

(skews from 30-87.5° in 2.5° increments, with 5mm automatically added to ordered width to allow for tolerance)

FTHIO – OFFSET

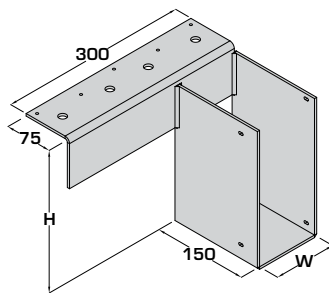


Left hand version shown

FTHIO-W-H-OFFSET DIRECTION


Example:
FTHIO-100-245-L
FTHIO-100-245-R

FTHID – DROPPED

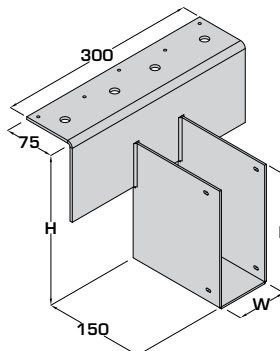

FTHID-W-H-F
Example:
FTHID-100-245-220

FTHIST – STRADDLE

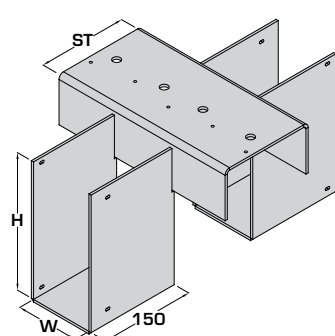

FTHIST-W-H-ST
Example:
FTHIST-100-245-140

(straddle widths will be fabricated with a tolerance +2mm)


Load Data

| Product Code | Fixings (3.4 x 35mm) | | Characteristic Capacity (kN) | |
|--------------|----------------------|----------|------------------------------|----------------------|
| | Header | Incoming | Uplift | LVL or GL (Min GL28) |
| FTHI | 5 | 2 | 2.00 | 42.00 |

– 12mm diameter holes not required for this application

LAB

Angle Bracket

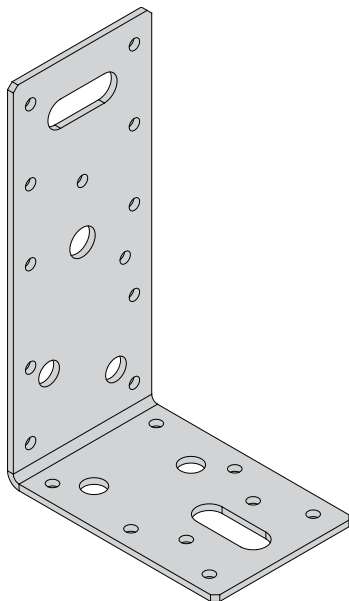

The LAB is a 90° angle bracket to accommodate various timber to timber connections.

Features & Benefits

- Multiple holes to accommodate nail, screw and bolt fixings

Material Specification

- Galvanised mild steel – Z275

Fixings

| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |


*For use with Paslode PPNXi

3.35 x 50mm sheradised ringshank nails – supplied by others


3.5 x 30mm wood screws – supplied by others

In Situ


Horizontal:

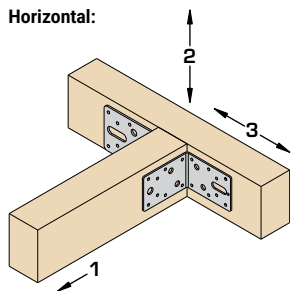

Vertical:

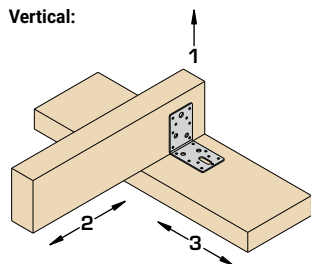

Dimensions (mm)

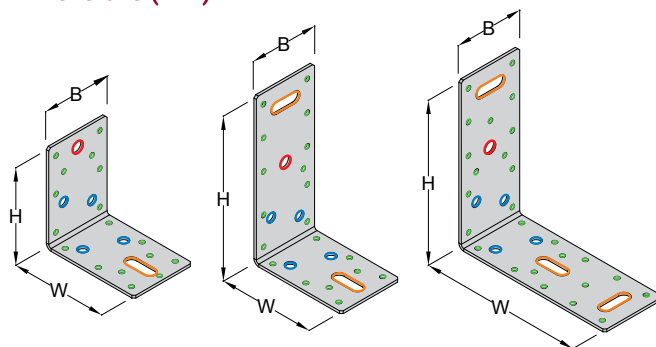

LAB-180

LAB-240

LAB-300




Load Data (all loads are per pair of angle brackets)

| Product Code | Dimensions (mm) | | | Fixings (3.4 x 35mm Square Twist Nails) | | Load Direction | Characteristic Capacity (kN) |
|--------------|-----------------|-----|----|---|----------|----------------|-------------------------------|
| | W | H | B | Header | Incoming | | Solid Timber Header (Min C24) |
| LAB-180 | 90 | 90 | 60 | 12 | 16 | 1 | 3.32 |
| | | | | | | 2 | 9.62 |
| | | | | | | 3 | 10.12 |
| LAB-240 | 150 | 90 | 60 | 22 | 16 | 1 | 4.16 |
| | | | | | | 2 | 12.39 |
| | | | | | | 3 | 10.12 |
| LAB-300 | 150 | 150 | 60 | 22 | 26 | 1 | 4.16 |
| | | | | | | 2 | 12.39 |
| | | | | | | 3 | 13.50 |
| | | | | Fixings (3.35 x 50mm Ring Shank) | | | |
| | | | | Header | Incoming | | |
| LAB-180 | 90 | 90 | 60 | 12 | 16 | 1 | 7.27 |
| LAB-240 | 150 | 90 | 60 | 22 | 16 | 1 | 7.97 |
| LAB-300 | 150 | 150 | 60 | 22 | 26 | 1 | 7.97 |
| | | | | Fixings (3.35 x 30mm Wood Screw) | | | |
| | | | | Header | Incoming | | |
| LAB-180 | 90 | 90 | 60 | 12 | 16 | 1 | 6.40 |
| LAB-240 | 150 | 90 | 60 | 22 | 16 | 1 | 6.40 |
| LAB-300 | 150 | 150 | 60 | 22 | 26 | 1 | 6.40 |

SA-45

Skewed Angle 45° Hanger

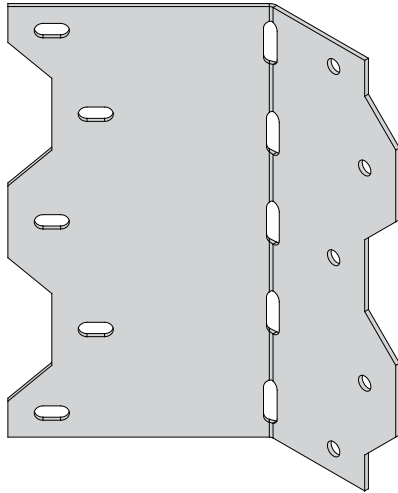

The SA-45 is a 45 degree pre-bent angle bracket for light load timber to timber connections.

Features & Benefits

- Adjustable between 45 – 90 degrees for angles 45 – 135 degrees (to be bent once)

Material Specification

- Galvanised mild steel – Z275

Fixings


| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi


3.75 x 75mm round wire nails – for enhanced installation

In Situ


Standard 45°

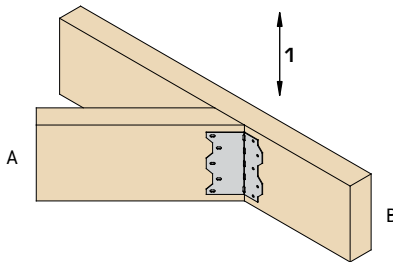


Standard 90°

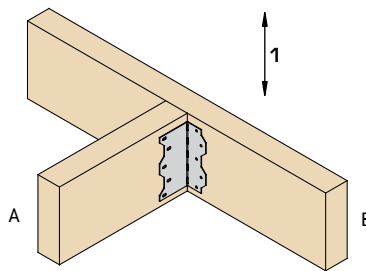

Dimensions (mm)

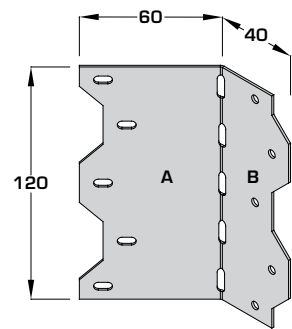


Enhanced 45°

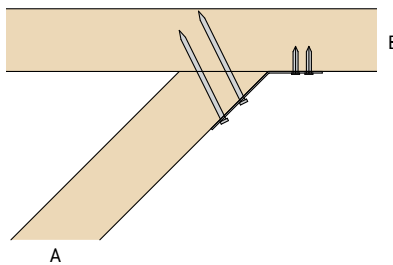


Joist A – 3.75 x 75mm round wire nails
Joist B – 3.4 x 35mm square twist nails



Incorrect Installation

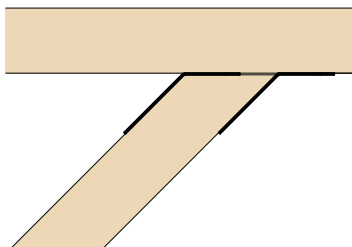

Do not use more than one bracket per connection.

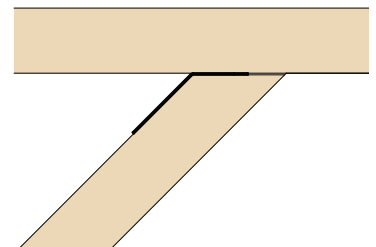

Do not install bracket on the acute side of the angle.


Load Data

| | Angle | Load Direction | Fixings | | Characteristic Capacity (kN) |
|------------------|-------|----------------|-----------------|----------------|--------------------------------|
| | | | Joist (A) | Joist (B) | Solid Timber Header (Min TR26) |
| STANDARD INSTALL | 45° | 1 | 5No 3.4 x 35mm | 5No 3.4 x 35mm | 4.02 |
| | 90° | 1 | 5No 3.4 x 35mm | 5No 3.4 x 35mm | 3.49 |
| ENHANCED INSTALL | 45° | 1 | 5No 3.75 x 75mm | 5No 3.4 x 35mm | 5.84 |

Contact Technical Support for angles outwith 45° and 90°


45L/R

Face Fix 45° Hanger

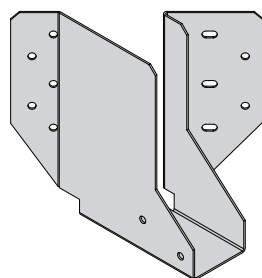

85 – 135mm Deep

Left hand version shown

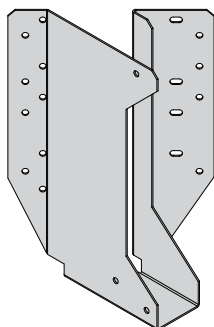

220 – 300mm Deep

The 45L/R is a pre-skewed 45 degree hanger for timber to timber connections.

Features & Benefits

- Economical solution provides set angle for ease of installation

Material Specification

- Galvanised mild steel – Z275

Fixings

| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |


*For use with Paslode PPNXi

Available Sizes


| Hanger Width (W) (mm) | Hanger Depth (H) (mm) | | | | | | | |
|-----------------------|-----------------------|------------|-------------|-------------|-------------|-------------|-------------|-------------|
| | 85 | | 135 | | 220 | | 300 | |
| | Left | Right | Left | Right | Left | Right | Left | Right |
| 39 | 45-L-39-85 | 45-R-39-85 | 45-L-39-135 | 45-R-39-135 | 45-L-39-220 | 45-R-39-220 | 45-L-39-300 | 45-R-39-300 |
| 50 | – | – | – | – | 45-L-50-220 | 45-R-50-220 | 45-L-50-300 | 45-R-50-300 |
| 75 | – | – | – | – | 45-L-75-220 | 45-R-75-220 | 45-L-75-300 | 45-R-75-300 |
| 92 | – | – | – | – | 45-L-92-220 | 45-R-92-220 | – | – |

See VS (pages 116 – 117) or VRC (pages 83 – 84) for skews outwith 45°


Left Hand:

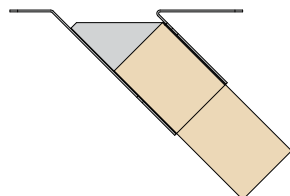

Right Hand:

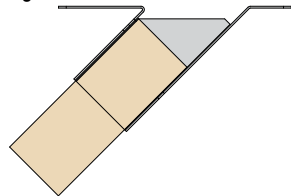


In Situ


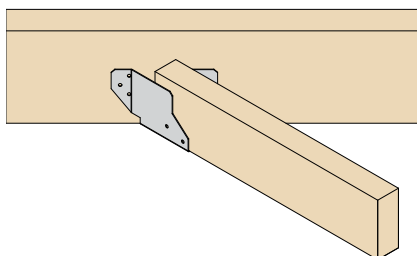


Dimensions (mm)

85-135mm Deep

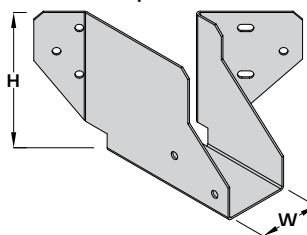

220-300mm Deep

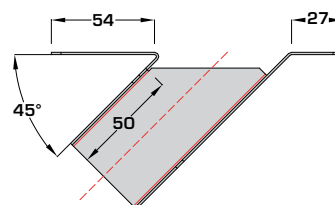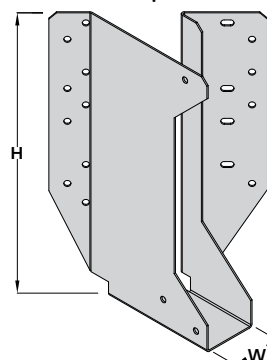


Load Data

| Hanger Depth (H) (mm) (Depth Dependant Only) | Fixings (3.4 x 35mm) | | Characteristic Capacity (kN) | |
|---|----------------------|----------|------------------------------|-------------------------------|
| | Header | Incoming | Uplift | Solid Timber Header (Min C20) |
| 85 | 6 | 2 | 0.99 | 5.71 |
| 135 | 10 | 2 | 0.99 | 9.36 |
| 220 | 17 | 3 | 0.99 | 14.73 |
| 300 | 21 | 3 | 0.99 | 17.54 |

VS

Variable Skewed Timber Hanger

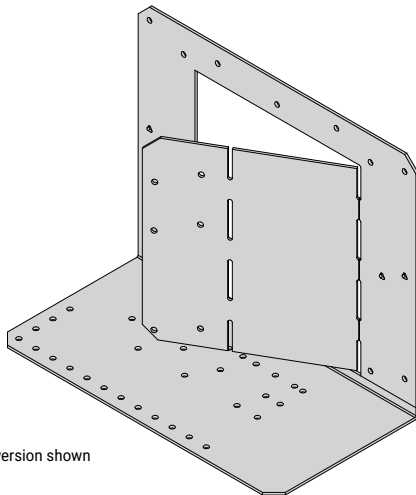
UK
CA


Right hand version shown

The VS hanger is used to support joists and trusses up to 97mm wide from solid timber members in skewed applications between 30–90°.

Features & Benefits

- Unique hanger design provides a variable skew angle between 30–90°
- No need to mitre cut joists
- Angle scale on base to ease adjustment

Material Specification

- Galvanised mild steel – Z275

Fixings


| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi


Available Sizes

| Min Joist Width (mm) | Max Joist Width (mm) | Handing | Hanger Depth (mm) | | |
|----------------------|----------------------|---------|-----------------------|----------|----------|
| | | | 135 | 195 | 220 |
| 38 | 97 | Right | VS-135-R | VS-195-R | VS-220-R |
| 38 | 97 | Left | VS-135-L | VS-195-L | VS-220-L |
| >97 | | | See FTHIS on page 116 | | |


Left Hand

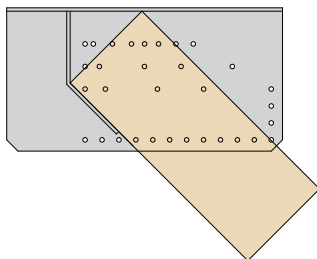


Right Hand

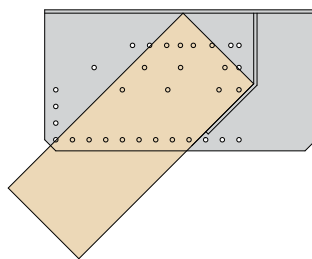


Dimensions (mm)

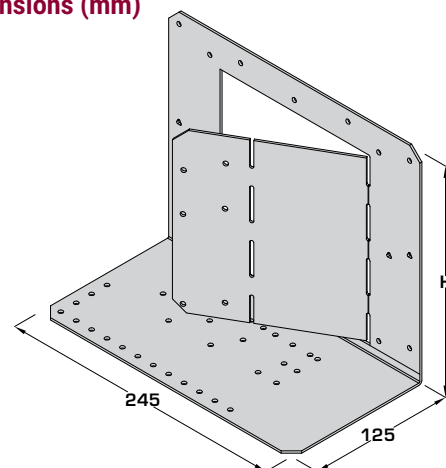

In Situ

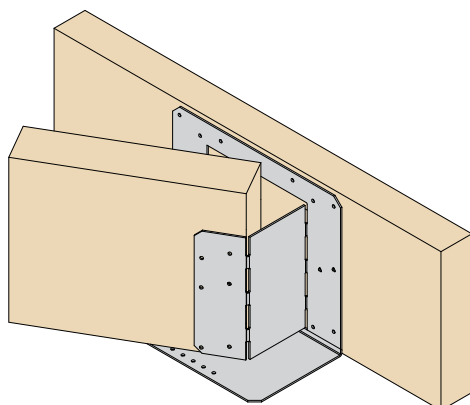

Solid timber joists must be full depth of hanger

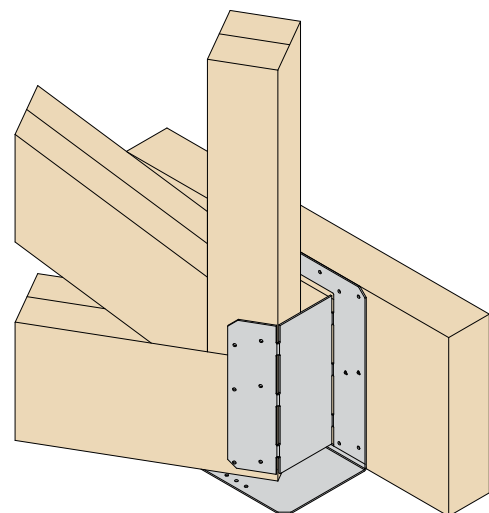

Bottom chord must be deeper than hanger or vertical required for trusses

VS

Variable Skewed Timber Hanger

Load Data


| Hanger Depth (mm) | Fixings (3.4 x 35mm) | Characteristic Capacity (kN) | |
|------------------------|----------------------|------------------------------|--------------------------------|
| | | | |
| (Depth Dependant Only) | Header | Incoming | |
| 135 | 11 | 4 | Uplift |
| 195, 220 | 11 | 6 | Solid Timber Header (Min TR26) |
| | | | 2.50 |
| | | | 3.75 |
| | | | 4.30 |
| | | | 5.51 |

Installation Instructions


Stage 1

Adjust side plate to approximate angle between 30° and 90° using scale on base of hanger, bending only once. Please refer to the angle table below to determine if one or two bends are required.

Single Bend

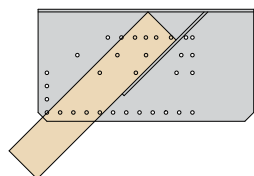


Double Bend

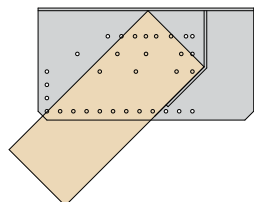

| Joist Width (mm) | Double Bend | Single Bend |
|------------------|-------------|-------------|
| 35 | 30-90° | n/a |
| 38 | 30-90° | n/a |
| 44 | 30-90° | n/a |
| 45 | 30-90° | n/a |
| 47 | 30-90° | n/a |
| 51 | >32-90° | 30-32° |
| 53 | >32-90° | 30-32° |
| 58 | >34-90° | 30-34° |
| 59 | >34-90° | 30-34° |
| 60 | >35-90° | 30-34° |
| 63 | >37-90° | 30-37° |
| 70 | >39-90° | 30-39° |
| 72 | >40-90° | 30-40° |
| 76 | >42-90° | 30-42° |
| 88 | >46-90° | 30-46° |
| 89 | >46-90° | 30-46° |
| 90 | >46-90° | 30-46° |
| 94 | >48-90° | 30-48° |
| 97 | >49-90° | 30-49° |

Stage 3


Locate incoming member and adjust side plate to correct angle, ensuring maximum gap between incoming joist/truss and back plate is no greater than 3mm.

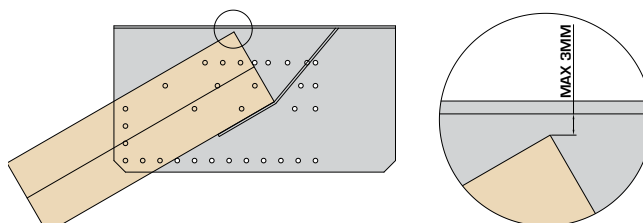

Max – 3mm gap at any given time


Stage 4

Fix to incoming member using 6No 3.4 x 35mm square twist nails (4No for VS-135).

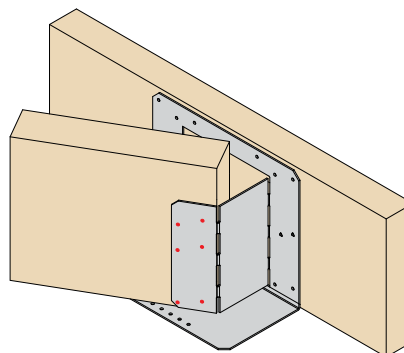


Stage 2

Position hanger against face of joist/truss and nail using 11No 3.4 x 35mm square twist nails.

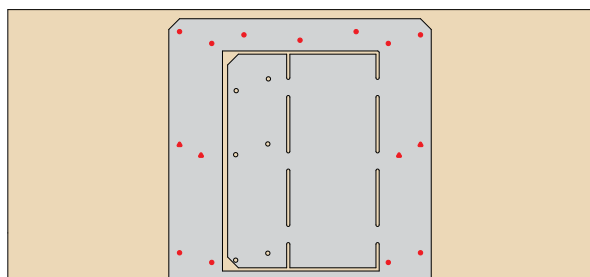


Please ensure that 1No inner nail hole (indicated in red) and 1No outer nail hole (indicated in red) are filled on the underside with 3.4 x 35mm square twist nails.

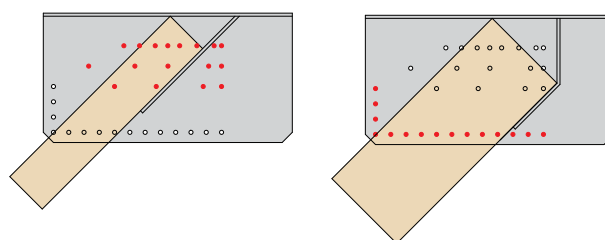

NP

Nail Plate

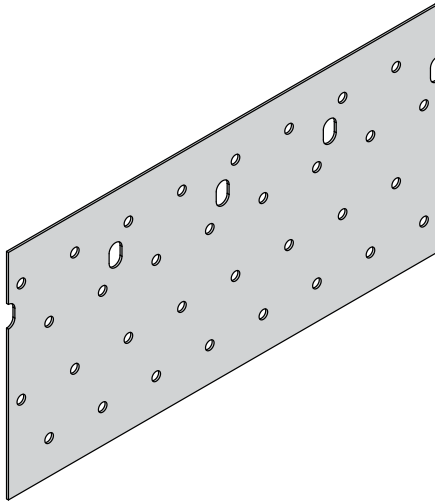

The NP nail plate allows the connection of two or more timber members.

Features & Benefits

- Part can be hand nailed on site for truss remedials

Material Specification

- Galvanised mild steel – Z275 – 0.9mm thick

Fixings


| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi

Available Sizes


| Nail Plate Length (L) (mm) | Nail Plate Width (W) (mm) | | | |
|----------------------------|---------------------------|------------|------------|------------|
| | 80 | 100 | 150 | 200 |
| 100 | – | – | NP-150-100 | – |
| 200 | – | NP-100-200 | – | – |
| 300 | NP-80-300 | NP-100-300 | – | NP-200-300 |

Dimensions (mm)

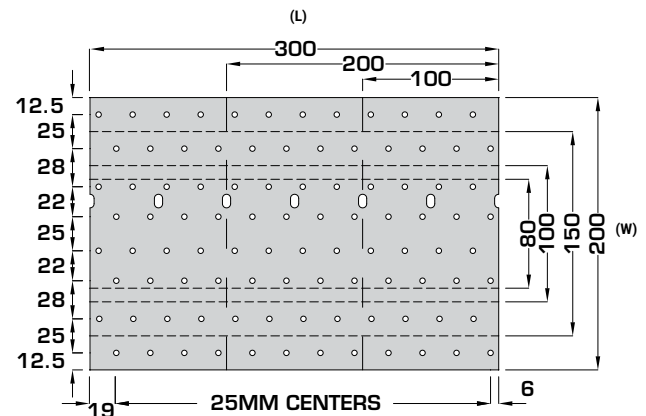


In Situ

- Timber to timber joints for use in trussed rafter roofs must be designed in accordance with EN1995-1-1:2004+A2:2014
- Nails must meet edge distance requirements to have load carrying capacity
- A nail plate should be positioned on each side of the joint. Care should be taken to ensure there are equal nails fixed from each side and no nail clashes

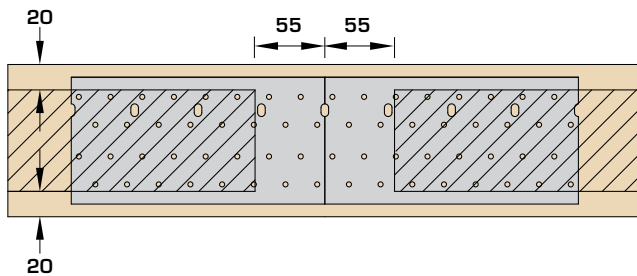


BUTT JOINTS

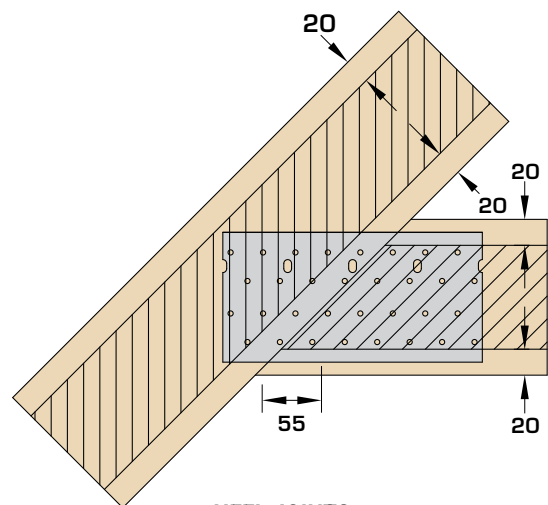

HEEL JOINTS

SB

Support Bracket

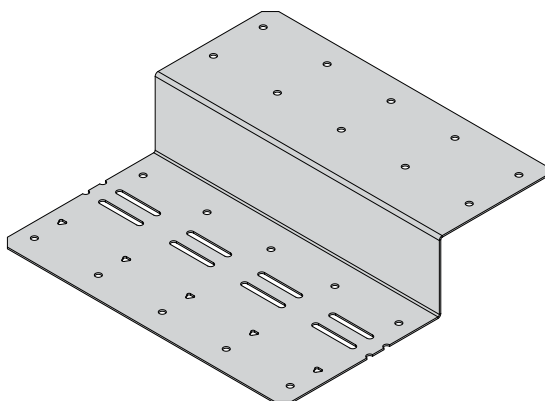

The SB support bracket is used to form a connection between timber bracing shelves and the adjacent trussed rafters.

Features & Benefits

- Unique design allows one part to accommodate any rafter width
- Can be connected to timber shelf at ground floor level to ease with installation

Material Specification

- Galvanised mild steel – Z275

Fixings


| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi

Available Sizes

| Product Code | Min Truss Width (mm) | Max Truss Width (mm) |
|--------------|----------------------|----------------------|
| SB | 35 | 188 |


Dimensions (mm)

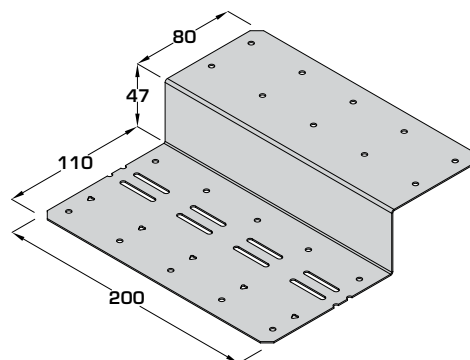

Installation Instructions


- PD 6693-1:2019 states that standard bracing details, suitable for fulfilling the functions of both roof and wall stability for spans up to 17m should conform to Annex E.
- PD 6693-1:2019 Annex E states that a 1mm thick steel bracket should be fixed to both rafter and timber shelf using 10No fixings to conform with detail C3.

Stage 1

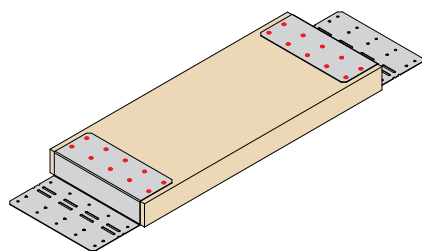

Nail support bracket to timber bracing shelf (min C16 grade) with 10No fixings per bracket (3.4 x 35mm square twist nails).


Stage 2

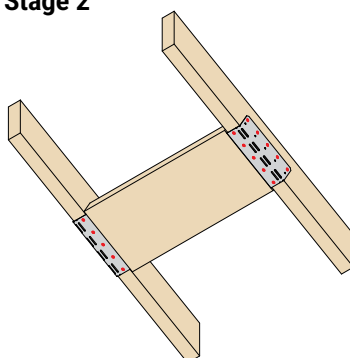

Single Rafter

Position timber bracing shelf in-between rafters and nail to underside with 5No fixings per bracket (3.4 x 35mm square twist nails).


Wipe the support bracket round the rafter and nail into the side of the rafter with 5No fixings per bracket (3.4 x 35mm square twist nails).

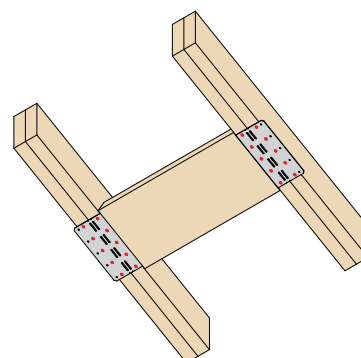


Multiple Rafters

Position timber bracing shelf in-between rafters and nail to underside with 10No fixings per bracket (3.4 x 35mm square twist nails).

Wallplate Connection Overview

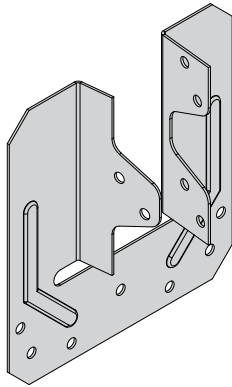


TC
Page 123

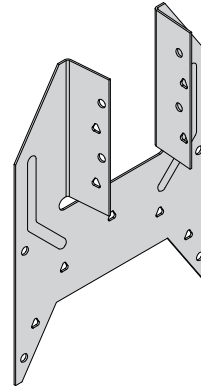


TA
Page 124 – 125

SINGLE 35 & 47MM WIDE TRUSSES

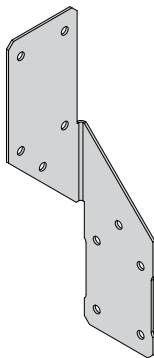


TA-1
Page 126

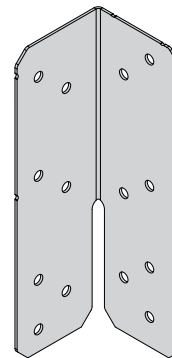

FAS
Page 127

NON WIDTH DEPENDANT

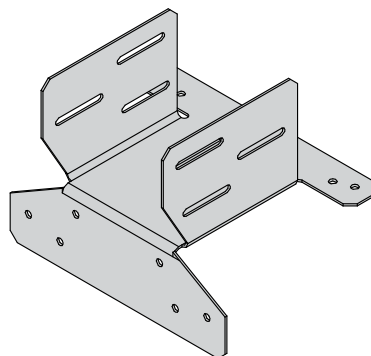


SS
Page 128

RAISED TIE / SCISSOR TRUSSES

TC

Truss Clip

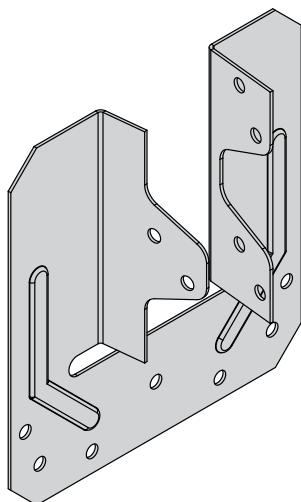

The TC is our standard truss clip for securing trussed rafters to single wall plates.

Features & Benefits

- Eliminates damage from skew nailing into the wall plate

Material Specification

- Galvanised mild steel – Z275

Fixings


| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi

Available Sizes


| Product Code | Truss Width (mm) |
|--------------|------------------|
| TC-38 | 35 |
| TC-50 | 44-47 |

Dimensions (mm)

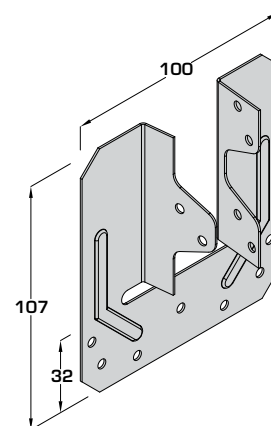


In Situ


1 No truss clip***

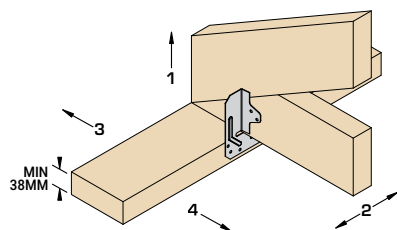

2 No truss clips***

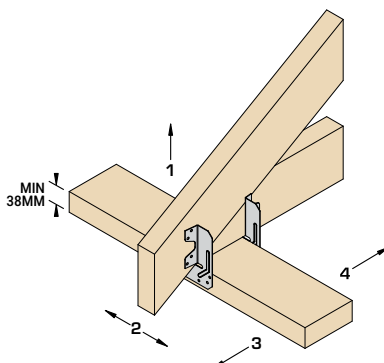

Incorrect Installation

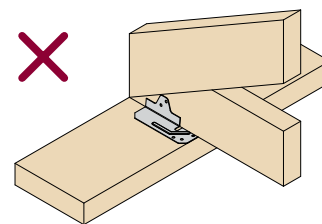

Do not install truss clips horizontally onto the wall plate.

***Also suitable to fix to the outside of the wall plate depending on truss heel detail.

(Plates omitted for clarity)


Load Data

| Product Code | Fixings (3.4 x 35mm) | | Load Direction | Characteristic Capacity (kN) |
|--------------|----------------------|----------|----------------|-------------------------------|
| | Header | Incoming | | Solid Timber Header (Min C16) |
| TC-38/TC-50 | 6 | 6 | 1 | 5.13 (10.26**) |
| | | | 2 | 2.00 (4.00**) |
| | | | 3 | 0.70 (2.37**) |
| | | | 4 | 1.67 (2.37**) |

**Values for 2No truss clips.

TA

Truss Anchor

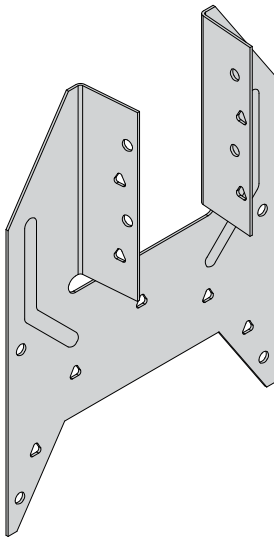

The TA secures trussed rafters to 2 ply wall plates or head binders whilst providing a positive fixing on two planes.

Features & Benefits

- Eliminates damage from skew nailing into the wall plate
- “Push on” fit allows truss anchor to be retained in position prior to nailing
- Optional triangular nail holes for enhanced performance

Material Specification

- Galvanised mild steel – Z275

Fixings

| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi

Available Sizes


| Product Code | Truss Width (mm) | W (mm) |
|--------------|------------------|--------|
| TA-38 | 35 | 113 |
| TA-50 | 47 | 113 |

In Situ

Double wall plate required for all installations (min 75mm) unless using in a timber frame application where the framing anchor can be fitted to the head binder.

Standard Installation


(Fill all circular nail holes)

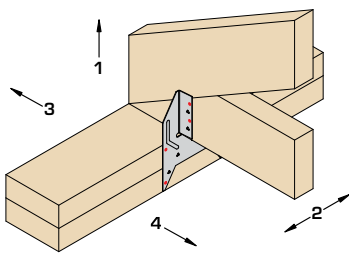

(Plates omitted for clarity)


Enhanced Installation

(Fill all nail holes)

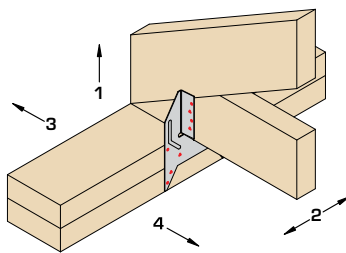


2No Truss Anchors

(Dependant on truss heel)

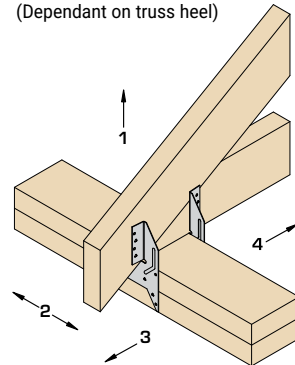

Dimensions (mm)

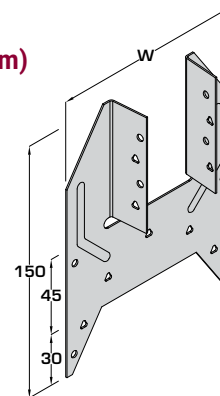


Load Data

| Product Code | Installation | Fixings (3.4 x 35mm) | | Load Direction | Characteristic Capacity (kN) |
|--------------|------------------|----------------------|----------|----------------|-------------------------------|
| | | Header | Incoming | | Solid Timber Header (Min C16) |
| TA-38, TA-50 | STANDARD INSTALL | 4 | 4 | 1 | 3.48 (6.96**) |
| | | | | 2 | 3.39 (6.78**) |
| | | | | 3 | 0.78 (1.35**) |
| | | | | 4 | 0.57 (1.35**) |
| TA-38, TA-50 | ENHANCED INSTALL | 9 | 8 | 1 | 7.54 (15.08**) |
| | | | | 2 | 4.17 (8.34**) |
| | | | | 3 | 2.10 (4.29**) |
| | | | | 4 | 2.19 (4.29**) |

**Values for 2No truss anchors


TA

Truss Anchor (Valley Truss) In Situ

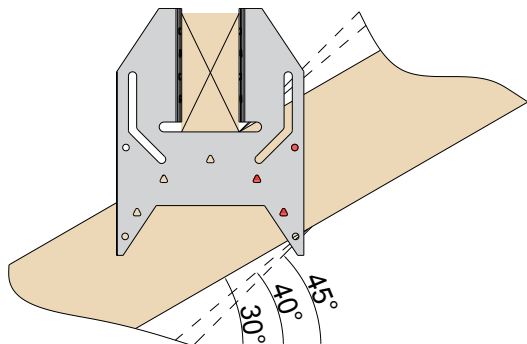

Installation Instructions

The TA can be used in conditions where the supporting truss is a maximum 45° slope. Fill the 3 nail holes highlighted above to the supporting truss (dependant on TA orientation) and fill 4no. nail holes (2no. each face) for the incoming truss for correct installation.

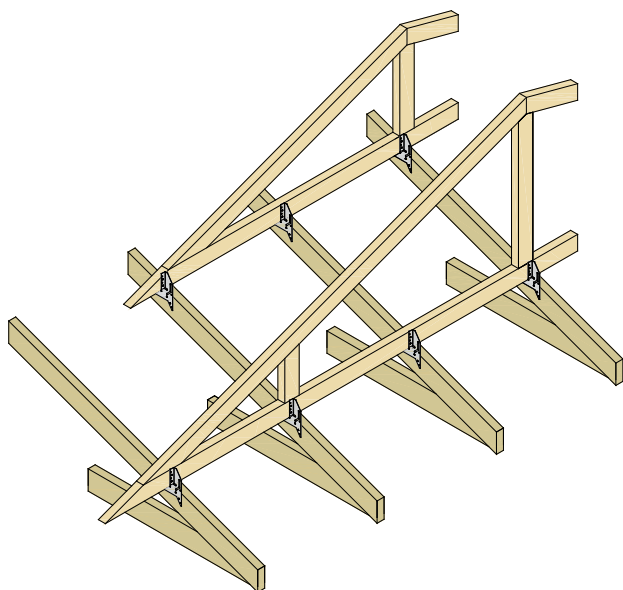

The TA can be used in valley truss applications, to connect a valley truss to the supporting truss below.

Features and Benefits

- 'Push-on' fit allows truss anchor to be retained in position prior to nailing
- Eliminates the need for a pre-cut angle barer to support the valley truss or pre-cut angle to valley truss
- Meets NHBC technical requirements


Material specification

- Galvanised Mild-Steel-Z275

Fixings

| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi

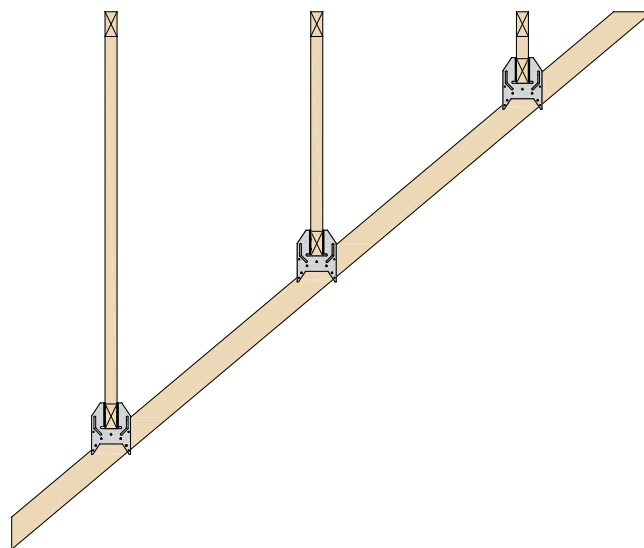


TA is to be installed on every occurring truss per valley truss.

Load Data

| Product Code | Installation | Fixings (3.4 x 35mm) | | Characteristic Value (kN) |
|--------------|--------------|----------------------|----------|------------------------------------|
| | | Header | Incoming | Solid Timber Header (Min C16) |
| TA-38, TA-50 | Valley Truss | 3 | 4 | 2.96 (per clip) downwards & uplift |

TA-1

Framing Anchor

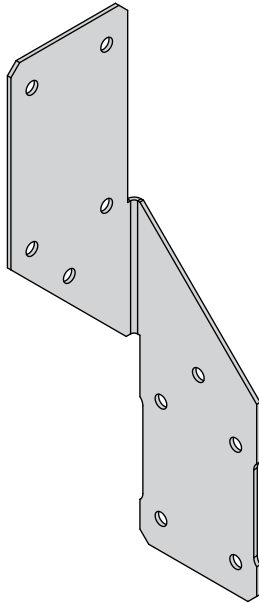

The TA-1 provides a positive connection on two planes without encroaching into the internal space.

Features & Benefits

- Eliminates damage from skew nailing
- Single anchor means the part is not width dependant

Material Specification


- Galvanised mild steel – Z275

Fixings

| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi


Dimensions (mm)

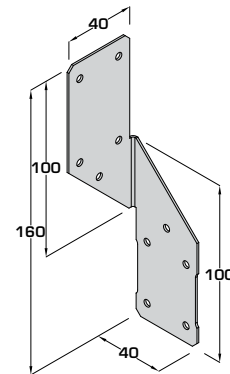


In Situ

Double wall plate required for all installations (min 75mm) unless using in a timber frame application where the framing anchor can be fitted to the head binder.


1No TA-1 standard installation**

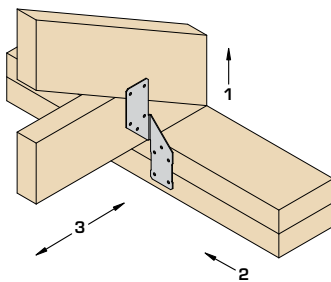

1No TA-1 installed to opposite side**

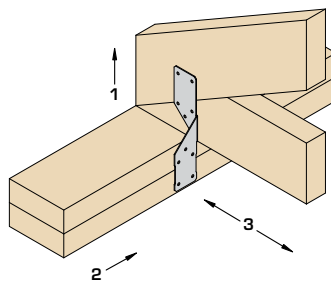

1No TA-1 installed to outer face**

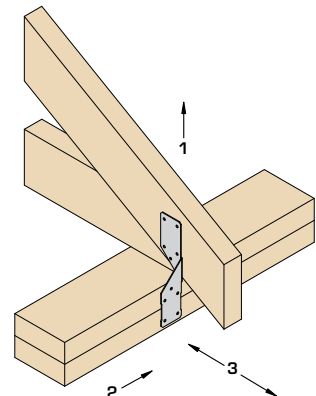

**Also suitable to fix to the outside of the wall plate depending on truss heel detail.

(Plates omitted for clarity)


Load Data

| Product Code | Fixings (3.4 x 35mm) | | Load Direction | Characteristic Capacity (kN) |
|--------------|----------------------|----------|----------------|-------------------------------|
| | Header | Incoming | | Solid Timber Header (Min C20) |
| TA-1 | 5 | 5 | 1 | 3.12 |
| | | | 2 | 1.55 |
| | | | 3 | 1.84 |

All values are per anchor.

FAS

Framing Anchor

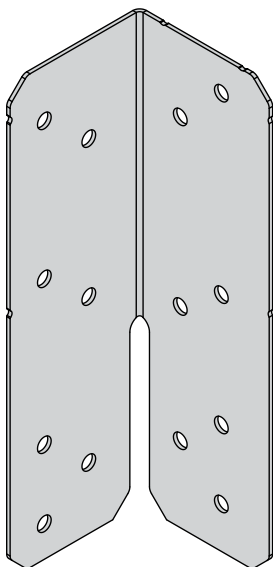

The FAS is an adjustable connector for providing a positive fixing on two planes.

Features & Benefits

- Eliminates damage from skew nailing
- Adjustable bend to accommodate various applications

Material Specification


- Galvanised mild steel – Z275

Fixings







| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi

Dimensions (mm)

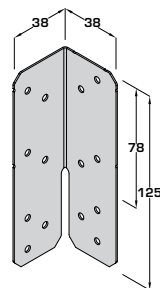

In Situ

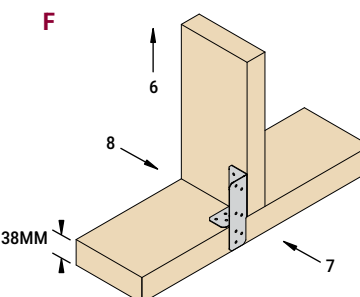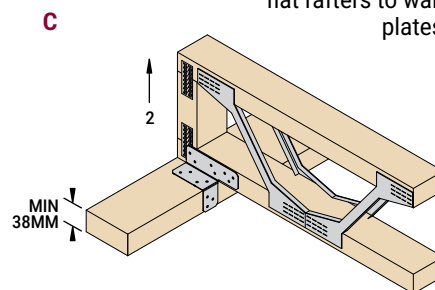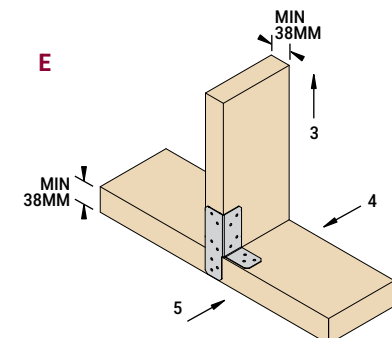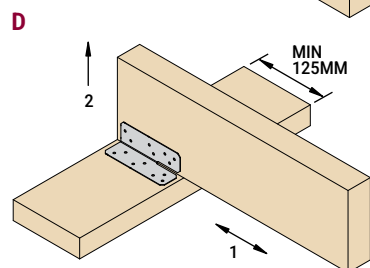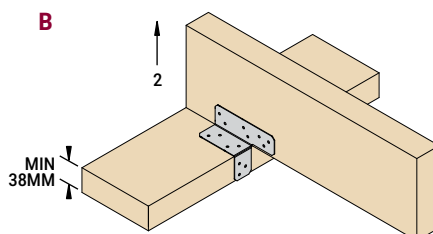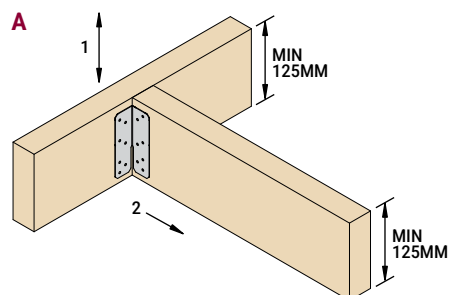


Suitable for fixing
Open Web / I-Joist
flat rafters to wall
plates

Load Data

| Product Code | Fixings (3.4 x 35mm) | | Load Direction | Characteristic Capacity (kN) – Per Pair of Anchors |
|--------------|----------------------|----------|----------------|--|
| | Header | Incoming | | Solid Timber Header (Min TR26) |
| FAS | 7 | 7 | 1 | 5.83 |
| | | | 2 | 3.40 |
| | 6 | 8 | 3 | 8.10 |
| | | | 4 | 3.35 |
| | 6 | 4 | 5 | 1.44 |
| | | | 6 | 8.10 |
| | | | 7 | 1.16 |
| | | | 8 | 0.89 |

SS

Slide Shoe

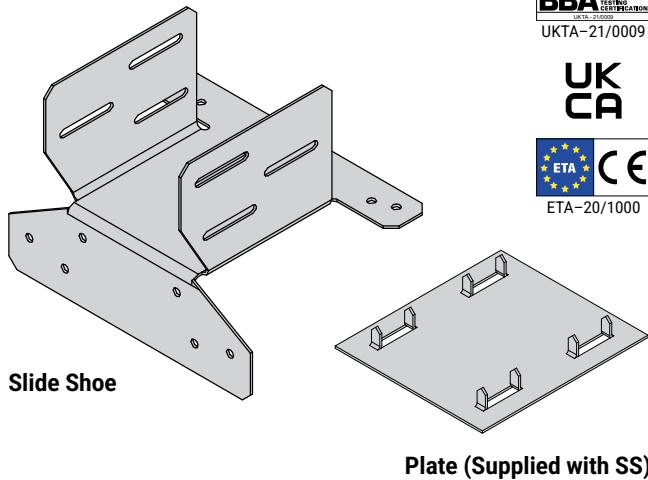

Slide Shoe

Plate (Supplied with SS)

The SS allows for a secure fixing and horizontal movement between raised tie/scissor trusses and the wallplate.

Features & Benefits

- Provides a maximum of 26mm lateral movement without compromising its resistance to uplift

Material Specification

- Galvanised mild steel – Z275

Fixings


| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi

Available Sizes

| Product Code | Truss Width (mm) | Hanger Width (W) (mm) |
|--------------|------------------|-----------------------|
| SS-38 | 35 | 38 |
| SS-50 | 47 | 50 |
| SS-75 | 70 (2 ply 35) | 75 |
| SS-100 | 94 (2 ply 47) | 100 |
| SS-150 | 141 (3 ply 47) | 150 |
| SS-200 | 188 (4 ply 47) | 200 |


Dimensions (mm)

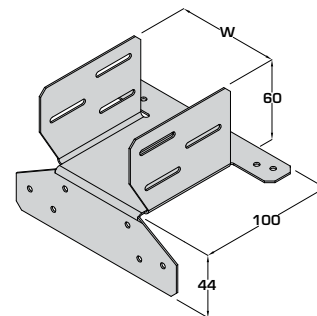

Installation Instructions


Typically used on one or both ends of the truss as determined by the Truss Designer.

Stage 1

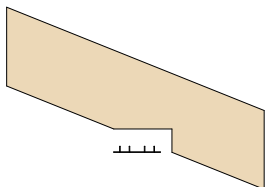


Tap bearing plate into position on underside of truss bearing area

Stage 2

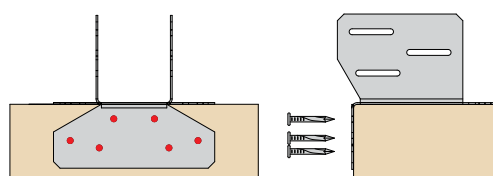


Position the slide shoe on the wall plate and nail to either face with 6No 3.4x35mm square twist nails

Stage 3

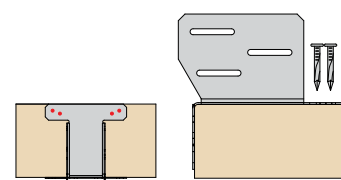


Nail to the top of the wall plate with 4No 3.4x35mm square twist nails

Stage 4

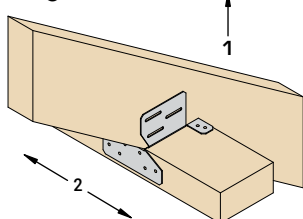

Locate truss in position

Stage 5

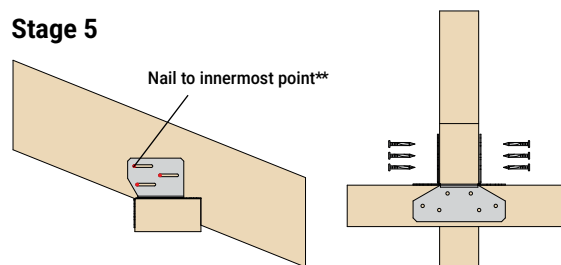


Nail through side flanges into the rafter with 6No 3.4x35mm square twist nails

**Allows the rafter to deflect and therefore there is no horizontal thrust transferred into the wall head


Load Data

| Product Code | Fixings (3.4 x 35mm) | | Load direction | Characteristic Capacity (kN) |
|---|----------------------|----------|----------------|--------------------------------|
| | Header | Incoming | | Solid Timber Header (Min TR26) |
| SS-38, SS-50, SS-75, SS-100, SS-150, SS-200 | 10 | 6 | 1 | 4.10 |
| | | | 2 | 2.60 |


Restraint Overview

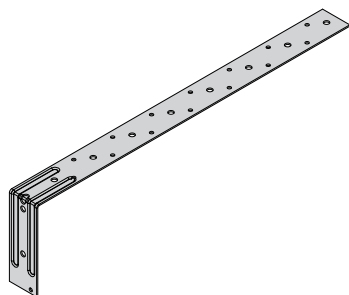


PFS
Page 130

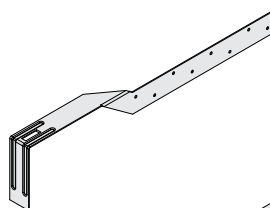

PST
Page 131

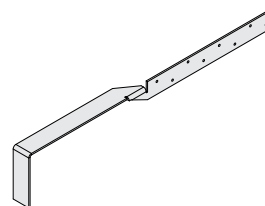


PSC
Page 131




PSB
Page 131

LATERAL RESTRAINT PERPENDICULAR – FLOORS & ROOFS



VRS
Page 138

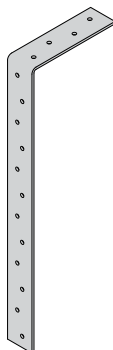

LDGS
Page 139



RST-1
Page 137



RST-2
Page 137



RST-3
Page 137


VERTICAL RESTRAINT



ST-PFS
Page 136

STAINLESS STEEL


UPLIFT RESISTANCE

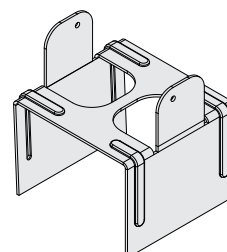

GRB
Page 135

GABLE RESTRAINT

Restraint Straps (Domestic Floors)

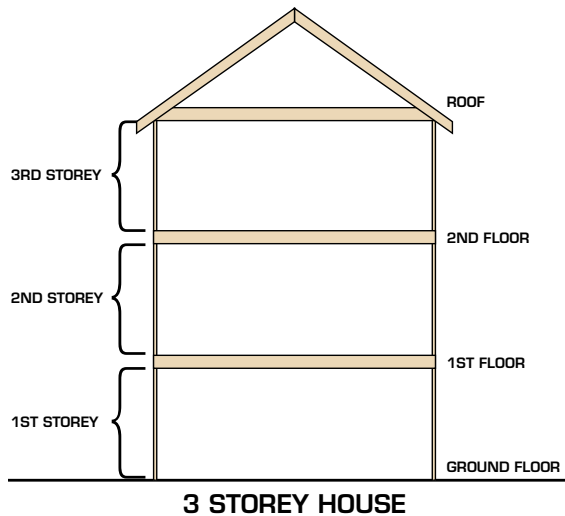

Lateral restraint of the walls can be provided by the floor, the restraint must be provided parallel and perpendicular to the floor joists.

The type of restraint straps required and the centres at which they are placed depend on the joist end detail and region in which the house is built.

The information we provide has been compiled using the minimum requirement from the Building Regulations 2010 approved document A, Scottish Building regulation domestic, NHBC standards, British Standards BS 5628-1:2005 Annex D and PD 6697:2019 Recommendations for the design of masonry structures to BS EN 1996-1-1 and BS EN 1996-2.


These have been issued as guidance only, the overall responsibility lies with the Building Designer.

For 3rd floor and above typically strap centres are reduced to 1.25m on all floors, please refer to the building standards or building designer for guidance.

All straps require a full storey of block work above to achieve the full 8kN declared load capacity.

Parallel Restraint

PSB strap with built in detail

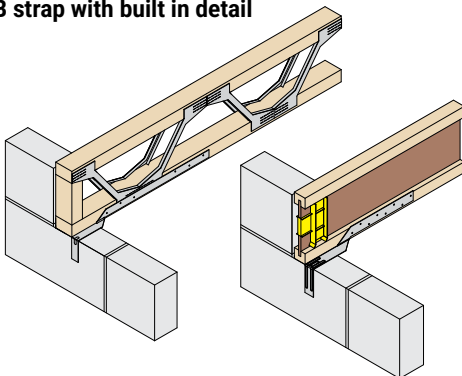


- The strap should be nailed with a minimum of 8No 3.4x35mm Square Twist Nails into the joist bottom flange/chord

| Detail | Region | Floor Level | | |
|----------|-----------------|---|-----------|--|
| | | Ground Floor | 1st Floor | 2nd Floor |
| Built in | England & Wales | Where joists have a minimum bearing of 90mm no additional restraint is required (additional PSB straps required each side of opening where openings exceed 600mm) | | |
| | Scotland | As above | | PSB straps required at 1.25m max centres |

Please refer to page 141 for further information on PSB straps

PST strap with non-restraint hanger

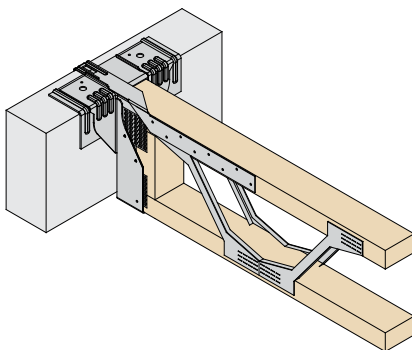


- The strap should be nailed with a minimum of 8No 3.4x35mm Square Twist Nails into the joist top flange/chord

| Detail | Region | Floor Level | | |
|---|-----------------|---------------------------------------|-----------|--|
| | | Ground Floor | 1st Floor | 2nd Floor |
| Non-Restraint Hangers (JHI/JHIR/RB-JHI/RB-JHIR) | England & Wales | PST or PSC required at 2m max centres | | |
| | Scotland | PST or PSC required at 2m max centres | | PST or PSC required at 1.25m max centres |

Please refer to page 141 for further information on PST/PSC straps and table for the correct hanger / strap combination.

PSB strap with restraint hanger

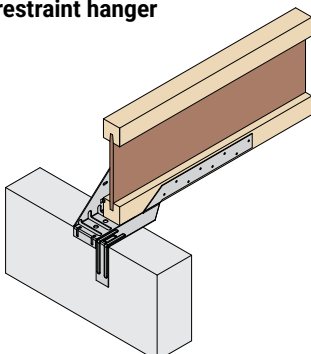

- The strap should be nailed with a minimum of 8No 3.4x35mm Square Twist Nails into the joist bottom flange/chord

| Detail | Region | Floor Level | | |
|----------|-----------------|--|-----------|--|
| | | Ground Floor | 1st Floor | 2nd Floor |
| Built in | England & Wales | No additional restraint required (additional PSB straps required each side of opening where openings exceed 600mm) | | |
| | Scotland | As above | | PSB straps required at 1.25m max centres |

Please refer to page 141 for further information on PSB straps


Restraint Straps (Domestic Floors)

Perpendicular Restraint

| Detail | Region | Floor Level | | |
|---------------|-----------------|--------------------------------|-----------|-----------------------------------|
| | | Ground Floor | 1st Floor | 2nd Floor |
| Perpendicular | England & Wales | PFS required at 2m max centres | | |
| | Scotland | PFS required at 2m max centres | | PFS required at 1.25m max centres |

Please refer to page 138 for further information on PFS straps


PFS surface fixed to I-Joist

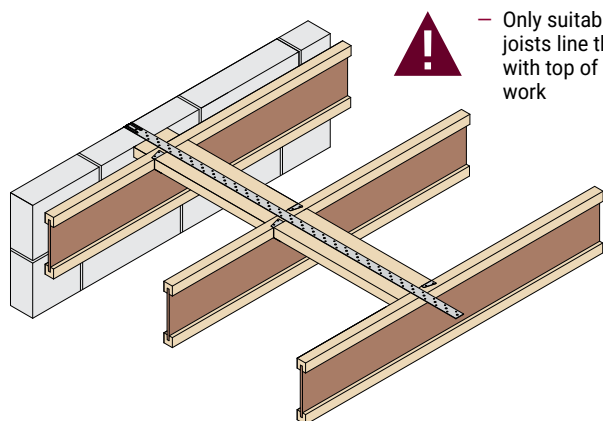

– Only suitable when joists line through with top of block work

- Noggins to be installed between the I-Joists with 2No UZ-Clips staggered either side (Noggins to be minimum width of half the I-Joist depth, to a maximum of 150mm x minimum depth 38mm - min C16 grade timber)
- Once nailed into position a skew nail is placed in the opposite corner to secure connection
- After fitting all noggins the PFS strap can then be located tight to the block work and centred on the noggins
- The strap should be nailed with a minimum of 8No 3.4 x 35mm square twist nails evenly spaced and into at least every joist
- Strap must extend over a minimum 3No joists


PFS through web of I-Joist

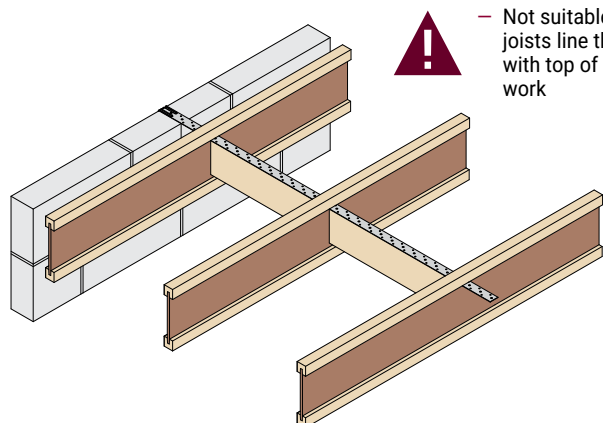

– Not suitable when joists line through with top of block work

- Cut a small slot in the I-Joist web, just under the top flange
- Slide the PFS through the slots and position tight against the block work
- To provide a fixing for the PFS, noggins must be installed between the I-Joists (Noggins to be minimum depth of half the I-Joist depth, to a maximum of 150mm x minimum width 38mm - min C16 grade timber)
- Each noggin should be nailed in place through the I-Joist web
- The strap should be nailed with a minimum of 8No 3.4 x 35mm square twist nails evenly spaced into the noggins
- Strap must extend over a minimum 3No joists

PFS through web of Open Web Joist

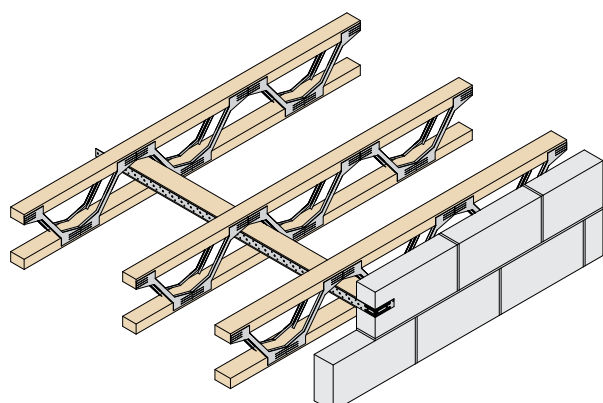


- Strongback to be installed as per manufacturer's guidelines
- Position PFS tight to block work and centred on block
- The strap should be nailed with a minimum of 8No 3.4 x 35mm square twist nails evenly spaced into the noggins
- Strap must extend over a minimum 3No joists

Scan or click to view installation videos



Restraint Straps (Domestic Roofs)

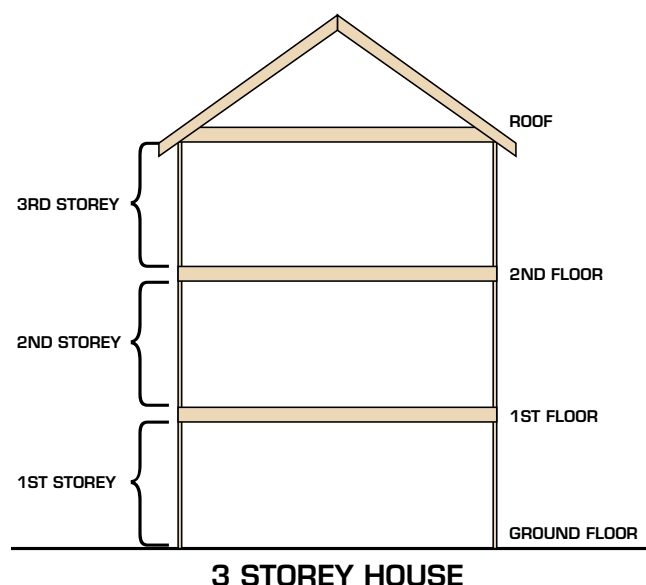


Lateral restraint of the walls can be provided by the roof, the restraint must be provided perpendicular to the roof trusses.

The information we provide has been compiled using the minimum requirement from Building Regulations 2010 approved document A, Scottish Building regulation domestic, NHBC standards and British Standard BS 5628-1;2005 Annex D.

These have been issued as guidance only, the overall responsibility lies with the Building Designer.

Vertical Restraint


Bent Strap To Wall Plate

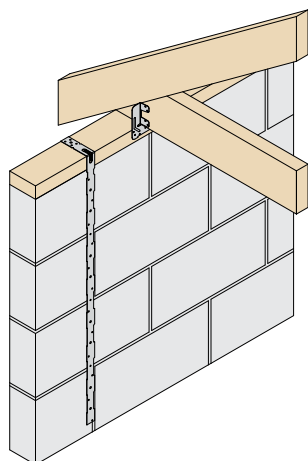

Fix VRS or LDGS to the wall plate with 2No 3.4 x 35mm square twist nails. Fixings into masonry to be specified by building designer.

Please refer to page 138 for further information on VRS straps

Twisted Strap To Truss

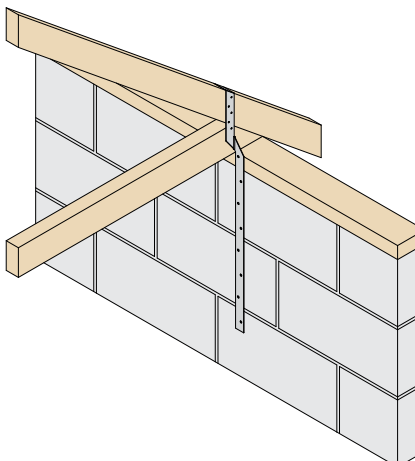

RST strap to be nailed to truss with 3.4 x 35mm square twist nails. Nail quantity dependant on uplift value. Fixings into masonry to be specified by building designer. Please refer to page 137 for further information on RST straps

Horizontal Restraint (Masonry Gables)

| Detail | Region | Floor Level | | |
|---------------|-----------------|--------------------------------|-----------------------------------|-----------------------------------|
| | | Up to and including 2 storeys | 3 storeys | 4 storeys |
| Perpendicular | England & Wales | PFS required at 2m max centres | | PFS required at 1.25m max centres |
| | Scotland | PFS required at 2m max centres | PFS required at 1.25m max centres | |


- Straps to be installed at not more than 2m centres (or 1.25m where appropriate) along gable end.
- Strap to be of sufficient length to be fixed to a minimum of 3no. Trusses.
- Longitudinal bracing to be fixed to each truss with 2no. 3.35 x 65mm round wire nails (in all details 3.1 x 90mm long mechanically driven nails may be substituted for 3.35 x 65mm long wire nails).
- Where the position of the strap does not coincide with an existing longitudinal truss brace, then the strap may be fixed to an additional 25 x 100mm longitudinal binder (as shown in following details). The binder to be fixed over a minimum of four trusses and fixed to each truss with 2no. 3.35 x 65mm round wire nails.
- Fix straps to longitudinal bracing with 8no. 3.4 x 35mm square twist nails, evenly spaced along the length of the strap (for NHBC warrantied buildings, in accordance with NHBC Standards 2017 section 7.2.8, 8no. 25 x 4mm steel screws shall be used instead of square twist nails).
- Parallel restraint straps are not required to roof trusses unless specified by building designer.

Restraint Straps (Domestic Roofs)

Horizontal Restraint (Masonry Gables)


Fixing to Longitudinal Truss Bracing (Fixed to Truss Web)

Scan or click to view
installation videos

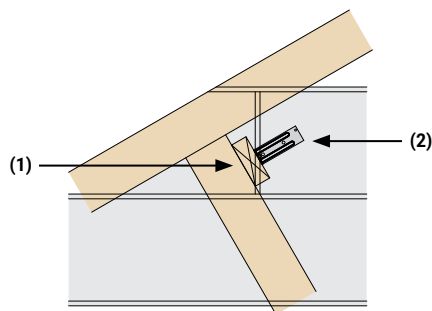


- Install PFS on the 25 x 100mm longitudinal truss bracing (1).
- Ensure the position of the longitudinal bracing and strap coincide with the blocks vertical joint.
- The 90deg bend of the strap is to be held tight against the cavity face of the inner leaf of blockwork (2), preferably located on the full block. Notch the blocks to accommodate the angle of the strap and ensure notch is fully mortared.

Fixing to Longitudinal Truss Bracing / Additional Longitudinal Binder (Fixed to Truss Web)

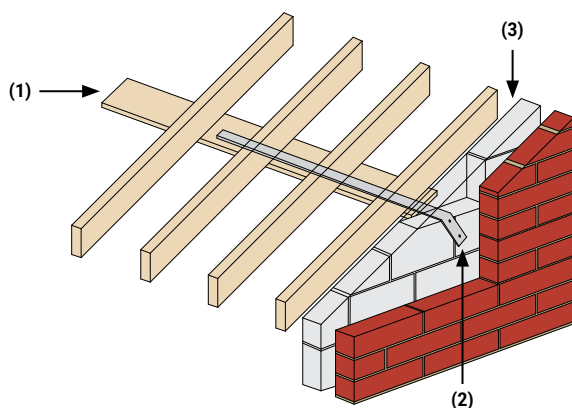


- Install PFS on the 25 x 100mm longitudinal truss bracing (1).
- Ensure the position of the longitudinal bracing and strap coincide with a horizontal blockwork joint.
- The 90deg bend of the strap is to be held tight against the cavity face of the inner leaf of blockwork (2), preferably located on a substantial piece of blockwork, i.e. over the centre of a full block, with a single cut block over the strap (3). Notch the blocks to accommodate the angle of the strap and ensure notch is fully mortared.

Fixing to Solid Noggins (Between Trusses)

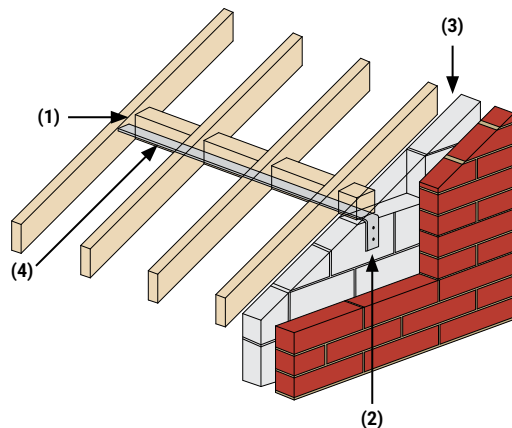

- Ensure the position of the straps coincides with the horizontal blockwork joint.
- Install PFS to underside of solid noggins (1). Noggins to be fixed horizontally to avoid twisting of the restraint straps.
- The 90deg bend of the strap is to be held tight against the cavity face of the inner leaf of blockwork (2), preferably located on a substantial piece of blockwork, i.e. over the centre of a full block, with a single cut block over the strap (3). Notch the blocks to accommodate the angle of the strap and ensure notch is fully mortared.
- Fix straps to noggins/trusses with 8no. 3.4 x 35mm square twist nails, evenly spaced along the length of the strap. Ensure a minimum of 2 fixings into noggin beyond the 3rd rafter (4).

Fixing to Longitudinal Truss Bracing / Additional Longitudinal Binder (Fixed to Truss Ceiling)

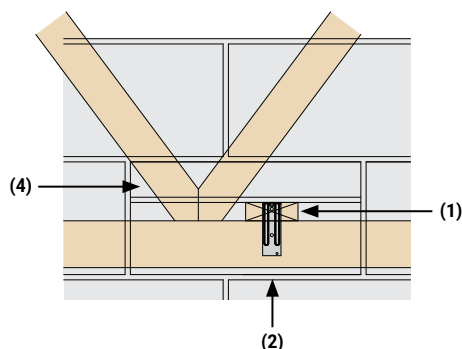



- Install PFS on the 25 x 100mm longitudinal truss bracing (1). Bracing to be fixed to each truss with 2no. 3.35 x 65mm round wire nails.
- Ensure the position of the longitudinal bracing and strap coincide with a horizontal blockwork joint, where this is not possible inserted a cut block to suit strap location (4).
- The 90deg bend of the strap is to be held tight against the cavity face of the inner leaf of blockwork (2), preferably located on a substantial piece of blockwork, i.e. over the centre of a full block.

Restraint Straps (Domestic Roofs)

Gable Restraint System

Class 1 Buildings/houses of single occupancy three storeys or less England & Wales and two storeys or less Scotland

Timber Gable to Masonry fixing detail to cold roofs – Continuous Wallplate

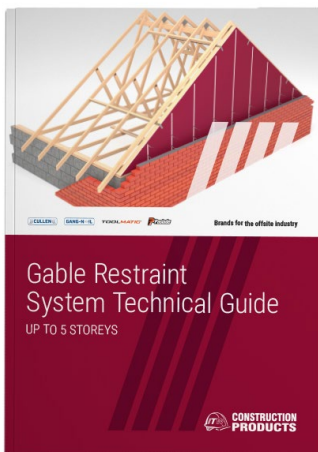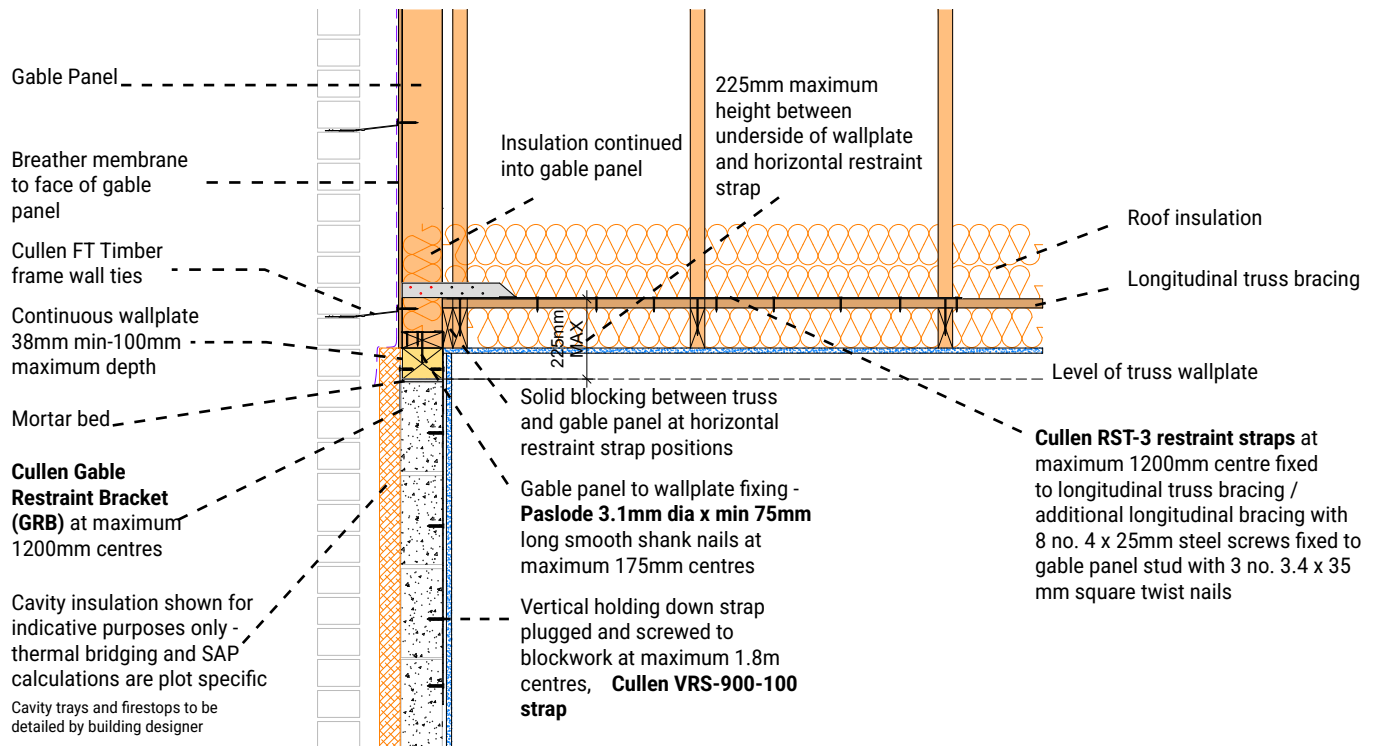

For wall tie, panel jointing & cavity tray details see our **Gable Restraint System Technical Guide.**

<https://online.flippingbook.com/view/228839799/>

Please contact our Technical department if you require further information.

Scan or click to view installation videos



Restraint Straps (Domestic Roofs)

Gable Restraint System



Cullen PFS restraint straps fixed to solid timber noggins between trusses at maximum 2000mm centres with 3.4 x 35mm square twist nails, 8 no. to noggins and 4 no. to gable panel (2 no. top face & 2 no. cavity face)

Cullen RST-3 restraint straps at maximum 1200mm centres fixed to additional longitudinal bracing with 8 no. 4 x 25mm steel screws fixed to gable panel stud with 3 no. 3.4 x 35mm square twist nails

Gable Panel
(with or without gable ladder)

Bottom rail of gable panel


Continuous wallplate 38mm min-100 mm maximum depth

Mortar bed

Cullen Gable Restraint Bracket (GRB) at maximum 1200mm centres

Gable Panel
(without gable ladder)


Truss profile

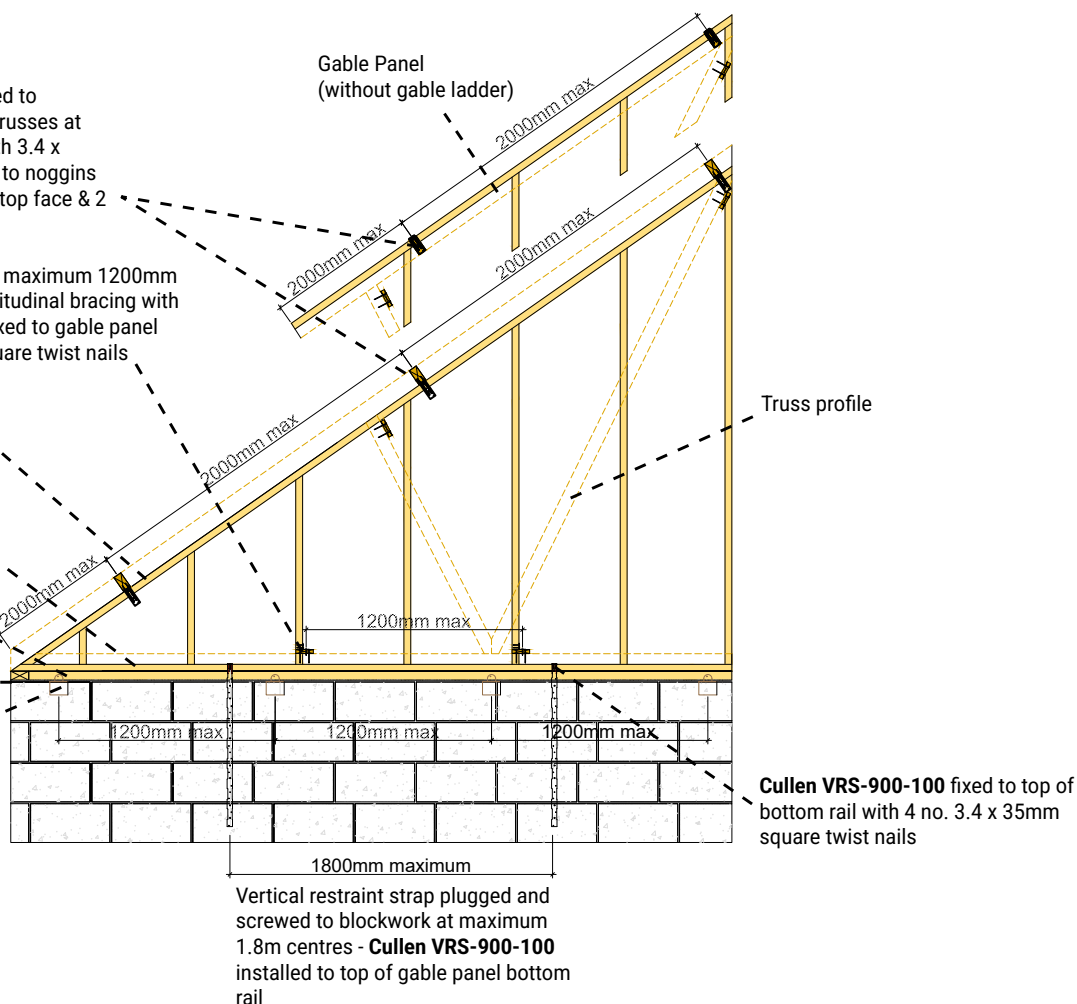

GRB

Gable Restraint Bracket


Patent granted: EP567179

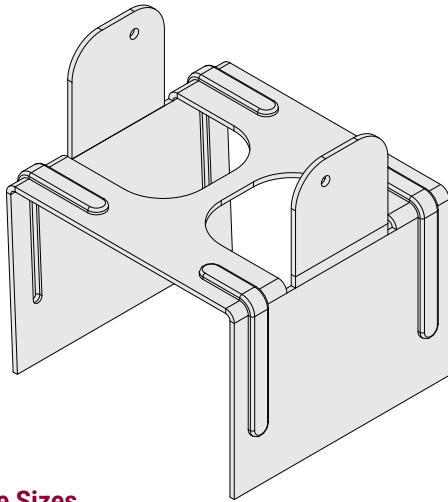

Available Sizes


| Product Code | Block Work Width (mm) | Wall Plate Depth (mm) | |
|--------------|-----------------------|-----------------------|---------|
| | | Minimum | Maximum |
| GRB-100 | 100 | 38 | 100 |

In Situ

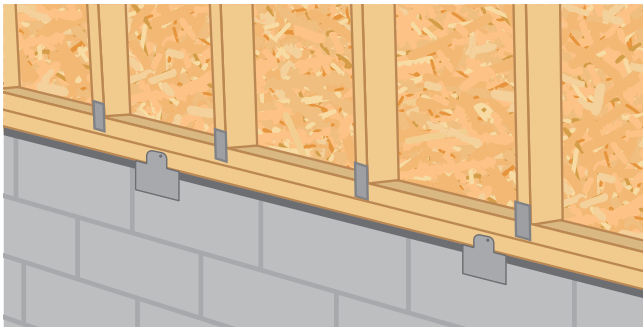

Please note the GRB forms part of a system and must be used in conjunction with the system straps and fixings as shown on Pages 133-134

Installation Instructions

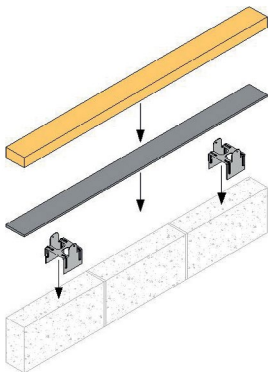


Components:



- Wallplate
- Mortar
- Gable Restraint Brackets
- Wall

Gable restraint brackets placed on wall at 1200mm** maximum centres (no fixings required).

**For buildings up to 3 storey England & Wales and 2 storey Scotland

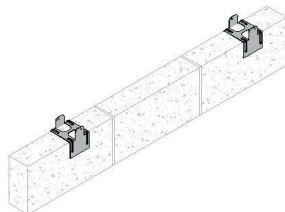

10mm maximum mortar bed on wall prior to wallplate being fixed.

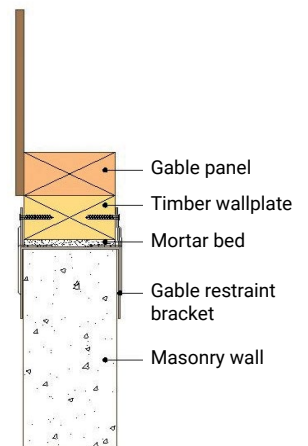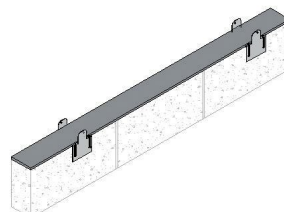

38–100mm deep wallplate bedded on mortar and fixed to gable restraint brackets with 3.5x40mm wood screws (2 no. per bracket).



Scan or click to view installation videos



The GRB is an engineered bracket that has been designed to provide a verified connection between a timber gable and masonry wall when used in conjunction with the Cullen Gable Restraint System*.

Part of the Cullen Gable Restraint System – Pg134 - 135

Features & Benefits

- Following the details from the system means no external engineering checks
- Safely transfers the loads into the roof diaphragm

Material Specification

- Galvanised mild steel – Z600

Approvals

- Meets NHBC Technical requirements*
- Designed to meet Class 1 & Class 2A buildings of Approved document A*

Fixings

3.5 x 40mm Wood Screw – supplied by others

*To meet the requirements of the NHBC the GRB must be installed as a complete system with all associated products and fixings – Full specification and details of the Cullen Gable Restraint System can be found on pages 132 & 133.

RST

Restraint Strap Twist

Applications can be found on pages 130,132 and 133



RST-1



RST-2



RST-3

Available Sizes

| Product Code | Dimensions (mm) | | |
|--------------|-----------------|-----|------|
| | X | Y | Z |
| RST-1 | 405 | 205 | 200 |
| RST-2 | 848 | 275 | 573 |
| RST-3 | 1350 | 275 | 1075 |

| Product Code | Fixing Hole Qty | |
|--------------|-----------------|-------|
| | 4mm Ø | 6mm Ø |
| | Y | Z |
| RST-1 | 6 | 3 |
| RST-2 | 8 | 8 |
| RST-3 | 8 | 15 |

Load Data

| Performance | Tensile Capacity (kN) | Characteristic Tensile Capacity (kN) |
|-------------|-----------------------|--------------------------------------|
| Strap only | 7.50 | 11.80 |

| Performance | Fixings (3.4x35mm) | Characteristic Capacity (kN) |
|---|--------------------|------------------------------|
| Strap attached to truss/solid timber (Min. C16) | 3 | 5.69 |
| | 4 | 6.23 |
| | 5 | 6.76 |



Scan or click to view installation videos



The RST is a high performance strap which can be used to resist uplift.

Part of the Cullen Gable Restraint System – Pg134 - 135

Features & Benefits

- Unique geometry allows a fixing on two planes without the clash issues of standard twist straps
- Suitable for timber frame and masonry walls
- Can be used independently or in addition to truss clips/ framing anchors/hangers (see page 132)
- Also a suitable strap for providing lateral restraint to timber gables (see page 134)


Material Specification

- 30 x 1.2mm Galvanised mild steel – Z275

Fixings

To be specified by building designer

Dimensions (mm)

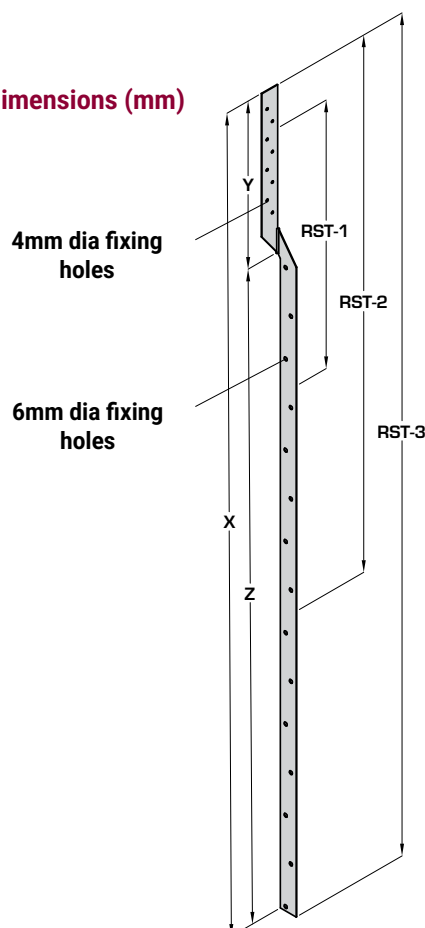

VRS


Vertical Restraint Strap

Applications can be found on pages 130, 132, 133


CE UK
CA




Scan or click to view
installation videos

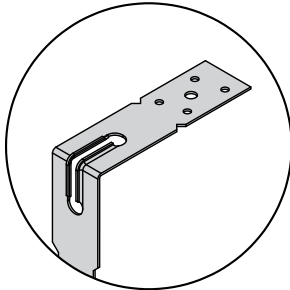

Engineered bend for increased
performance

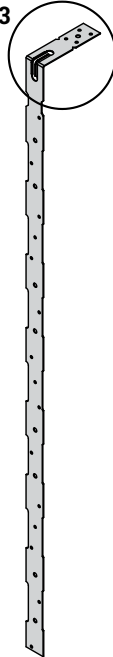

Available Sizes



| Product Code | F (mm) | B (mm) |
|--------------|--------|--------|
| VRS-900-100 | 900 | 100 |

The VRS is an engineered strap that has been designed to provide a convenient and secure method of fixing wall plates to timber and masonry walls.

Part of the Cullen Gable Restraint System – Pg134 - 135

Features & Benefits

- Designed to provide optimum performance
- Thinner profile than a standard tie-down strap with strengthening ribs, achieving the same performance as a traditional 30 x 2.5mm strap
- Find restraint details on page 132

Material Specification

- 30 x 1.2mm Galvanised mild steel – Z600

Approvals


- CE/UKCA marked in accordance with EN845-1
- Meets NHBC Technical requirements

Fixings

Dependant on application.

Dimensions (mm)

4mm Ø and 6mm Ø holes

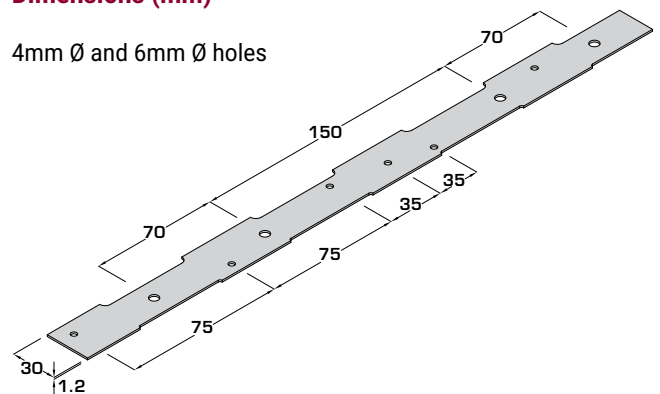

Load Data

| Performance | Fixings (3.4 x 35mm) | | Characteristic Tensile Capacity (kN) |
|---|-------------------------|--------------------------|--------------------------------------|
| | Wall Plate (3.4 x 35mm) | Timber Stud (3.4 x 35mm) | |
| Fixed to 3.5N/mm ² block work & nailed to min C16 grade timber wall plate* | 2 | n/a | 4.80 |
| Nailed to timber stud & wall plate (min C16 grade) | 2 | 8 | 4.80 |

*Fixings into masonry wall to be specified by building designer

LDGS

Light Duty Galvanised Strap



The LDGS is a light duty traditional strap.

Features & Benefits

- Typically used for vertical restraint

Material Specification



- 30 x 2.5mm Galvanised mild steel – Z275

Fixings

To be specified by building designer

Dimensions (mm)

6mm Ø holes spaced at 25mm centres

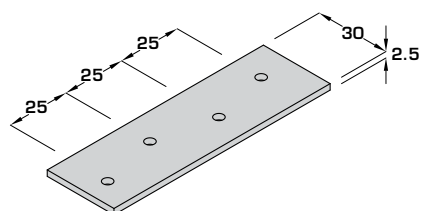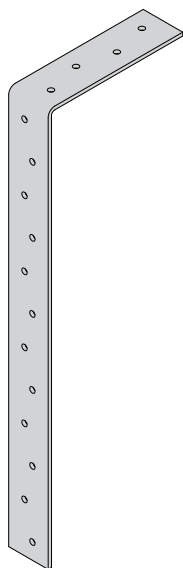


Available Sizes

FLAT STRAP



| Product Code | F (mm) |
|--------------|--------|
| LDGS-1000-F | 1000 |
| LDGS-1200-F | 1200 |

BENT STRAP

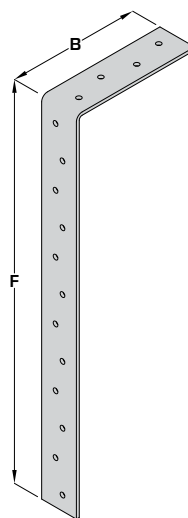

| Product Code | F (mm) | B (mm) |
|-----------------|--------|--------|
| LDGS-900-100-B | 900 | 100 |
| LDGS-1100-100-B | 1100 | 100 |

Load Data

| Performance | Fixings | Characteristic Tensile Capacity (kN) |
|---|--------------|--------------------------------------|
| | (3.4 x 35mm) | |
| Fixed timber wall plate (min C16 grade timber)* | 2 | 2.80 |
| Flat Strap | n/a | 17.28 |

*Full storey of block work required above the strap to meet performance.

PFS

Pre Formed Strap


Applications can be found on pages 129, 131, 132 and 133



Scan or click to view
floor installation
videos



Scan or click to view
roof installation videos

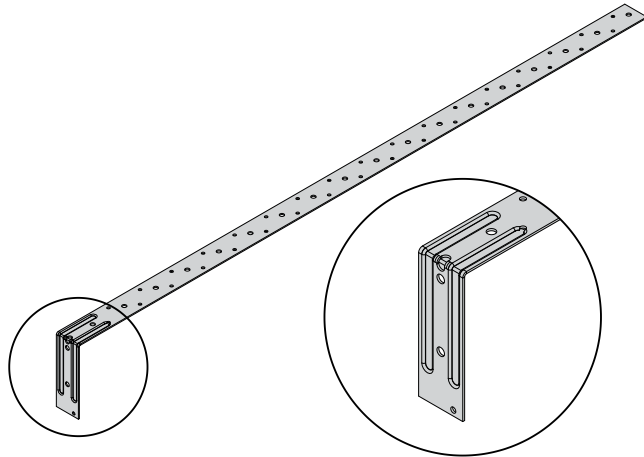

Engineered bend for increased performance

The PFS is an engineered strap that has been designed to provide enhanced performance and greater flexibility while laterally restraining floors and roofs.

Part of the Cullen Gable Restraint System – Pg134 - 135

Features & Benefits

- Typically used for lateral restraint in floor and roof applications
- Exceeds performance of traditional 30 x 5mm strap
- Restraint applications can be found on pages 131 - 133

Material Specification

- 35 x 1.5mm Galvanised mild steel – Z600 or Z275 (with edge protection)

Approvals

- CE/UKCA marked in accordance with EN845-1
- Meets NHBC Technical requirements
- Meets Homebond technical requirements

Fixings


- Dependant on application

| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |


*For use with Paslode PPNXi

Dimensions (mm)

4mm Ø and 6mm Ø holes

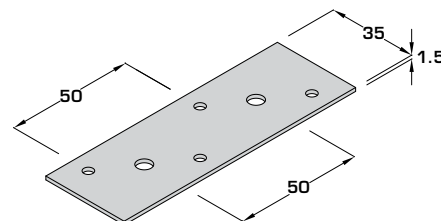

Available Sizes

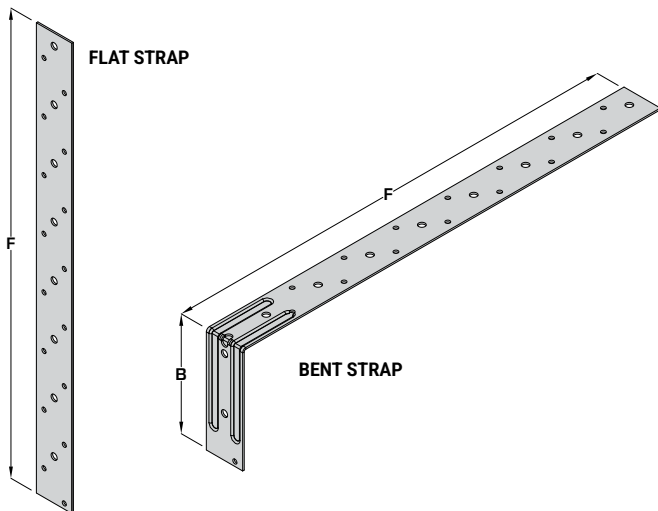

| Product Code | F (mm) |
|--------------|--------|
| PFS-1000-F | 1000 |
| PFS-1200-F | 1200 |
| PFS-1600-F | 1600 |
| PFS-2000-F | 2000 |

| Product Code | F (mm) | B (mm) |
|----------------|--------|--------|
| PFS-900-100-B | 900 | 100 |
| PFS-1100-100-B | 1100 | 100 |
| PFS-1500-100-B | 1500 | 100 |
| PFS-1900-100-B | 1900 | 100 |

Load Data

| Performance | Fixings | Characteristic Tensile Capacity (kN) |
|---|--------------|--------------------------------------|
| | (3.4 x 35mm) | |
| Built into 3.5N/mm ² block work & nailed to min C16 grade timber** | 8No | 8.80 |
| Flat Strap | n/a | 10.80 |

**Tested in accordance with the requirements of EN846-4 (with a vertical precompression of 0.4N/mm² to the top of the masonry specimen – equivalent to storey height of blockwork)

PS RANGE

Scan or click to view
installation videos



Pre Formed Strap

Applications can be found on pages 128



The PS range provides required parallel restraint to block work for joist hangers and, where required, build-in details.

Features & Benefits

- Typically used for lateral restraint
- Straps suit various blockwork sizes
- Restraint applications can be found on page 132

Approvals

- CE/UKCA marked in accordance with EN845-1
- Meets NHBC Technical requirements


Fixings

| Code | Description | Box Qty |
|--------|---|---------|
| 547389 | 3.4 x 35mm Square Twist Nails – LOOSE | 500 |
| 141185 | 3.4 x 35mm Square Twist Nails – COLLATED* | 2,500 |

*For use with Paslode PPNXi

Dimensions (mm)

4mm Ø holes

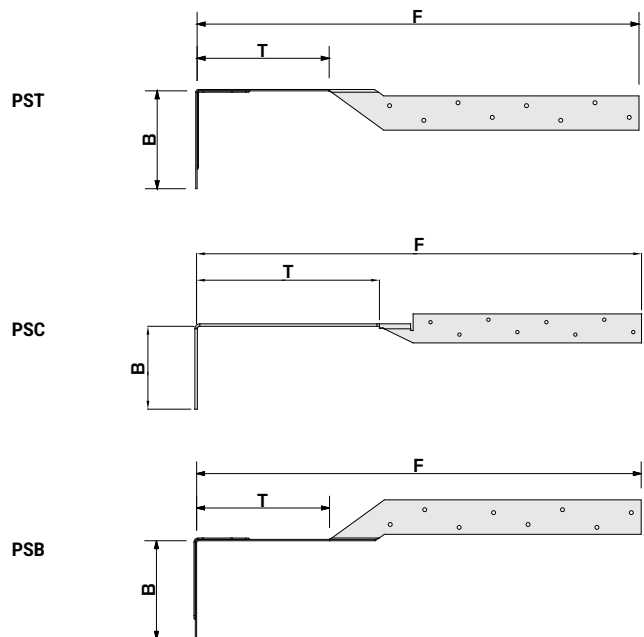

Available Sizes

| Product Code | Minimum Block Work Width (mm) | Maximum Block Work Width (mm) | B (mm) | F (mm) | T (mm) | Strap Material Thickness (mm) |
|--------------|-------------------------------|-------------------------------|--------|--------|--------|-------------------------------|
| PST-135 | 100 | 125 | 100 | 451.7 | 135 | 1.4 |
| PST-220 | 140 | 215 | 100 | 536.7 | 230 | 3 |
| PSC-220 | 100 | 215 | 100 | 536.7 | 220 | 3 |
| PSB | n/a | n/a | 100 | 451.7 | 135 | 1.4 |

Please refer to page 131 for guidance on strap requirement

Strap Selection

| Hanger Depth | I-Joist Depth (mm) | | | | |
|--------------|--------------------|-----|-----|---------|-----|
| | 220 | 240 | 300 | 350/360 | 400 |
| 195 | | | | | |
| 225 | PST | PSC | | | |
| 240 | | PST | | | |
| 250 | | | | | |
| 300 | | | PST | | |
| 350 | | | | PST | |
| 400 | | | | | PST |

| Hanger Depth | Open Web Joist Depth (mm) | | | | |
|--------------|---------------------------|---------|-----|---------|---------|
| | 219/230 | 253/254 | 304 | 375/380 | 418/424 |
| 195 | | | | | |
| 225 | PST | PSC | | | |
| 240 | | PST | | | |
| 250 | | PST | | | |
| 300 | | | PST | | |
| 350 | | | | PSC | |
| 400 | | | | | PSC |

Load Data

| Performance | Fixings | Characteristic Tensile Capacity (kN) |
|---|--------------|--------------------------------------|
| | (3.4 x 35mm) | |
| Built into 3.5N/mm ² block work & nailed to min C16 grade timber** | 8No | 8.00 |

**Tested in accordance with the requirements of EN846-4 (with a vertical precompression of 0.4N/mm² to the top of the masonry specimen – equivalent to storey height of blockwork)

Brands for the Offsite Industry

About Cullen

Cullen Timber Engineering Connectors have been synonymous with innovation. Chosen for the highest quality and compliance, our range of timber engineering solutions will become a mainstay of your most valued business assets.



About Gang-Nail

Gang-Nail is re-defining offsite component productivity with its metal connecting systems and software raising industry standards for the manufacture of floor, roof and wall solutions.



The Gang-Nail brand of punched metal plate connectors; award-winning Gang-Nail Truss Frame, SpaceStud, and roof trusses along with our metal open web; SpaceJoist and SpaceRafter is continuously chosen for its reliable quality and compliance.

About Paslode

Paslode premium nails are manufactured to perfectly accompany your handheld Paslode tool, providing consistent optimised fixing performance, delivering a clean, flush finish even in the toughest materials and poor weather conditions.



The 360Xi and IM350+ Framing systems provide professional users with the best in class solutions for wood to wood fixings whilst the PPNXi is the 1st positive placement nailer on the market, providing an efficient and safe way of installing hangers, brackets and straps.

About SPIT

SPIT is a leading manufacturer of direct fastening systems into concrete and steel. Recognised as one of the well-known direct fixing brands within the construction industry, we also pride ourselves on providing the very best in heavy duty, mechanical and chemical fixings.



With leading products in our range such as the Pulsa concrete gas nailer and Tapcon concrete screws we ensure to uphold the high levels of quality in our products as we do in the service of our dedicated team.



Product Range Index

| | Page | | Page |
|---|-----------|--|-----------|
| 45L/R Face Fix 45° Hanger (EWP) | 89 | PFS Pre Formed Strap | 140 |
| 45L/R Face Fix 45° Hanger (Solid Timber/Roof Truss) | 117 | PS RANGE Pre Formed Strap | 141 |
| ACE Adjustable Connector Eaves | 88 | PSTS Paslode Structural Screw (EWP) | 97 – 100 |
| AWS Acoustic Wall Strap | 34 | PSTS Paslode Structural Screw (Timber Frame) | 36 |
| FAS Framing Anchor | 126 | PWS Party Wall Strap | 35 |
| FMHI Flexible Masonry Hanger | 18 – 20 | RA RANGE Restraint Angle Range | 24 – 27 |
| FT Timber Frame Wall Tie | 40 – 43 | RB-JHI Rapid Build Masonry Joist Hanger | 16 – 17 |
| FT-125-150 Timber Frame Wall Tie | 44 – 45 | RD-CDCR Corner Disproportionate Collapse Restraint | 38 |
| FTHI Flexible Timber Hanger (EWP) | 83 | RST Restraint Strap Twist | 137 |
| FTHI Flexible Timber Hanger (Solid Timber/Roof Truss) | 114 | SA-45 Skewed Angle 45° Hanger | 116 |
| GRB Gable Restraint Bracket | 136 | SB Support Bracket | 121 |
| HGG Heavy Girder To Girder | 108 | SHI Service Hole I-Joist | 101 |
| HMH Heavy Multi Hanger | 107 | SP Sole Plate Anchor | 32 |
| HMT High Movement Timber Frame Wall Tie | 46 – 47 | SS Slide Shoe | 128 |
| HRS Head Restraint Screw | 37 | Steel Connections | 77 – 79 |
| HUH Heavy Universal Hanger (I-Joist) | 66 – 69 | ST-PFS/ST-PFS-M Timber Frame Holding Down Strap | 31 |
| HUH Heavy Universal Hanger (Open Web) | 70 – 76 | TA Truss Anchor | 124 – 125 |
| HV-GR Hi-Vis Gripper | 28 – 29 | TA-1 Framing Anchor | 126 |
| I-Clip Multiple I-Joist Connector | 93 – 94 | TC Truss Clip | 123 |
| IR-CLIP Insulation Retaining Clip | 33 | TM Midi Shoe | 105 |
| JHI Masonry Joist Hanger | 14 – 15 | TS Truss Shoe | 106 |
| KH Kwiki Hanger Standard Leg | 110 | UH Universal Hanger (I-Joist) | 52 – 59 |
| KHL Kwiki Hanger Long Leg | 111 | UH Universal Hanger (Open Web) | 60 – 65 |
| KM Mini Hanger (EWP) | 82 | UZ Clip Noggin Support (Timber Frame) | 48 |
| KM Mini Hanger (Solid Timber/Roof Truss) | 104 | UZ Clip Noggin Support (EWP) | 90 – 92 |
| LAB Angle Bracket | 115 | VHGG Very Heavy Girder To Girder | 109 |
| LDGS Light Duty Galvanised Strap | 139 | VRC Variable Ridge Connector | 86 – 87 |
| MH RANGE Multi Hanger (EWP) | 80 – 81 | VRS Vertical Restraint Strap | 138 |
| MH RANGE Multi Hanger (Solid Timber/Roof Truss) ... | 112 – 113 | VS Variable Skewed Timber Hanger (EWP) | 84 – 85 |
| M-STD/M-RTN Very High Load Masonry Hanger | 21 | VS Variable Skewed Timber Hanger (Solid Timber) | 118 – 119 |
| NP Nail Plate | 120 | VSM Variable Skew Masonry Hanger | 22 – 23 |
| OW-Clip Multiple Joist Connector | 95 – 96 | | |

The information given in this document is believed to be current and accurate as at the date of publication.
As part of our continuous product development, we reserve the right to revise specifications without notice.

Copyright © 2025 ITW

All rights reserved. This document (including text, material, pictures, specifications and dimensions contained in it) may not be reproduced, transmitted or distributed or otherwise used in any way or by any means, except with the prior express permission of ITW Construction Products Offsite.



Brands for the offsite industry

Cullen Technical Support
email: technical@itwcp.com

April 2025*

*Subject to change at discretion
of ITW Construction Products Offsite

1 Wheatstone Place
Southfield Industrial
Estate
Glenrothes
Fife KY6 2SW
t +44(0) 1592 771 132
f +44(0) 1592 771 182
e orders@itwcp.com
www.itwcp-offsite.co.uk



**CONSTRUCTION
PRODUCTS**